Noark

Catalog

MxP UL67 Panelboard Components Kit

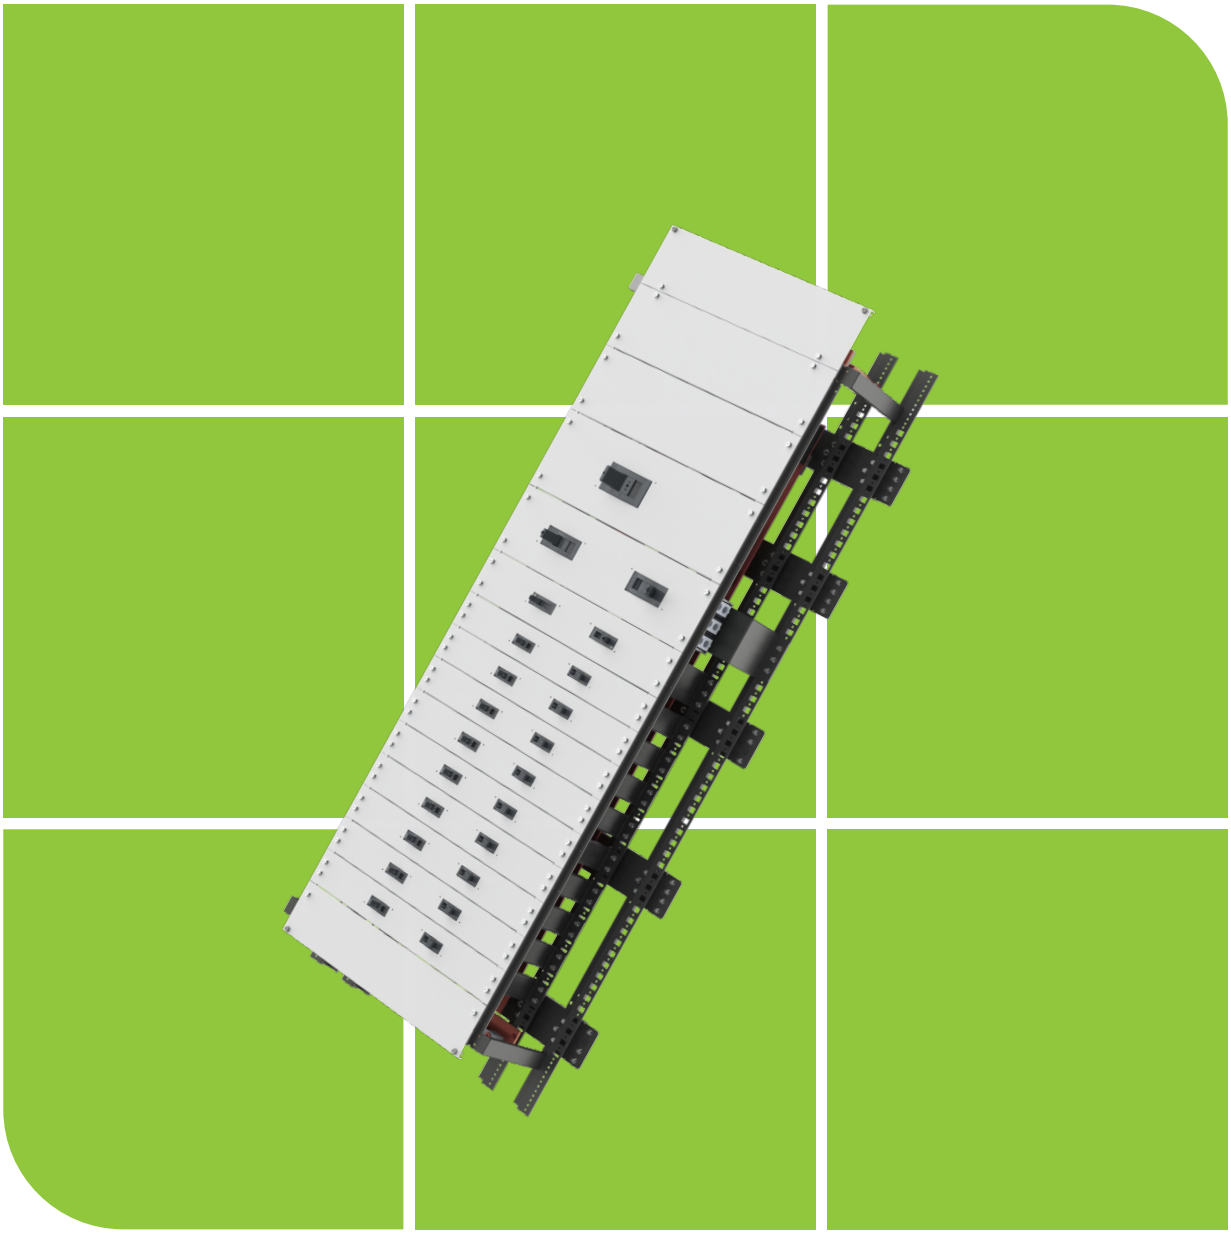

Excellent Products. Exceptional Value.

na.noark-electric.com

ABOUT US

NOARK Electric is a global manufacturer of low-voltage electrical components for industrial applications. We specialize in motor controls and circuit protection for original equipment manufacturers. Our mission is to provide customers with the highest quality products at an exceptional value and back them with world-class service and support. Every NOARK product is tested and certified to the highest industry standards and covered by our exclusive five-year limited warranty.

Research and Development
The entire portfolio of high-quality NOARK products is designed for manufacturing and assembly (DFMA). Each component is developed in-house by our engineering team to meet the strictest standards and performance requirements. This dedication to excellence has led to the development of patented technology found in many of our products.

World-class Manufacturing
After being thoroughly tested, approved and certified – each NOARK product is sent into production at our state-of-the-art manufacturing facilities. This allows us to maintain strict quality control standards throughout the manufacturing process. In addition, NOARK Electric adheres to a policy of environmental protection and sustainability.

North American Distribution
NOARK's distribution centers are located in Addison, TX and Kitchener, ON, with the aim of ensuring prompt and reliable deliveries of the entire product range to our customers all over North America. Our supply chain team works closely with our factories and logistics partners to ensure the availability of our products on the North American market and provide logistics services on the level which our customers expect. NOARK Electric is a subsidiary of the largest electrical manufacturing group in Asia with over 40 thousand employees and sales revenue of $26 billion USD. We have corporate facilities in Texas, Shanghai and Prague to service the requirements of individual markets and countries.

140+	2300+	40+	20+	4	30+	40,000
Countries	Overseas Distributors	Overseas Subsidiaries	Logistics Centers	R & D Centers	Global Manufacturing Bases	Employees Worldwide

TABLE OF CONTENTS

MxP UL67 Panelboard Components Kit

A. MxP UL67 Panelboard Components Kit

a. Overview 01
b. Features 02
c. Product Label 02
d. Product Selection Guide (PSG) 03
i. MxPL Panelboard Interior 03
ii. MxP-CK Breaker Connection Kits 04
iii. MxP-ML Main Lug Kit/Through-Feed Lug Kit 05
iv. MxP-NK Neutral Terminal Kit 06
V. MxP-GK Ground Terminal Kit 07
Vi. MxP-DF Dead Front Cover 08
Vii. MxP-BC Blank Cover 09
viii. MxP-HC Breaker Hole Cover 10
iX. Molded Case Circuit Breaker 11

e. Technical Specification 12
i. Panelboard Interior Chassis 12
ii. Molded Case Circuit Breakers 13
iii. Components dimensions 14
iv. MCCB Mounting Layout 14

B. Application Scenarios

a. UL891 Switchboard System 15
b. UL845 Motor Control Center (MCC) 16
c. UL67 Panelboard 16

MxP UL67 Panelboard Components Kit

Overview

MxP UL67 Panelboard Components Kit are a set of UL-tested connector kits and chassis exclusively developed for panelboards & switchboards. It provides fast assembly, standardized matching, and flexible customization for OEM manufacturers, supporting fast production and project delivery.

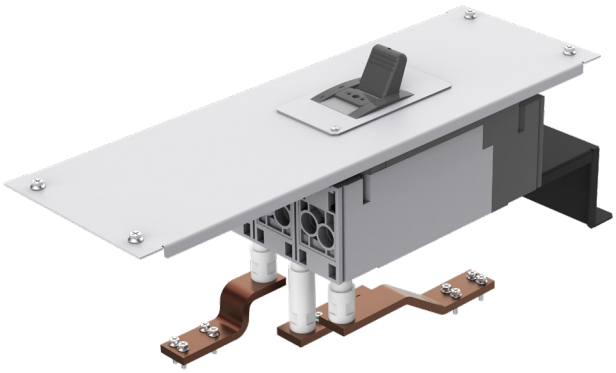

Features

- Flexible and modular designs for OEMs with demand for quick turnaround on projects
- Connector kits for M1 - M4 MCCBs up to 600A
- Modular interior chassis and full set of functional accessories including Main lug kits, Neutral kits, Ground kits, dead front covers, blank covers and breaker hole covers.
- Applicable to UL891 switchboards, UL845 MCC, UL67 panelboards

Standards and Certifications

- UL 67 Recognised Component File No. E543024
- CSA C22.2 No. 29
- Compatible with UL891 / UL845 / UL50E system standards

Benefits

- UL certified: Safe, reliable, compliant with UL & CSA standards
- Full series matching: One- stop purchase of panelboard interiors, connectors, accessories
- Modular design: Fast assembly, easy maintenance
- OEM- optimized: Fast delivery, flexible configuration, stable quality
- Wide compatibility: Match UL891 / UL845 / UL67 systems

MxP UL67 Panelboard Components Kit

Features

The UL67 OEM Panelboard Kit are UL tested Connector Kits and Chassis for panelboards & switchboards applications. The kits are designed for OEMs with need for quick turnarounds and design flexibility, offering connector kits for our standard molded case breakers, interior chassis and a full suite of functional accessories.

Some key features include:

- Standardized connector kits for M1–M4 MCCBs up to 600A
- Modular interior chassis up to 2000A & 45CS (1CS=1.18 inches)
- Support single/twin- mount (M1–M3) & single- mount (M4) breakers
- Complete Kit set: breaker connection, main lug, neutral, & ground kits, dead front covers, blank covers, and breaker hole covers.
- High compatibility with UL891 switchboard & UL845 MCC systems
- Stable structure, easy installation, reliable wiring

Product Label

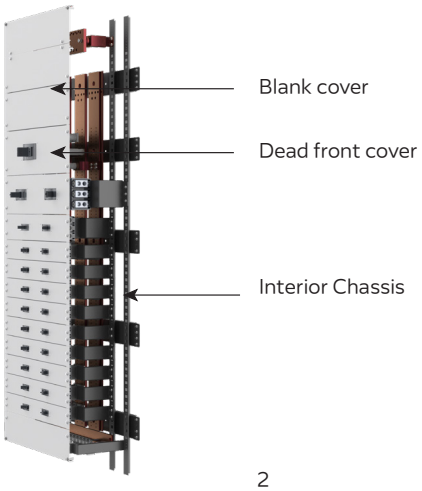

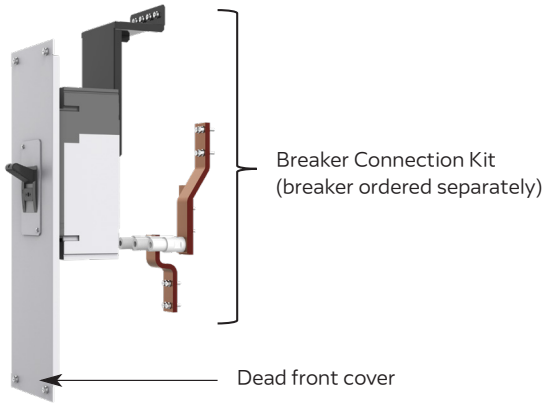

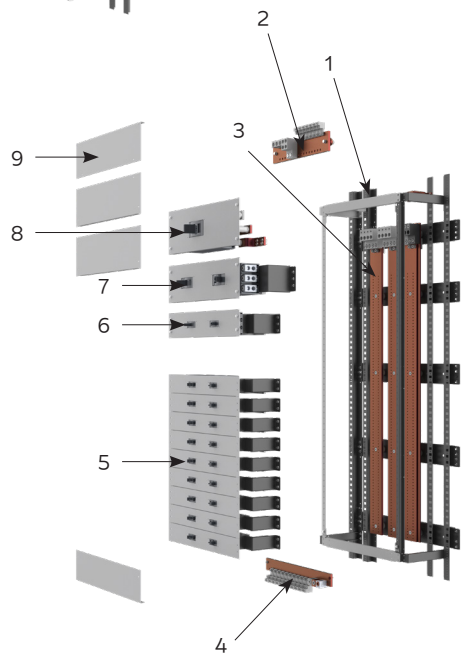

1. Base bracket assembly
2. Neutral terminal kit - Optional
3. Bus assembly
4. Grounding terminal kit - Optional
5. M1 breaker connection kit
6. M2 breaker connection kit
7. M3 breaker connection kit
8. M4 breaker connection kit
9. Dead front covers - Optional

MxP UL67 Panelboard Components Kit

Product Selection Guide

MxPL Panelboard Interior

Main structure of UL67 Kits, supports main lug only configuration, current up to 2000A, circuit space up to 45CS.

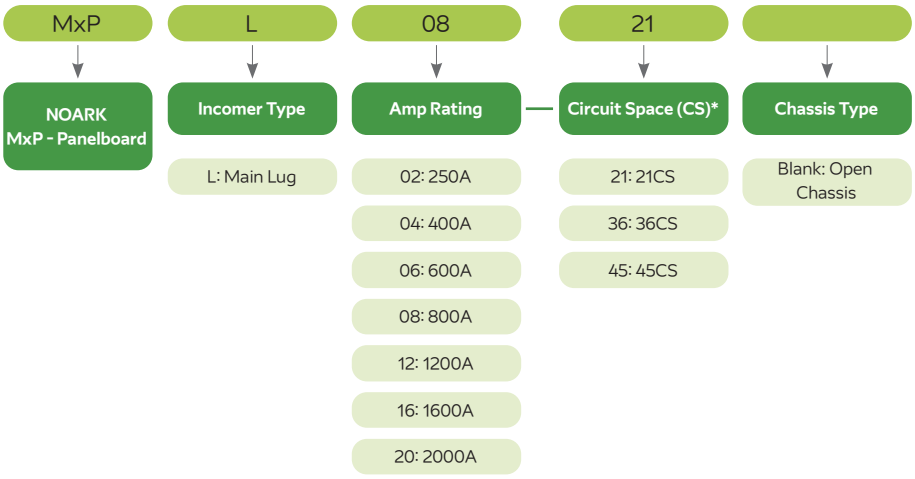

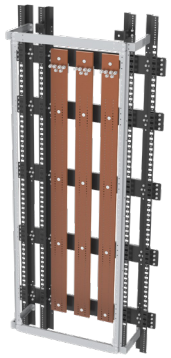

*1CS = 30mm (1.18”)

Model List

Item Number	Catalog Name	Description
1600402	MxPL02-21	Panelboard interior, Main Lug Only, 250A, 21CS
1600403	MxPL02-36	Panelboard interior, Main Lug Only, 250A, 36CS
1600404	MxPL02-45	Panelboard interior, Main Lug Only, 250A, 45CS
1600402	MxPL04-21	Panelboard interior, Main Lug Only, 400A, 21CS
1600403	MxPL04-36	Panelboard interior, Main Lug Only, 400A, 36CS
1600404	MxPL04-45	Panelboard interior, Main Lug Only, 400A, 45CS
1600402	MxPL06-21	Panelboard interior, Main Lug Only, 600A, 21CS
1600403	MxPL06-36	Panelboard interior, Main Lug Only, 600A, 36CS
1600404	MxPL06-45	Panelboard interior, Main Lug Only, 600A, 45CS
1600402	MxPL08-21	Panelboard interior, Main Lug Only, 800A, 21CS
1600403	MxPL08-36	Panelboard interior, Main Lug Only, 800A, 36CS
1600404	MxPL08-45	Panelboard interior, Main Lug Only, 800A, 45CS
1600405	MxPL12-21	Panelboard interior, Main Lug Only, 1200A, 21CS
1600406	MxPL12-36	Panelboard interior, Main Lug Only, 1200A, 36CS
1600407	MxPL12-45	Panelboard interior, Main Lug Only, 1200A, 45CS
1600408	MxPL16-21	Panelboard interior, Main Lug Only, 1600A, 21CS
1600409	MxPL16-36	Panelboard interior, Main Lug Only, 1600A, 36CS
1600410	MxPL16-45	Panelboard interior, Main Lug Only, 1600A, 45CS
1600411	MxPL20-21	Panelboard interior, Main Lug Only, 2000A, 21CS
1600412	MxPL20-36	Panelboard interior, Main Lug Only, 2000A, 36CS
1600413	MxPL20-45	Panelboard interior, Main Lug Only, 2000A, 45CS

MxP UL67 Panelboard Components Kit

Product Selection Guide

Breaker Connection Kits (MxP-CK)

Used for reliable connection between breaker and interior chassis, matching M1–M4 MCCB.

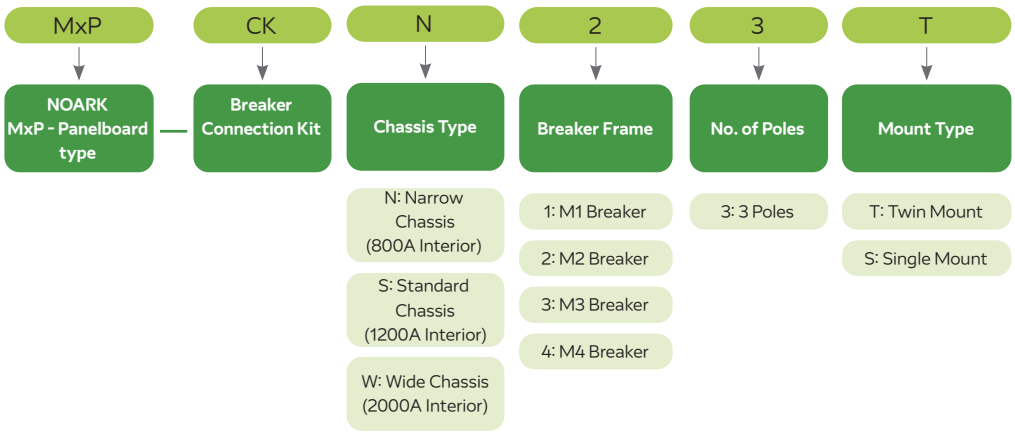



Model List

Item Number	Catalog Name	Description
1600359	MxP-CKN13T	Connection Kit, N Type, M1, 3P, Twin-Mounted
1600360	MxP-CKN23S	Connection Kit, N Type, M2, 3P, Single-Mounted
1600361	MxP-CKS13T	Connection Kit, S Type, M1, 3P, Twin-Mounted
1600362	MxP-CKS23T	Connection Kit, S Type, M2, 3P, Twin-Mounted
1600363	MxP-CKS33S	Connection Kit, S Type, M3, 3P, Single-Mounted
1600364	MxP-CKW13T	Connection Kit, W Type, M1, 3P, Twin-Mounted
1600365	MxP-CKW23T	Connection Kit, W Type, M2, 3P, Twin-Mounted
1600366	MxP-CKW33T	Connection Kit, W Type, M3, 3P, Twin-Mounted
1600367	MxP-CKW43S	Connection Kit, W Type, M4, 3P, Single-Mounted

MxP UL67 Panelboard Components Kit

Product Selection Guide

Main Lug Kit (MxP – ML)

For main cable incoming & through-feed connection.

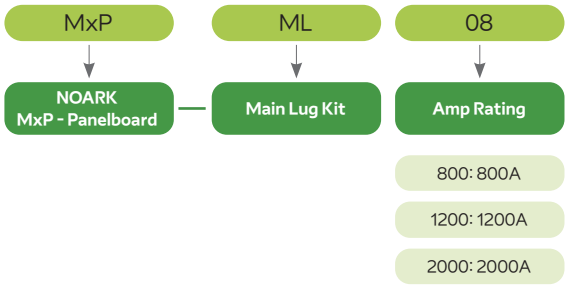

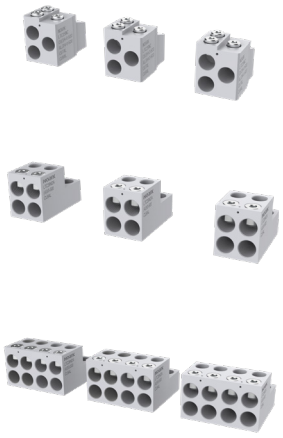

Model List

Item Number	Catalog Name	Description
1600393	MxP-ML800	Main Lug Kit, 800A
1600394	MxP-ML1200	Main Lug Kit, 1200A
1600395	MxP-ML2000	Main Lug Kit, 2000A

MxP UL67 Panelboard Components Kit

Product Selection Guide

Neutral Terminal Kit (MxP – NK)

Neutral busbar & wiring kit for three- phase four- wire system.

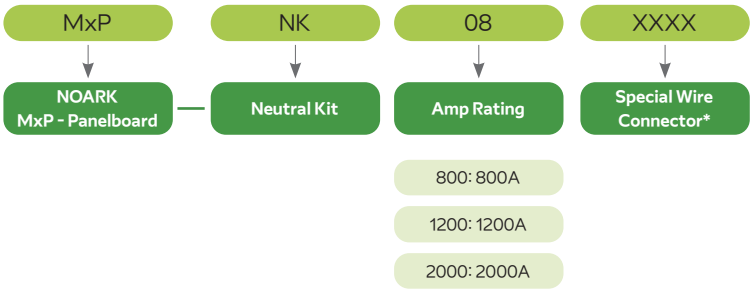

*May be followed by 1 to 4 digits or letters to denote special wire connector combinations installed.

Model List

Item Number	Catalog Name	Description
1600396	MxP-NK800	Neutral Kit, 800A
1600397	MxP-NK1200	Neutral Kit, 1200A
1600398	MxP-NK2000	Neutral Kit, 2000A

MxP UL67 Panelboard Components Kit

Product Selection Guide

Ground Terminal Kit (MxP – GK)

Protective grounding & bonding kit.

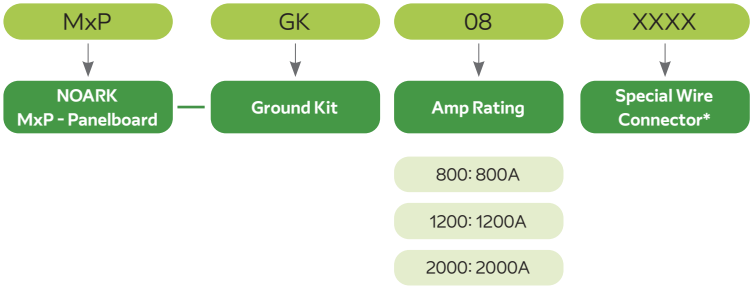



*May be followed by 1 to 4 digits or letters to denote special wire connector combinations installed

Model List

Item Number	Catalog Name	Description
1600399	MxP-GKB800	Ground Kit (Bonded), 800A
1600400	MxP-GKB1200	Ground Kit (Bonded), 1200A
1600401	MxP-GKB2000	Ground Kit (Bonded), 2000A

MxP UL67 Panelboard Components Kit

Product Selection Guide

Dead Front Cover (MxP-DF)

Seal unused circuit space (1CS / 1.5CS / 2CS / 3CS).

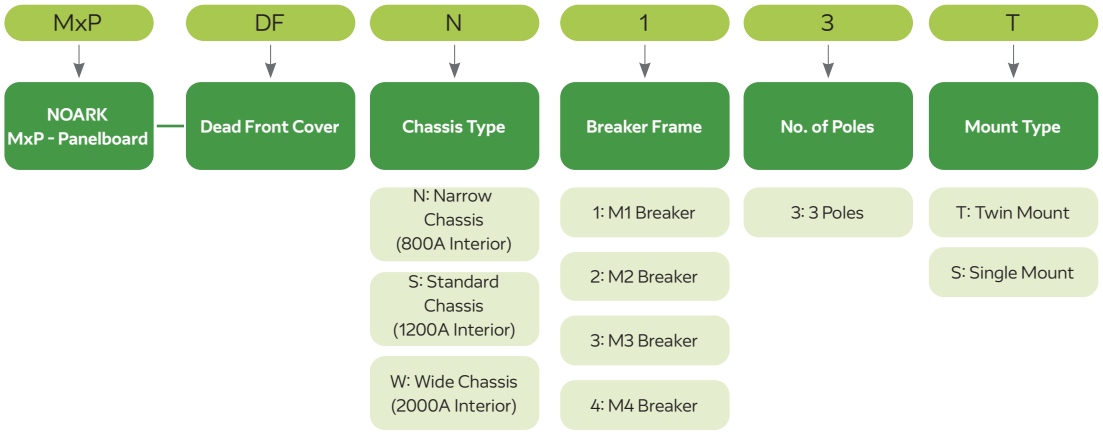



Model List

Item Number	Catalog Name	Description
1600368	MxP-DFN13T	Dead Front Cover, N Type, M1, 3P, Twin
1600369	MxP-DFN23S	Dead Front Cover, N Type, M2, 3P, Single
1600370	MxP-DFS13T	Dead Front Cover, S Type, M1, 3P, Twin
1600371	MxP-DFS23T	Dead Front Cover, S Type, M2, 3P, Twin
1600372	MxP-DFS33S	Dead Front Cover, S Type, M3, 3P, Single
1600373	MxP-DFW13T	Dead Front Cover, W Type, M1, 3P, Twin
1600374	MxP-DFW23T	Dead Front Cover, W Type, M2, 3P, Twin
1600375	MxP-DFW33T	Dead Front Cover, W Type, M3, 3P, Twin
1600376	MxP-DFW43S	Dead Front Cover, W Type, M4, 3P, Single

MxP UL67 Panelboard Components Kit

Product Selection Guide

Blank Cover (MxP-BC)

Safety isolation cover for breaker connection area.

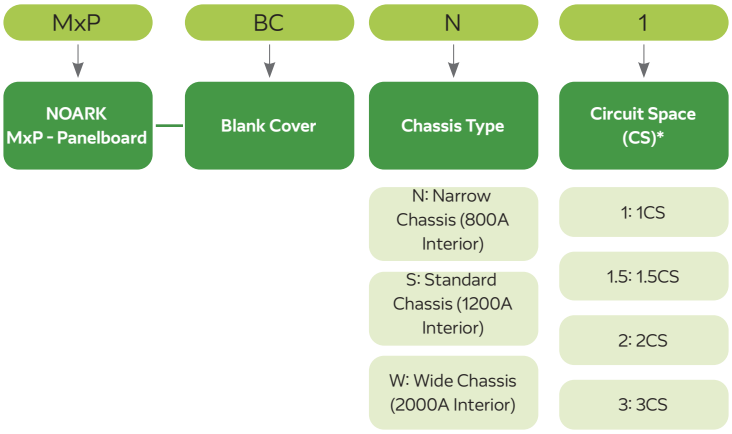

* 1CS = 30mm (1.18")

Model List

Item Number	Catalog Name	Description
1600377	MxP-BCN1	Blank Cover, N Type, 1CS
1600378	MxP-BCN1.5	Blank Cover, N Type, 1.5CS
1600379	MxP-BCN2	Blank Cover, N Type, 2CS
1600380	MxP-BCN3	Blank Cover, N Type, 3CS
1600381	MxP-BCS1	Blank Cover, S Type, 1CS
1600382	MxP-BCS1.5	Blank Cover, S Type, 1.5CS
1600383	MxP-BCS2	Blank Cover, S Type, 2CS
1600384	MxP-BCS3	Blank Cover, S Type, 3CS
1600385	MxP-BCW1	Blank Cover, W Type, 1CS
1600386	MxP-BCW1.5	Blank Cover, W Type, 1.5CS
1600387	MxP-BCW2	Blank Cover, W Type, 2CS
1600388	MxP-BCW3	Blank Cover, W Type, 3CS

MxP UL67 Panelboard Components Kit

Product Selection Guide

Breaker Hole Cover (MxP – HC)

Cover unused breaker installation holes.

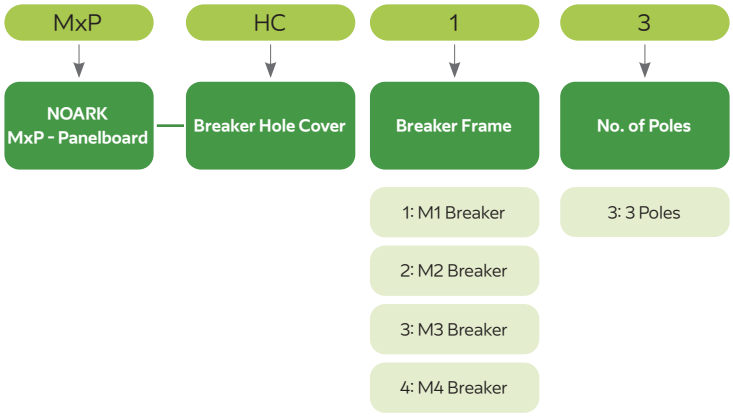

Model List

Item Number	Catalog Name	Description
1600389	MxP-HC13	Breaker Hole Cover, M1, 3P
1600390	MxP-HC23	Breaker Hole Cover, M2, 3P
1600391	MxP-HC33	Breaker Hole Cover, M3, 3P
1600392	MxP-HC43	Breaker Hole Cover, M4, 3P

MxP UL67 Panelboard Components Kit

Product Selection Guide

Molded Case Circuit Breaker

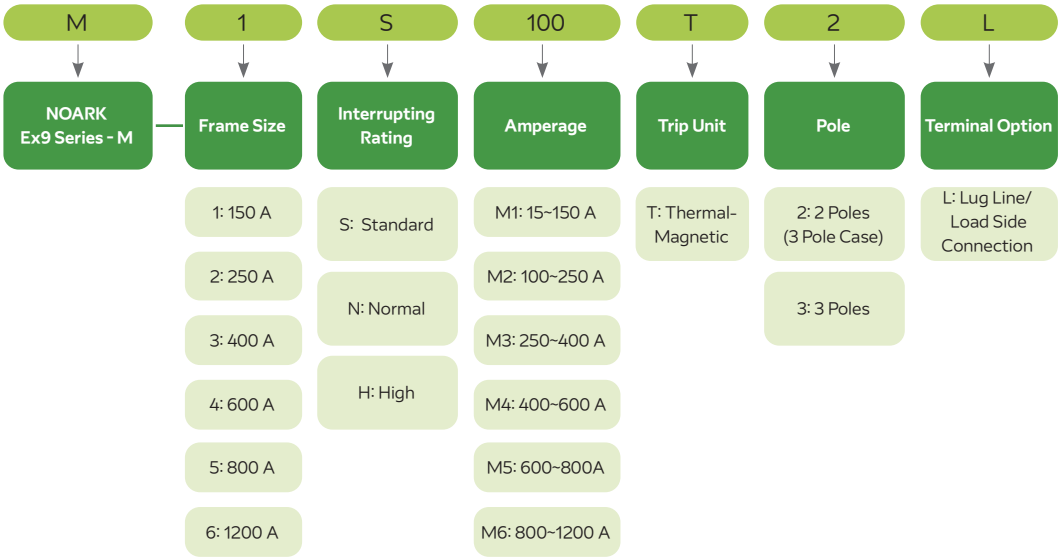

Model List

Item Number	Catalog Name	Description
1101551	M1H30T3L	MCCB UL 489, M1H, 150 A Frame Size, 100kA@480Vac, 30A, 3P, Lug Line/Load Side
1101556	M1H60T3L	MCCB UL 489, M1H, 150 A Frame Size, 100kA@480Vac, 60A, 3P, Lug Line/Load Side
1101560	M1H100T3L	MCCB UL 489, M1H, 150 A Frame Size, 100 kA @ 480 Vac, 100A, 3P, Lug Line/Load Side
1102175	M1H150T3L	MCCB UL 489 - 3P, M1H, 150 A Frame Size, 100kA@480Vac, 150A, 3P, Lug Line/Load Side
1100043	M1N30T3L	MCCB UL 489, M1N, 150 A Frame Size, 65kA@480Vac, 30A, 3P , Lug Line/Load Side
1100048	M1N60T3L	MCCB UL 489, M1N, 150 A Frame Size, 65kA@480Vac, 60A, 3P , Lug Line/Load Side
1100030	M1S30T3L	MCCB UL 489, M1S, 150 A Frame Size, 35kA@480Vac, 30A, 3P , Lug Line/Load Side
1100035	M1S60T3L	MCCB UL 489, M1S, 150 A Frame Size, 35kA@480Vac, 60A, 3P , Lug Line/Load Side
1101649	M2H200T3L	MCCB UL 489, M2H, 250 A Frame Size, 100kA@480Vac, 200A, 3P , Lug Line/Load Side
1101960	M2H250T3L	MCCB UL 489, M2H, 250 A Frame Size, 100kA@480Vac, 250A, 3P , Lug Line/Load Side
1100231	M2N200T3L	MCCB UL 489, M2N, 250 A Frame Size, 65kA@480Vac, 200A, 3P , Lug Line/Load Side
1101959	M2N250T3L	MCCB UL 489, M2N, 250 A Frame Size, 65kA@480Vac, 250A, 3P , Lug Line/Load Side
1101725	M3H350T3L	MCCB UL 489, M3H, 400 A Frame Size, 100kA@480Vac, 350A, 3P, Lug Line/Load Side
1101726	M3H400T3L	MCCB UL 489, M3H, 400 A Frame Size, 100kA@480Vac, 400A, 3P, Lug Line/Load Side
1100373	M3N350T3L	MCCB UL 489, M3N, 400 A Frame Size, 65kA@480Vac, 350A, 3P, Lug Line/Load Side
1100374	M3N400T3L	MCCB UL 489, M3N, 400 A Frame Size, 65kA@480Vac, 400A, 3P, Lug Line/Load Side
1101757	M4H500T3L	MCCB UL 489, M4H, 600 A Frame Size, 100kA@480Vac, 500A, 3P, with Lug terminal
1101752	M4H600T3L	MCCB UL 489, M4H, 600 A Frame Size, 100kA@480Vac, 600A, 3P, with Lug terminal
1100415	M4N500T3L	MCCB UL 489, M4N, 600 A Frame Size, 65kA@480Vac, 500A, 3P, Lug Line/Load Side
1100416	M4N600T3L	MCCB UL 489, M4N, 600 A Frame Size, 65kA@480Vac, 600A, 3P, Lug Line/Load Side

For complete list of MCCB products, please consult the MCCB catalog or Noark Website – https://na.noark-electric.com/master-catalogs/#mccb-catalog

MxP UL67 Panelboard Components Kit

Technical Specification - Panelboard Interior Chassis

Chassis		MxPL08			MxPL12			MxPL20		
Rated Current (A)		250, 400, 600, 800			1200			1600, 2000		
Vertical Busbar Sizes (in) per phase		(1) x 1/4 x 3			(1) x 1/4 x 4			(2) x 1/4 x 4		
Rated Voltage 50/60 Hz (Vac)		600								
Interior Circuit Space Options (CS)		21	36	45	21	36	45	21	36	45
Vertical Busbar Maximum Shorting Circuit Rating Capacity (kA rms)	240 Vac	150	150	150	150	150	150	150	150	150
	480 Vac	100	100	100	100	100	100	100	100	100
	600 Vac	50	50	50	50	50	50	50	50	50
Applicable Feeder Breakers	M1 Twin Mount	■			■			■		
	M2 Single Mount	■			-			-		
	M2 Twin Mount	-			■			■		
	M3 Single Mount	-			■			-		
	M3 Twin Mount	-			-			■		
	M4 Single Mount	-			-			■		
Applicable Feeder Breakers Circuit Space (CS)	M1 Twin Mount	3								
	M2 Single Mount	4								
	M2 Twin Mount	4								
	M3 Single Mount	6								
	M3 Twin Mount	6								
	M4 Single Mount	7								
Dimensions										
	Circuit Space	21	36	45	21	36	45	21	36	45
Interior Chassis Dimension in (mm)	L	50.6 (1286)	68.3 (1734.2)	78.9 (2004.2)	50.6 (1286)	68.3 (1734.2)	78.9 (2004.2)	50.6 (1286)	68.3 (1734.2)	78.9 (2004.2)
	W	21.5 (545.7)	21.5 (545.7)	21.5 (545.7)	25.5 (647.3)	25.5 (647.3)	25.5 (647.3)	35.5 (901.3)	35.5 (901.3)	35.5 (901.3)
	H	11.7 (297.17)	11.7 (297.17)	11.7 (297.17)	11.7 (297.17)	11.7 (297.17)	11.7 (297.17)	11.7 (297.17)	11.7 (297.17)	11.7 (297.17)
Main Lug Dimension (mm) & Cable Lug size	L	55			55			110		
	W	79.5			100			100		
	H	69			65			65		
	Lug Size	(3) 4/0 AWG – 500 kcmil			(3) 3/0 AWG – 500 kcmil			(6) 3/0 AWG – 500 kcmil		
Neutral Terminal Dimension (mm) & Lug size	L	410.4			512			512		
	W	97.73			109.73			149.1		
	H	98.17			123.67			116.37		
	Lug Sizes	(8) 10AWG - 2/0 AWG, (1) 4/0 AWG - 600 kcmil			(7) 10AWG - 2/0 AWG, (3) 4/0 AWG - 600 kcmil, (1) 3/0 AWG – 500 kcmil			(7) 10AWG - 2/0 AWG, (3) 4/0 AWG - 600 kcmil, (1) 3/0 AWG – 500 kcmil		
Ground Terminal Dimension (mm) & Lug size	L	356.8			560			560		
	W	77.5			87.5			107.5		
	H	76.7			76.7			71.7		
	Lug Sizes	(7) 10AWG - 2/0 AWG, (1) 4/0 AWG - 600 kcmil			(11) 10AWG - 2/0 AWG, (3) 4/0 AWG - 600 kcmil			(11) 10AWG - 2/0 AWG, (3) 4/0 AWG - 600 kcmil		
Minimum Enclosure Dimension W x H x D in (mm)		24 x 60 x 12 (609.6 x 1524 x 304.8)			28 x 90 x 12 (711.2 x 1524 x 304.8)			38 x 90 x 12 (965.2 x 1524 x 304.8)		

MxP UL67 Panelboard Components Kit

Technical Specification - MCCB

Frame		M1			M2			M3			M4		
Rated Current (A)		15 ~ 150			100 ~ 250			250 ~ 400			400 ~ 600		
Number of Poles		2*, 3			2*,3			2*,3			2*,3		
Breaker Type		S	N	H	S	N	H	S	N	H	S	N	H
Rated Voltage 50/60 Hz	Vac	600**			600**			600**			600**		
	Vdc												
Interrupting Capacity (kA rms)		M1			M2			M3			M4		
Circuit Breaker Ratings UL 489 CSA C22.2 (kA rms) Vac 50/60 Hz	240 Vac	50	100	150	50	100	150	65	100	150	65	100	150
	480 Vac	35	65	100	35	65	100	42	65	100	42	65	100
	600 Vac	14	20	25	14	20	25	18	25	30	22	30	50
	500 Vdc 2 Poles	20	35	50	20	35	50	35	50	65	35	50	65
	600 Vdc 3 Poles	20	35	50	20	35	50	35	50	65	35	50	65
Current Rating (A) @ 104 °F (40 °C)		15 ~ 150			100 ~ 250			250 ~ 400			400 ~ 600		
A = Adjustable Thermal-Magnetic Trip Units (Fixed) M = Magnetic	T = Thermal	15~45A FT/FM 50~100A AT/FM 125~150A AT/AM			AT / AM			AT / AM			AT / AM		
	F = Fixed												
Ambient Temperature		-40 to 70°C											
Mechanical Operating Cycles		10000						8000					
Electrical Operating Cycles		6000						5000					
Accessories		**M1**			**M2**			**M3**			**M4**		
Alarm Switch		■			■			■			■		
Auxiliary Contact													
Shunt Trip													
Under-Voltage Trip													
Connections, Cable Size & Lug Torque													
Connection		■			■			■			■		
Cable Size		1-Hole, #14-3/0 (2.5-95) Cu OR 1-Hole, #12-3/0 (2.5-95) Al			1-Hole, #3-300 kcmil (35-150)			1-Hole, #4/0-600 kcmil (95-240)			2-Holes #2/0-500 kcmil (2x 95-185)		
								2-Holes #3-250 kcmil (35-120)					
Lug Torque		89 (10)			230 (23)			310 (35)			310 (35)		
Weight													
lb (kg)	2P in 3P case	3.17 (1.67)			3.75 (1.70)			8.97 (4.07)			20.94 (9.5)		
	3P	3.68 (1.67)			4.41 (2.00)			13.45 (6.1)			25.35 (11.5)		
Dimensions													
in (mm)		L	W	D	L	W	D	L	W	D	L	W	D
	2P in 3P case	6.46 (164)	3.54 (90)	3.33 (84.5)	7.17 (182)	4.13 (105)	3.47 (88)	11.22 (285)	5.51 (140)	4.49 (116.5)	12.32 (313)	7.68 (195)	5.43 (138)
	3P	6.46 (164)	3.54 (90)	3.33 (84.5)	7.17 (182)	4.13 (105)	3.47 (88)	11.22 (285)	5.51 (140)	4.49 (116.5)	12.32 (313)	7.68 (195)	5.43 (138)

* 2 pole in a 3 pole case ** 600 Vdc only available for 3 pole and 4 pole

MxP UL67 Panelboard Components Kit

Technical Specification - Dimensions

Components dimensions

Breaker Connection Kits Dimensions mm	Chassis	Narrow		Standard			Wide			
	Mount Type	Twin	Single	Twin	Twin	Single	Twin	Twin	Twin	Single
	Breaker Frame	M1	M2	M1	M2	M3	M1	M2	M3	M4
	L	486.8	405.6	570.4	570.4	484.5	570.4	570.4	822.4	598.9
	W	90.0	105.0	90.0	105.0	140.0	237.3	240.3	236.5	229.2
	H	244.83	240.33	237.33	240.33	236.20	90.00	105.00	140.00	195.00

Dead Front Cover Dimensions mm	Chassis	Narrow		Standard			Wide			
	Mount Type	Twin	Single	Twin	Twin	Single	Twin	Twin	Twin	Single
	Breaker Frame	M1	M2	M1	M2	M3	M1	M2	M3	M4
	L	440.74	440.74	440.74	440.74	440.74	650.74	650.74	650.74	650.74
	W	89.5	119.0	89.5	119.0	179.0	89.5	119.0	179.0	208.7
	H	8.00	8.00	8.00	13.00	13.00	8.00	13.00	13.00	13.00

Blank Cover Dimensions mm	Chassis	Narrow				Standard				Wide			
	Circuit Space	1	1.5	2	3	1	1.5	2	3	1	1.5	2	3
	L	440.74	440.74	440.74	440.74	440.74	440.74	440.74	440.74	650.74	650.74	650.74	650.74
	W	29.5	44.5	59.5	89.5	29.5	44.5	59.5	89.5	29.5	44.5	59.5	89.5
	H	8.00	8.00	8.00	8.00	8.00	8.00	8.00	8.00	8.00	8.00	8.00	8.00

Breaker Hole Cover Dimensions mm	Breaker Frame	M1	M2	M3	M4
	L	110.1	124.1	155.0	177.0
	W	43.8	50.3	70.0	92.0
	H	2.00	2.00	2.00	2.00

MCCB Mounting Layout

Chassis	Vertical Busbar Sizes, Inch	Maximum Ampere, A	Maximum Voltage, V	Vertical BusbarMaximum Short Circuit, kA	Feeders/CS	Total Circuit Space (Options)	Minimum Enclosure W x H x D (in)	
MxPL08	(1)x 1/4 X 3	800	600	50	M1 Twin mount = 3CS M2 Single mount = 4CS	21CS	24 x 60 x 12	Narrow chassis
			480	100		36CS		
			240	150		45CS		
MxPL12	(1)x 1/4 X 4	1200	600	50	M1 Twin mount = 3CS M2 Twin mount = 4CS M3 Single mount = 6CS	21CS	28 x 90 x 12	 Standard chassis
			480	100		36CS		
			240	150		45CS		
MxPL20	(2)x 1/4 X 4	2000	600	50	M1 Twin mount = 3CS M2 Twin mount = 4CS M3 Twin mount = 6CS M4 Single mount = 7CS	21CS	38 x 90 x 12	 Wide chassis
			480	100		36CS		
			240	150		45CS		

MxP UL67 Panelboard Components Kit

Application Scenarios

UL891 Switchboard System

UL891 Type 1 / Type 3R switchboard

UL891 switchboard with UL67 chassis

Data center, commercial building, industrial power distribution

UL67 Chassis + UL 50E 3R Enclosure + UL891 Switchboard = UL891 Type 3R Switchboard

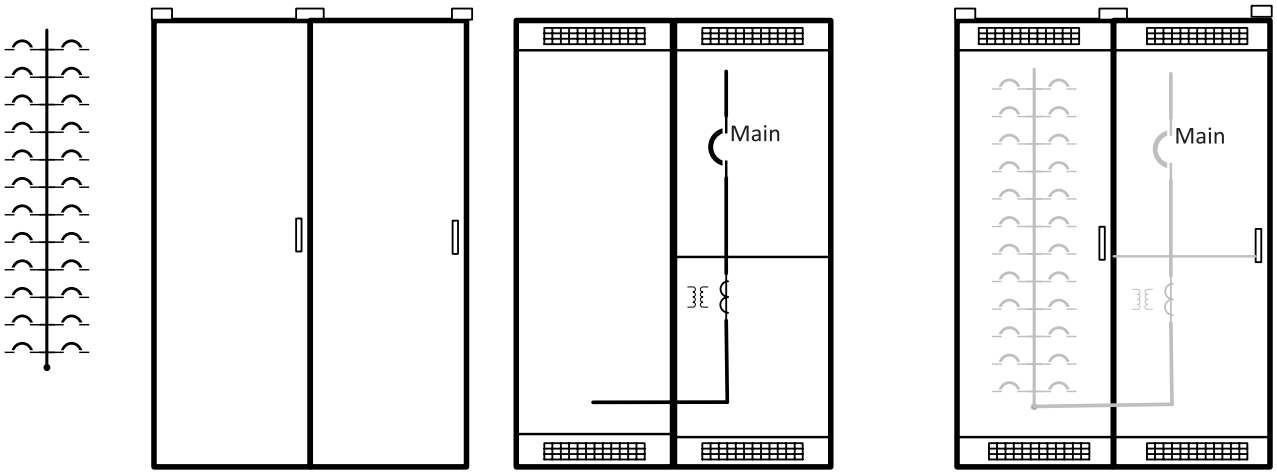

UL67 Chassis + UL 891 Enclosure = Switchboard

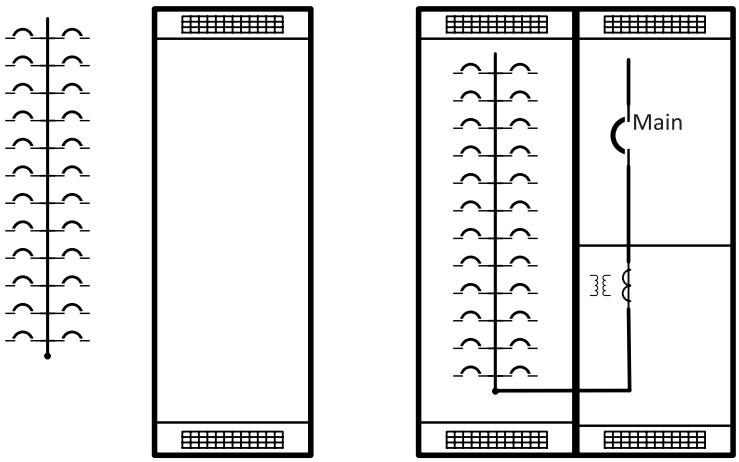

MxP UL67 Panelboard Components Kit

Application Scenarios

UL845 Motor Control Center (MCC)

UL845 MCC interior with UL67 chassis

Industrial motor control & power distribution

UL 845 MCC Enclosure + UL67 Chassis = UL 845 Motor Control Center

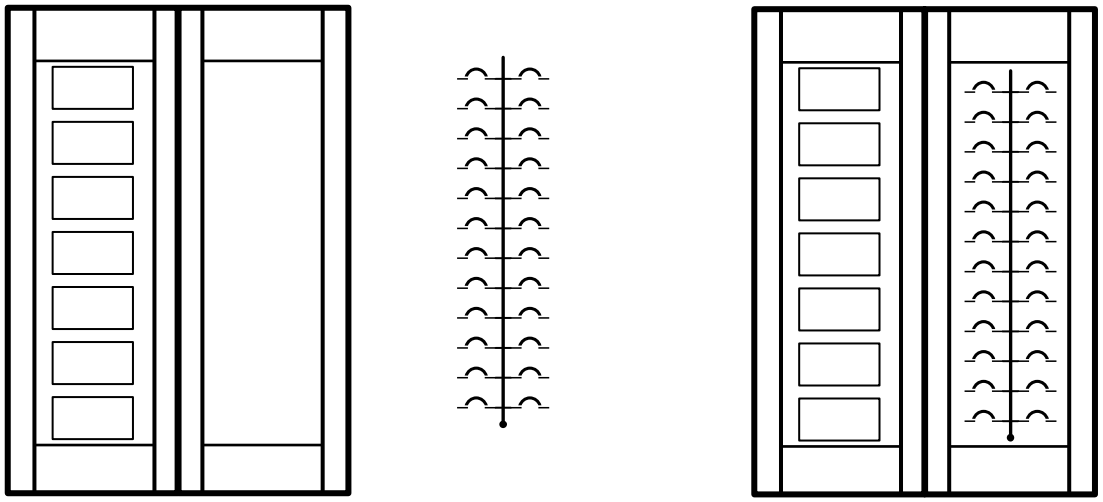

UL67 Panelboard

Standard UL67 panelboard assembly

Fast configuration & mass production for OEM

UL67 Chassis + UL 50E Enclosure = UL67 Panelboard

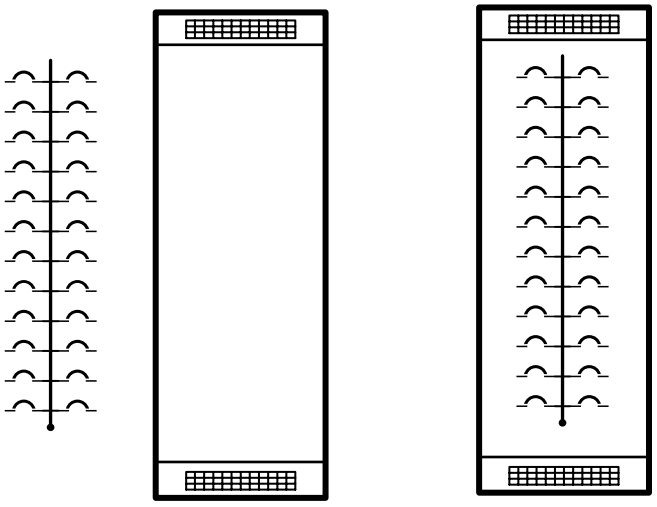

NOARK

NOARK Electric USA
4560 Excel Pkwy, STE 100
Addison, TX 75001
(626) 330-7007
nasales@noark-electric.com

NOARK Electric Canada
975 Bleams Rd. Unit 3
Kitchener, ON N2E 3Z5
519-790-0605
casales@noark-electric.com

na.noark-electric.com

Note: NOARK Electric reserves the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. NOARK Electric nor any of its affiliates or subsidiaries shall be responsible or liable for potential errors or possible lack of information in this document. NOARK Electric reserves all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of NOARK Electric.

2026 NOARK Electric · All Rights Reserved

PCK202610NA