Noark

Essential Components Catalog

Circuit Protection, Motor Controls and Pilot Devices

Branch, Motor Circuit and Supplementary Protection

Molded Case Circuit Breakers	A
Molded Case Switches	B
Motor Circuit Protectors	C
Miniature Circuit Breakers	D

Motor Controllers and Overload Protection

Manual Motor Starters	E
Contactors	F
Overloads	G
Safety Contactors	H
Safety Control Relays	I

Pilot Devices

Indicator Lights	J
Push Buttons	K
Selector Switches	L

Excellent Products. Exceptional Value.

na.noark-electric.com

Company Overview

About us

NOARK Electric is a global manufacturer of low-voltage electrical components for industrial applications. We specialize in motor controls and circuit protection for original equipment manufacturers. Our mission is to provide customers with the highest quality products at an exceptional value and back them with world-class service and support. Every NOARK product is tested and certified to the highest industry standards.

Research and Development
The entire portfolio of high-quality NOARK products is designed for manufacturing and assembly. Each component is developed in-house by our engineering team to meet the strictest standards and performance requirements. This dedication to excellence has led to the development of patented technology found in many of our products.

World-class Manufacturing
After being thoroughly tested, approved and certified – each NOARK product is sent into production at our state-of-the-art manufacturing facilities. This allows us to maintain strict quality control standards throughout the manufacturing process. In addition, NOARK Electric adheres to a policy of environmental protection and sustainability.

North American Distribution
NOARK's primary distribution center is located in Pomona, CA, with the aim of ensuring prompt and reliable deliveries of the entire product range to our customers all over North America. Our supply chain team works closely with our factories and logistics partners to ensure the availability of our products on the North American market and provide logistics services on the level which our customers expect.

NOARK Electric is a wholly subsidiary of the largest electrical manufacturing group in Asia with over 30 thousand employees and sales revenue of $10 billion USD. We have corporate facilities in Los Angeles, Shanghai and Prague to service the requirements of individual markets and countries.

140+	300+	20	22	3	10,000,000+	30,000+
Countries	Overseas Distributors	Overseas Subsidiaries	Logistics Centers	R & D Centers	Sq.Ft. Manufacturing Space	Employees Worldwide

Table of Contents

Branch and Motor Circuit Protection
Molded Case Circuit Breakers (MCCB) - UL 489 Branch Circuits, UL 60947-4-1 Type C 1
Technical Data 5
Molded Case Switches (MCS) - UL 489 Disconnect 7
Technical Data 9
Motor Circuit Protectors (MCP) - UL 60947-4-1 Type D 10
Technical Data 12
Accessories 13

Miniature Circuit Breakers (MCB) - UL 489 Branch Circuits 23
Technical Data 30
Accessories 31
Miniature Circuit Breakers (MCB) - UL 1077 Supplementary Protectors 33
Technical Data 36
Accessories 37

Motor Controllers and Overload Protection
Manual Motor Starters - UL 60947-4-1 (formerly UL 508) Type E and F 39
Technical Data 40
Accessories 43

Contactors - Standard / Heavy-duty 45
Technical Data 54
Overloads 61
Technical Data 63
Accessories 65
Contactors - General Purpose 69
Technical Data 71
Safety Contactors - UL 60947-5-1 Safety function applications 73
Technical Data 75
Safety Control Relays - UL 60947-5-1 Safety function applications 77
Technical Data 79

Pilot Devices
Pilot Devices - UL recognized components, IEC/EN 60947 80
Indicator Lights 81
Pushbuttons 83
Selector Switches 86
Illuminated Pushbuttons 87

Terms and Conditions of Sale 89

Molded Case Circuit Breakers

UL 489 and UL 60947-4-1 (formerly UL 508) Applications

A molded case circuit breaker can be used to provide overload and short circuit protection for cables, control panels, motors and branch circuits. In addition, the National Electrical Code (NEC) requires the following when controlling a motor:

- A means of disconnecting power from the circuit
- Short circuit protection for the cables
- A way to start and stop the motor (typically a contactor)
- Overload protection for the motor (typically an overload relay)

The molded case circuit breaker can provide the means to disconnecting power and provide short circuit protection under UL 60947-4-1 type C protection. The magnetic only Motor Circuit Protector (MCP) can provide the same function under UL 60947-4-1 type D protection.

TYPE C

Components	Catalog Number	Product
Molded Case Circuit Breaker (MCCB)	M1S	
Contactor	EX9C	
Overload Relay	Ex9R	

TYPE D

Components	Catalog Number	Product
Motor Circuit Protector (MCP)	M1M	
Contactor	EX9C	
Overload Relay	Ex9R	

Molded Case Circuit Breakers
Product Overview

Features

Molded Case Circuit Breakers, 15-1200 Amperes

NOARK Electric offers a complete range of Molded Case Circuit Breakers in six frame sizes: M1 - 150A, M2 - 250A, M3 - 400A, M4 - 600A, M5 - 800A, and M6 - 1200A. Each frame size offers a range of interrupting ratings from 240-690 Vac and 250-600 Vdc.

- High-breaking capacity and a patented arc extinguishing design
- Bearing-type spindle reduces the operating force required to open and close the operating mechanism
- High quality compact modular design
- Fixed and adjustable trip unit settings
- Line and load lugs installed standard
- 5-Year limited warranty

Wide range of accessories:

- Alarm switch and auxiliary contact
- Shunt and under-voltage trip
- Rotary type handle
- Flange type handle

Certifications

- UL 489 Listed, File Number E355392
- Certified for Canada CSA standards 22.2 No. 5 under cUL testing
- IEC/EN 60947-2
- CE Compliant

c UL us LISTED

CE

Molded Case Circuit Breakers

Line/Load Lug Connection

- Terminal lugs are provided standard on all NOARK MCCBs.
- Additional terminal lug configurations available. See pages 19-20.

Green Highlight = Most Popular

† For M1-M4 frames using aluminum wire contact NOARK Electric customer service.

For higher ratings at 480 Vac and 600 Vac see H version on website na.noark-electric.com

Ratings • Available interrupting current • Amperes		1-Pole 80% Rated Catalog Number	2-Pole 80% Rated Catalog Number	3-Pole 80% Rated Catalog Number	Lug Configuration
		Line/Load Lug Connection			
M1S (50 kA @ 240 Vac) (35 kA @ 480 Vac) (22 kA @ 600 Vac)	15	-	M1S15T22L	M1S15T3L	1-Hole Cu wire only † #14-3/0 AWG*
	20	-	M1S20T22L	M1S20T3L	
	25	-	M1S25T22L	M1S25T3L	
	30	-	M1S30T22L	M1S30T3L	
	35	-	M1S35T22L	M1S35T3L	
	40	-	M1S40T22L	M1S40T3L	
	45	-	M1S45T22L	M1S45T3L	
	50	-	M1S50T22L	M1S50T3L	
	60	-	M1S60T22L	M1S60T3L	
	70	-	M1S70T22L	M1S70T3L	
	80	-	M1S80T22L	M1S80T3L	
	90	-	M1S90T22L	M1S90T3L	
	100	-	M1S100T22L	M1S100T3L	
	125	-	M1S125T22L	M1S125T3L	
	150	-	M1S150T22L	M1S150T3L	
M1N 2-Pole/3-Pole (100 kA @ 240 Vac) (65 kA @ 480 Vac) (30 kA @ 600 Vac) **M1N** 1-Pole (10 kA @480 Vac)	15	M1N15T1L	M1N15T22L	M1N15T3L	1-Hole Cu wire only † #14-3/0 AWG*
	20	M1N20T1L	M1N20T22L	M1N20T3L	
	25	M1N25T1L	M1N25T22L	M1N25T3L	
	30	M1N30T1L	M1N30T22L	M1N30T3L	
	35	M1N35T1L	M1N35T22L	M1N35T3L	
	40	M1N40T1L	M1N40T22L	M1N40T3L	
	45	M1N45T1L	M1N45T22L	M1N45T3L	
	50	M1N50T1L	M1N50T22L	M1N50T3L	
	60	M1N60T1L	M1N60T22L	M1N60T3L	
	70	M1N70T1L	M1N70T22L	M1N70T3L	
	80	M1N80T1L	M1N80T22L	M1N80T3L	
	90	M1N90T1L	M1N90T22L	M1N90T3L	
	100	M1N100T1L	M1N100T22L	M1N100T3L	
	125	M1N125T1L	M1N125T22L	M1N125T3L	
	150	M1N150T1L	M1N150T22L	M1N150T3L	
M2S (50 kA @ 240 Vac) (35 kA @ 480 Vac) (22 kA @ 600 Vac)	175	-	M2S175T22L	M2S175T3L	1-Hole Cu wire only † #8 AWG*- 350 kcmil
	200	-	M2S200T22L	M2S200T3L	
	225	-	M2S225T22L	M2S225T3L	
	250	-	M2S250T22L	M2S250T3L	
M2N (100 kA @ 240 Vac) (65 kA @ 480 Vac) (30 kA @ 600 Vac)	175	-	M2N175T22L	M2N175T3L	1-Hole Cu wire only † #8 AWG*- 350 kcmil
	200	-	M2N200T22L	M2N200T3L	
	225	-	M2N225T22L	M2N225T3L	
	250	-	M2N250T22L	M2N250T3L	
M3S (65 kA @ 240 Vac) (42 kA @ 480 Vac) (22 kA @ 600 Vac)	300	-	M3S300T2L**	M3S300T3L	1-Hole Cu wire only † 3/0 AWG*- 500 kcmil
	350	-	M3S350T2L**	M3S350T3L	
	400	-	M3S400T2L**	M3S400T3L	
M3N (100 kA @ 240 Vac) (65 kA @ 480 Vac) (30 kA @ 600 Vac)	300	-	M3N300T2L**	M3N300T3L	1-Hole Cu wire only † 3/0 AWG*- 500 kcmil
	350	-	M3N350T2L**	M3N350T3L	
	400	-	M3N400T2L**	M3N400T3L	

** 2-pole in a 3-pole case

* AWG = American Wire Gauge

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Molded Case Circuit Breakers

Line/Load Lug Connection

- Terminal lugs are provided standard on all NOARK MCCBs.
- Additional terminal lug configurations available. See pages 19-20.

Green Highlight = Most Popular

Ratings • Available interrupting current • Amperes		3-Pole 80% Rated Catalog Number Line/Load Lug Connection	Lug Configuration
M4S (65 kA @ 240 Vac) (42 kA @ 480 Vac) (22 kA @ 600 Vac)	500	M4S500T3L	2-Hole Cu wire only † (2) 3/0 AWG*- 400 kcmil
	600	M4S600T3L	
M4N (100 kA @ 240 Vac) (65 kA @ 480 Vac) (30 kA @ 600 Vac)	500	M4N500T3L	2-Hole Cu wire only † (2) 3/0 AWG*- 400 kcmil
	600	M4N600T3L	
M5S (65 kA @ 240 Vac) (42 kA @ 480 Vac) (22 kA @ 600 Vac)	700	M5S700T3L	2-Hole Al/Cu Wire (2) 250kcmil-600 kcmi
	800	M5S800T3L	3-Hole Al/Cu Wire (3) 250kcmil-500 kcmil
M5N (100 kA @ 240 Vac) (65 kA @ 480 Vac) (30 kA @ 600 Vac)	700	M5N700T3L	2-Hole Al/Cu Wire (2) 250kcmil-600 kcmi
	800	M5N800T3L	3-Hole Al/Cu Wire (3) 250kcmil-500 kcmil

For higher ratings at 480 Vac and 600 Vac see H version on website na.noark-electric.com

Ratings • Available interrupting current • Amperes		3-Pole Electronic Trip Unit 80% Rated Catalog Number	100% Rated Catalog Number	Lug Configuration
		Line/Load Lug Connection		
M6S (65 kA @ 240 Vac) (42 kA @ 480 Vac) (22 kA @ 600 Vac)	1000	M6S1000E3L	M6S1000E3LF	3-Hole Al/Cu Wire (3)3/0 AWG*-750kcmil
	1200	M6S1200E3L	M6S1200E3LF	4-Hole Al/Cu Wire (4)3/0 AWG*-500kcmil
M6N (100 kA @ 240 Vac) (65 kA @ 480 Vac) (30 kA @ 600 Vac)	1000	M6N1000E3L	M6N1000E3LF	3-Hole Al/Cu Wire (3)3/0 AWG*-750kcmil
	1200	M6N1200E3L	M6N1200E3LF	4-Hole Al/Cu Wire (4)3/0 AWG*-500kcmil

* AWG = American Wire Gauge

† For M1-M4 frames using aluminum wire contact NOARK Electric customer service.

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

A

Molded Case Circuit Breakers

M1-M6 Technical Data

		M1					M2				M3		M4		M5		M6	
Rated Current (A)		15-150					100-250				225-400		500-600		700-800		1000-1200	
Number of Poles		1	2		3		1	2	3		3		3		3		3	
Breaker Type		N	S	N	S	N	N	S	S	N	S	N	S	N	S	N	S	N
Rated Voltage 50/60 Hz	Vac	480	600		600		480	600	600				600				600	
	Vdc	250	500				250	500									-	
Interrupting Capacity (kA rms)																		
Circuit Breaker Ratings UL 489 CSA C22.2 (kA rms) Vac 50/60 Hz	240 Vac	50	50	100	50	100	50	50	50	100	65	100	65	100	65	100	65	100
	480 Vac	10	35	65	35	65	10	35	35	65	42	65	42	65	42	65	42	65
	600 Vac	-	14	20	14	20	-	14	14	20	18	25	22	30	22	30	22	42
	250 Vdc 1-Pole	25	-				25	-					-					
	500 Vdc 2-Pole	-	20	35	20	35	-	20	20	35	35	50	35	50	35	50	-	
	600 Vdc 3-Pole	-			20	35	-		20	35	35	50	35	50	35	50		
Circuit Breaker Ratings IEC 60947-2 Ultimate Breaking Capacity (Icu = 100% Ics) (kA rms)	220 / 240 Vac	50	50	100	50	100	50	50	50	100	65	100	65	100	65	100	65 (45) Icu/ Ics	85 (45) Icu/ Ics
	380 / 415 Vac	-					-											
	660 / 690 Vac		5	8	5	8		6	6	10	10	15	12	15	12	15	30	30
	250 Vdc 1-Pole	25	-				25	-			-		-		-			
	500 Vdc 2-Pole	-	20	35	20	35	-	20	20	35	35	50	35	50	35	50	-	
	500 Vdc 3-Pole		-		25	35		-	25	35	35	50	35	50	35	50		
Current Rating (A) @ 104 °F (40 °C)		15-150					100-250				225-400		500-600		700-800		1000-1200	
Thermal-Magnetic Trip Units (Fixed)	A = Adjustable T = Thermal F = Fixed M = Magnetic	FT/ FM	15-45 FT/FM 50-150A AT/ FM		15-45A FT/ FM 50-100A AT/ FM 125-150A AT/AM		FT/ FM	AT / AM			AT / AM						Electronic	
Accessories																		
Alarm Switch		-	■		■		-	■			■		■					
Auxiliary Contact																		
Shunt Trip																		
Under-Voltage Trip																		
Handle Lock		■					■											
Flange Type Handle		-					-											
Rotary Type Handle																		
Connection																		
Line/Load Lug Connection		■																

Molded Case Circuit Breakers

M1-M6 Technical Data

		M1	M2	M3	M4	M5	M6
Insulation Voltage (Vi)		800 Vac					
Impulse Withstand Voltage (Vimp)		8 kVac					
Operational Voltage (Ve)	UL	600 Vac					
Utilization Category		A					
Mechanical Operating Cycles		10,000		8,000		3,000	
Electrical Operating Cycles		6,000		5,000		500	
Dimensions L x W x D in	1-Pole	6.46 x 1.4 x 3.33	7.17 x 1.57 x 3.47	-			
	2 Pole	6.46 x 2.44x3.33	7.17 x 2.95 x 3.47				
	3 Pole	6.46 x 3.54 x 3.33	7.17 x 4.13 x 3.47	11.22 x 5.51x4.59	12.32 x 7.68 x 5.43	16.18 x 7.68 x 7.58	22.64 x 9.84 x 15.16
Weight of Unit lb (kg)	1-Pole	1.47 (0.67)	1.76 (0.8)	-			
	2 Pole	2.53 (1.15)	3.3 (1.5)				
	3 Pole	3.68 (1.67)	4.41 (2.00)	13.45 (6.1)	25.35 (11.5)	33.18 (15.05)	55.56 (25.2)
Cable Connection Wire 167 °F (75 °C) Cu Wire Only AWG*		1-Hole #14-3/0	1-Hole #8 - 350 kcmil	1-Hole 3/0 - 500 kcmil	2-Hole (2x) 3/0 - 400 kcmil	700A 2-Hole 250-600kcmil	800-1000A 3-Hole 3/0-750 kcmil
						800A 3-Hole 4/0 AWG-500 kcmil	1200A 4-Hole 3/0-500 kcmil
Lugs in-lb (N.m)		89 (10)	230 (23)	310 (35)		398 (45)	310 (35)

* AWG = American Wire Gauge

A

M1 - M5 Interruption Polarity for DC Application

2 Poles

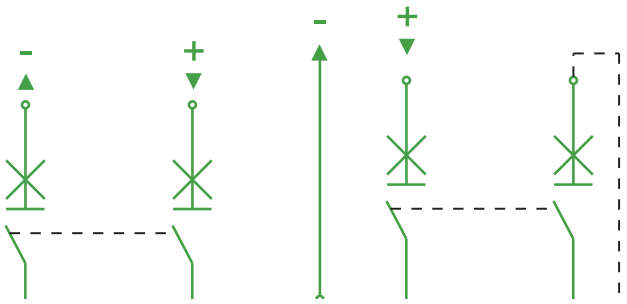

3 Poles

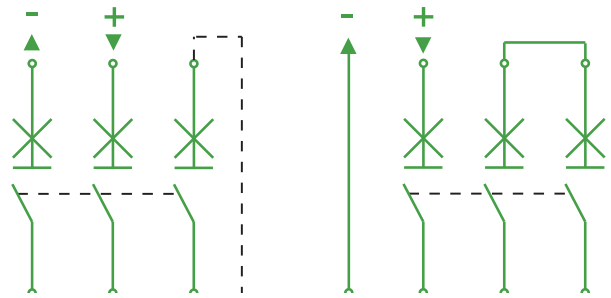

Molded Case Switches
Product Overview

Features

Molded Case Switches, 100-1200 Amperes
NOARK Electric offers a complete range of Molded Case Switches in six frame sizes: M1 - 150A, M2 - 250A, M3 - 400A, M4 - 600A, M5 - 800A, and M6 - 1200A. Each frame size offers a range of interrupting ratings at 240-690 Vac and 250-600 Vdc. Molded Case Switches are only used as disconnect switches.

Features:
- Instantaneous trip ability and a patented arc extinguishing design
- Bearing-type spindle reduces the operating force required to open and close the operating mechanism
- High-quality compact modular design
- 5-Year limited warranty

Wide range of accessories:
- Alarm switch and auxiliary contact
- Shunt and under-voltage trip
- Rotary type handle
- Flange type handle

5 years
LIMITED WARRANTY

Certifications

- UL 489 Listed, File Number E355396
- Certified for Canada CSA standards 22.2 No. 5 under cUL testing
- IEC/EN 60947-2
- CE Compliant

c UL us LISTED

CE

Molded Case Switches

Line/Load Lug Connection

- Terminal lugs are provided standard on all NOARK MCCBs.
- Additional terminal lug configurations available. See pages 19-20.

Green Highlight = Most Popular

Ratings • Available interrupting current • Amperes		2-Pole Catalog Number	3-Pole Catalog Number	Lug Configuration
		Line/Load Lug Connection		
M1D 100 kA @ 240 Vac 65 kA @ 480 Vac 20 kA @ 600 Vac	100	M1D1002L	M1D1003L	1-Hole Cu wire only † #14-3/0 AWG*
	150	M1D1502L	M1D1503L	
M2D 100 kA @ 240 Vac 65 kA @ 480 Vac 20 kA @ 600 Vac	225	M2D2252L	M2D2253L	1-Hole Cu wire only † #8 AWG*- 350 kcmil
	250	M2D2502L	M2D2503L	
M3D 100 kA @ 240 Vac 65 kA @ 480 Vac 25 kA @ 600 Vac	400	-	M3D4003L	1-Hole Cu wire only † 3/0 AWG*- 500 kcmil
M4D 100 kA @ 240 Vac 65 kA @ 480 Vac 30 kA @ 600 Vac	600	-	M4D6003L	2-Hole Cu wire only † (2) 3/0 AWG*- 400 kcmil
M5D 100 kA @ 240 Vac 65 kA @ 480 Vac 30 kA @ 600 Vac	800	-	M5D8003L	3-Hole Al/Cu Wire (3) 250kcmil-500kcmil
M6D 100 kA @ 240 Vac 65 kA @ 480 Vac 42 kA @ 600 Vac	1000	-	M6D10003LF	3-Hole Al/Cu Wire (3) 3/0 AWG*-750kcmil
	1200	-	M6D12003LF	4-Hole Al/Cu Wire (4) 3/0 AWG*-500kcmil

† For M1-M4 frames using aluminum wire contact NOARK Electric customer service.

* AWG = American Wire Gauge

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Molded Case Switches
M1D - M6D Technical Data

		M1D	M2D	M3D	M4D	M5D	M6D
Rated Current (A)		100 - 150	225 - 250	400	600	800	1000 -1200
Number of Poles		2, 3		3			
Switch Type		M1D	M2D	M3D	M4D	M5D	M6D
Rated Voltage 50/60 Hz	Vac	600					
	Vdc	600					-
Withstand Rating* (kA rms)							
Circuit Breaker Ratings UL 489- -C-SA C22.2 (kA rms) Vac 50/60 Hz	240 Vac	100	100	100	100	100	100
	480 Vac	65	65	65	65	65	65
	600 Vac	20	20	25	30	30	42
	500 Vdc 2-Pole	35	35	50	50	50	-
	600 Vdc 3-Pole	35	35	50	50	50	-
Circuit Breaker Ratings IEC 60947-2	220 / 240 Vac	100	100	100	100	100	85 (60) Icu/Ics
	380 / 415 Vac						
Ultimate Breaking Capacity (Icu = 100% Ics) (kA rms)	660 / 690 Vac	8	10	15	15	15	30
	500 Vdc 3-Pole	35	35	50	50	-	-
	500 Vdc 2-Pole	35	35	50	50	50	-
Trip Current (A)		15xIn	12xIn	12xIn	10xIn	10xIn	15xIn
Connection							
Line/Load Lug Connection		■					
Insulation Voltage (Vi)		800 Vac					
Impulse Withstand Voltage (Vimp)		8 kVac					
Operational Voltage (Ve)	UL	600 Vac					
Mechanical Operating Cycles		10,000		8,000		3,000	
Electrical Operating Cycles		6,000		5,000		500	
Dimensions LxWxD in		6.46 x 3.54 x 3.33	7.17 x 4.13 x 3.47	11.22 x 5.51 x 4.59	12.32 x 7.68 x 5.43	16.18 x 7.68 x 7.58	22.64 x 9.84 x 15.16
Weight of Unit lb	2-Pole	3.17	3.75	-	-	-	-
	3-Pole	3.68	4.41	13.45	25.35	33.18	55.56
Lugs lb-in (N.m)		89 (10)	230 (23)	310 (35)		398 (45)	310 (35)

*NOTE: When protected by an upstream circuit breaker or fuse, the molded case switch would have a withstand rating.

Molded Case Motor Circuit Protectors
Product Overview

Features

Molded Case Motor Circuit Protectors, 3-1200 Amperes
NOARK Electric offers a complete range of 3 pole Molded Case Motor Circuit Protectors (MCPs, magnetic or short circuit protection only) which are used to protect the cables feeding three phase motors in six frame sizes: M1M - 150A, M2M - 250A, M3M - 400A, M4M - 600A, M5M - 800A, and M6M - 1200A. Each frame size offers a range of interrupting ratings at 240-690 Vac and 250-600 Vdc.

The National Electrical Code (NEC) requires the following when controlling a motor:

- A means of disconnecting power from the circuit
- Short circuit protection for the cables
- A way to start and stop the motor (typically a contactor)
- Overload protection for the motor (typically an overload relay)

A motor circuit protector serves as means of disconnecting power and short circuit protection for the cables.

5 years LIMITED WARRANTY

C

Certifications

- UL 489 Recognized, File Number E355392
- Certified for Canada CSA standards 22.2 No. 5 under cUL testing
- IEC/EN 60947-2
- CE Compliant

Molded Case Motor Circuit Protectors

Line/Load Lug Connection

- Terminal lugs are provided standard on all NOARK MCCBs.
- Additional terminal lug configurations available. See pages 19-20.

Green Highlight = Most Popular

Rated Amperage (A)	Magnetic Trip Setting Range	S Interrupting		N Interrupting	Lug Configuration
		50kA @ 240 Vac 35kA @ 480 Vac 14kA @ 600 Vac	65kA @ 240 Vac 42kA @ 480 Vac 18kA @ 600 Vac	100kA @ 240 Vac 65kA @ 480 Vac 20kA @ 600 Vac	
		Catalog Number	Catalog Number	Catalog Number	
		Line/Load Lug Connection			
3	7x-11x	M1MS03T3L	-	M1MN03T3L	1-Hole Cu wire only † #14-3/0 AWG*
7	5x-10x	M1MS07T3L	-	M1MN07T3L	
15	5x-10x	M1MS15T3L	-	M1MN15T3L	
30	5x-11x	M1MS30T3L	-	M1MN30T3L	
50	5x-11x	M1MS50T3L	-	M1MN50T3L	
70	5x-11x	M1MS70T3L	-	M1MN70T3L	
100	5x-11x	M1MS100T3L	-	M1MN100T3L	
150	5x-11x	M1MS150T3L	-	M1MN150T3L	
250	5x-11x	M2MS250T3L	-	M2MN250T3L	1-Hole Cu wire only † #8 AWG*- 350 kcmil
400	5x-11x	-	M3MS400T3L	M3MN400T3L	1-Hole Cu wire only † 3/0 AWG*- 500 kcmil
600	5x-11x	-	M4MS600T3L	M4MN600T3L	2-Hole Cu wire only † (2) 3/0 AWG*- 400 kcmil
800	5x-11x	-	M5MS800T3L	M5MN800T3L	3-Hole Al/Cu Wire Only (3) 250kcmil-500kcmil
1200	2x-12x	-	M6MS1200E3LF	M6MN1200E3LF	4-Hole Al/Cu Wire (4) 3/0 AWG* -500kcmil

†For M1-M4 frames using aluminum wire contact NOARK Electric customer service.

* AWG = American Wire Gauge

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Molded Case Motor Circuit Protectors

M1M - M6M Technical Data

		M1M		M2M		M3M		M4M		M5M		M6M	
Current Range (A)		3-150		250		400		600		800		1200	
Number of Poles		3											
Breaker Type		S	N	S	N	S	N	S	N	S	N	S	N
Rated Voltage 50/60 Hz Vac		600											
Interrupting Capacity (kA rms)													
Circuit Breaker Ratings	240 Vac	50	100	50	100	65	100	65	100	65	100	65	100
	480 Vac	35	65	35	65	42	65	42	65	42	65	42	65
	600 Vac	14	20	14	20	18	25	22	30	22	30	22	42
Accessories													
Alarm Switch													
Auxiliary Contact													
Shunt Trip													
Under-Voltage Trip						■				■			
Handle Lock													
Flange Type Handle													
Rotary Type Handle													
Connection													
Line/Load Lug Connection		■											

C

Accessories For MCCB/MCP/MCS

Internal Accessories

Alarm Switch (AL)



Function:

- Sends a signal when the circuit breaker trips
- UL File Number E355392

1

Accessory Description	Rated Operational Voltage	Rated Operational Current	Catalog Number
Alarm Switch 1NO / 1NC	240/480 Vac, 110/220 Vdc	.25A @ 110V .25A @ 220V 5A @ 240V 2A @ 480V	AL21N

Auxiliary Contact (AX)



Function:

- Indicates the state of a circuit breaker (on/off)
- UL File Number E355392

2

Accessory Description	Rated Operational Voltage	Rated Operational Current	Catalog Number
Auxiliary Contact 1NO / 1NC	240/480 Vac, 110/220 Vdc	.25A @ 110V .25A @ 220V 5A @ 240V 2A @ 480V	AX21N

Shunt Release (SHT)



Function:

- Allows circuit breaker to be remotely operated
- Response Voltage, Pick-Up: Us 70-110%
- Opening Time: Interrupts Automatically ≥10 ms, ≤60 ms
- UL File Number E355392

3

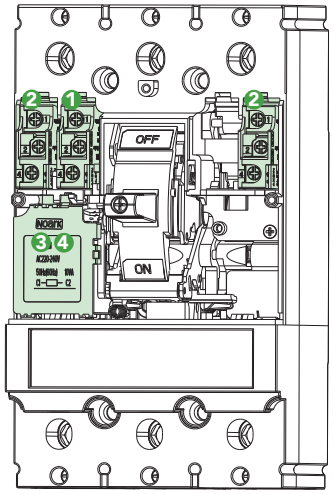

Accessory Description	Frame Size	Voltage	Catalog Number
Shunt Trip	M1	100-130 Vac	SHT21NA
		220-240 Vac	SHT21NB
		480-500 Vac	SHT21ND
		24 Vdc	SHT21NE
	M2-M3	100-130 Vac	SHT22NA
		220-240 Vac	SHT22NB
		480-500 Vac	SHT22ND
		24 Vdc	SHT22NE
	M4-M5	100-130 Vac	SHT24NA
		220-240 Vac	SHT24NB
		480-500 Vac	SHT24ND
		24 Vdc	SHT24NE
	M6	220-240Vac	SHT26NB
		480-500Vac	SHT26ND
		24-30Vdc	SHT26NE

Under-Voltage Trip (UVT)



Function:

- Prevents circuit breaker from closing during an under-voltage situation
- Response Voltage, Drop: Ue 35-70%
- Response Voltage, Pick-Up: Ue 85-110%
- Opening Time: Interrupts Automatically ≥10 ms, ≤60 ms
- UL File Number E355392

4

Accessory Description	Frame Size	Voltage	Catalog Number
Under-Voltage Trip	M1	110-127 Vac	UVT21NA
		220-240 Vac	UVT21NB
		24-30 Vdc	UVT21ND
	M2-M3	110-127 Vac	UVT22NA
		220-240 Vac	UVT22NB
		24-30 Vdc	UVT22ND
	M4-M5	110-127 Vac	UVT24NA
		220-240 Vac	UVT24NB
		24-30 Vdc	UVT24ND
	M6	110-127 Vac	UVT26NA
		220-240 Vac	UVT26NB
		480-500 Vac	UVT26NC1

Green Highlight = Most Popular

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Accessories For MCCB/MCP/MCS

External Accessories: NEW Extended Rotary Handle

Shown: NEH2R2 handle with ES32A extended handle shaft and HM1A operating mechanism.

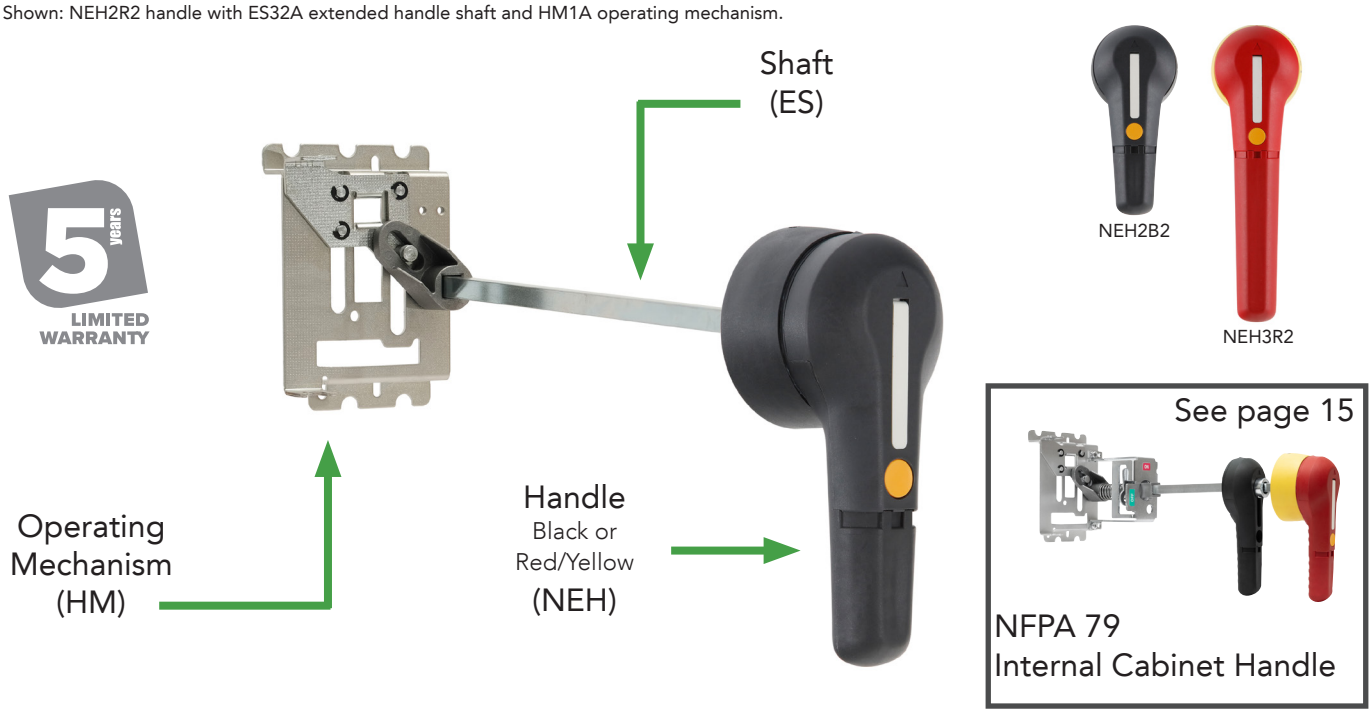

NEMA extended rotary handle mechanism selection consists of 3 components (sold separately): operating mechanism (HM), shaft (ES), and rotary handle (NEH).

- UL File Numbers E484125 and E355392

Selection Process

Step 1. Identify breaker frame size to select corresponding operating mechanism (HM).
Step 2. Select shaft (ES) based on the length needed and diameter required.
Step 3. Select handle (NEH) with the matching shaft diameter based on desired color combination and UL rating.

Step 1

Operating Mechanism		
Select One		
Frame Size	Use Shaft Diameter	Catalog Number
M1	10mm²	HM1A
M2	10mm²	HM2A
M3	12mm²	HM3B
M4 / M5	12mm²	HM4B

+

Step 2

Shaft		
Select One		
Shaft Diameter	Length	Catalog Number
10mm² M1 or M2	7.9 inch (200mm)	ES20A
	12.6 inch (320mm)	ES32A
	19.7 inch (500mm)	ES50A
12mm² M3, M4 or M5	7.9 inch (200mm)	ES20B
	12.6 inch (320mm)	ES32B
	19.7 inch (500mm)	ES50B

+

Step 3

4/4X Handle			
Select One			
Frame Size	Use Shaft Diameter	Color	Catalog Number
M1 or M2	10mm²	Black	NEH2B2
		Red / Yellow	NEH2R2
M3,M4 or M5	12mm²	Black	NEH3B2
		Red / Yellow	NEH3R2

Accessories For MCCB/MCP/MCS

External Accessories: NFPA 79 Internal Cabinet Handle

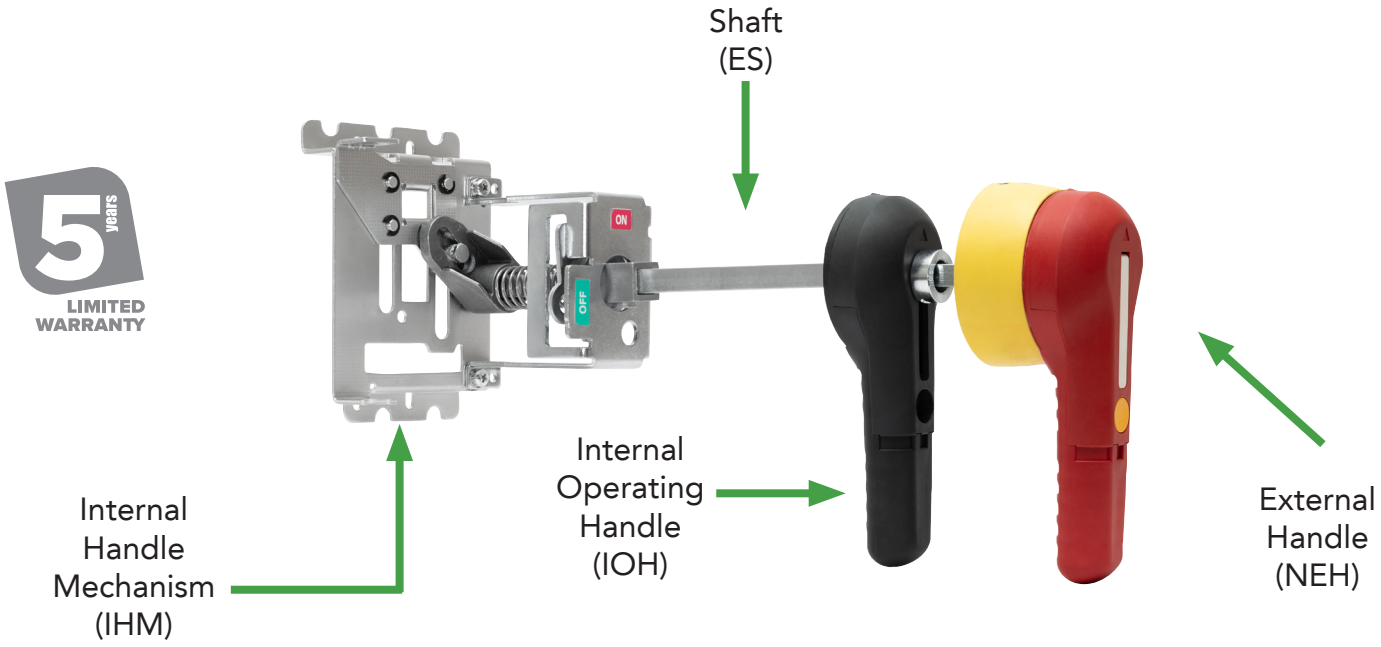

- UL File Numbers E484125 and E355392

Selection Process

Step 1. Identify breaker frame size to select corresponding internal handle mechanism (IHM).
Step 2. Select shaft (ES) based on the length needed and diameter required.
Step 3. Select the internal operating handle (IOH) based on the breaker frame size.
Step 4. Select handle (NEH) with the matching shaft diameter based on desired color combination and UL rating.

Step 1

Internal Handle Mechanism		
Select One		
Frame Size	Use Shaft Diameter	Catalog Number
M1	10mm²	IHM1
M2	10mm²	IHM2
M3	12mm²	IHM3
M4 or M5	12mm²	IHM4

+

Step 2

Shaft		
Select One		
Shaft Diameter	Length	Catalog Number
10mm² M1 or M2	7.9 inch (200mm)	ES20A
	12.6 inch (320mm)	ES32A
	19.7 inch (500mm)	ES50A
12mm² M3, M4 or M5	7.9 inch (200mm)	ES20B
	12.6 inch (320mm)	ES32B
	19.7 inch (500mm)	ES50B

+

Step 3

Internal Operating Handle		
Select One		
Frame Size	Use Shaft Diameter	Catalog Number
M1 or M2	10mm²	IOH2
M3, M4 or M5	12mm²	IOH3

+

Step 4

4/4X Handle			
Select One			
Frame Size	Use Shaft Diameter	Color	Catalog Number
M1 or M2	10mm²	Black	NEH2B2
		Red / Yellow	NEH2R2
M3, M4 or M5	12mm²	Black	NEH3B2
		Red / Yellow	NEH3R2

Accessories For MCCB/MCP/MCS

External Accessories: Standard Extended Rotary Handle

Green Highlight = Most Popular

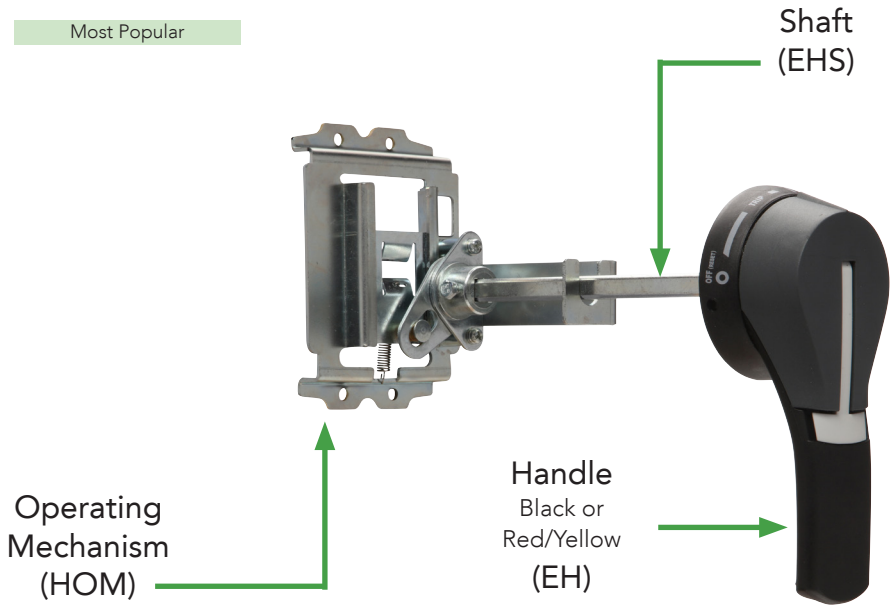

NEMA extended rotary handle mechanism selection consists of 3 components (sold separately): operating mechanism (HOM), shaft (EHS), and rotary handle (EH).

- UL File Number E355392

Selection Process

Step 1. Identify breaker frame size to select corresponding operating mechanism (HOM).
Step 2. Select shaft (ES) based on the length needed and diameter required.
Step 3. Select handle (EH) with the matching shaft diameter based on desired color combination and UL rating.

Step 1

Operating Mechanism		
Select One		
Frame Size	Use Shaft Diameter	Catalog Number
M1	10mm^2	HOM1A
M2	10mm^2	HOM2A
M3	10mm^2	HOM3A
M3 (Alt)	12mm^2	HOM3B
M4 or M5	12mm^2	HOM4B
M6	12mm^2	HOM6B

+

Step 2

Shaft		
Select One		
Shaft Diameter	Length	Catalog Number
10mm^2	7.9 inch (200mm)	EHS20A
	12.6 inch (320mm)	EHS32A
	19.7inch (500mm)	EHS50A
12mm^2	7.9 inch (200mm)	EHS20B
	12.6 inch (320mm)	EHS32B
	19.7inch (500mm)	EHS50B

+

Step 3

Handle			
Select One			
Frame Size	Color	UL Rating	Catalog Number
M1, M2 or M3	Black	1, 3R, 12 4, 4X	EH2B1
			EH2B2
	Red / Yellow	1, 3R, 12 4, 4X	EH2R1
			EH2R2
M3 (Alt), M4, M5 or M6	Black	1, 3R, 12 4, 4X	EH3B1
			EH3B2
	Red / Yellow	1, 3R, 12 4, 4X	EH3R1
			EH3R2

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Accessories For MCCB/MCP/MCS

External Accessories: M1-M5 Flange Handle Mechanism

Green Highlight = Most Popular

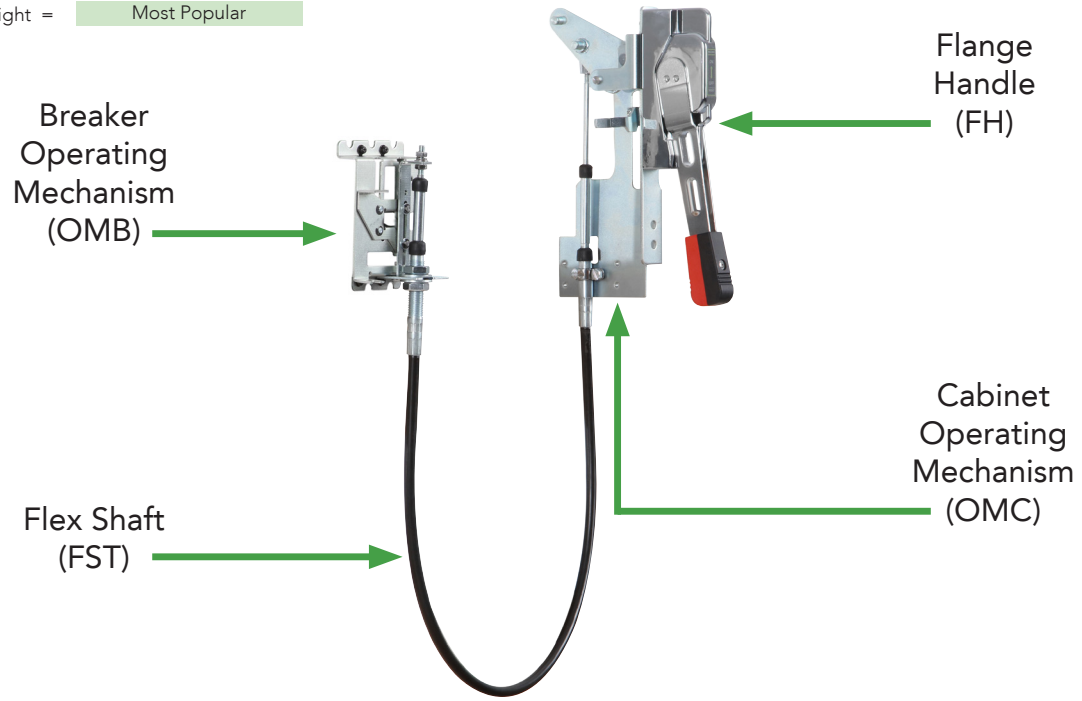

M1-M5 Flange handle mechanism selection is separated into 4 components (sold separately): flange handle (FH), flex shaft (FST), cabinet operating mechanism (OMC) and breaker operating mechanism (OMB). NOARK UL MCCB frame size: M1 (15-150A), M2 (175-250A), M3 (300-400A), M4 (500-600A), M5 (700-800A).

Selection Process

- UL File Numbers E355392, E484125

Step 1. Select desired flange handle.
Step 2. Select cabinet operating mechanism.
Step 3. Select breaker operating mechanism based on frame size.
Step 4. Select flex shaft* based on enclosure requirements.

Step 1

Flange Handle		
Select One		
Frame Size	Handle Type / Length	Catalog Number
M1 / M2 / M3 / M4 / M5	Compact fixed length (9.57 in) UL 4, 4X Rated	FH4XC
	Adjustable length (11.81 - 13.62 in) UL 4, 4X Rated	FH4XD

+

Step 2

Cabinet Operating Mechanism	
Select One	
Frame Size	Catalog Number
M1 / M2 / M3 / M4 / M5	OMC

+

Step 3

Breaker Operating Mechanism	
Select One	
Frame Size	Catalog Number
M1	OMB21
M2	OMB22
M3	OMB23
M4 / M5	OMB24

+

Step 4

Flex Shaft*	
Select One	
Length	Catalog Number
3 feet	FST3
4 feet	FST4
5 feet	FST5
6 feet	FST6

Note: Flange handle mechanism available for M6 frame size on next page.

* When selecting the length of shaft, ensure minimum bending radius of 6 inches is maintained to operate properly. Contact NOARK if additional lengths are needed.

Accessories For MCCB/MCP/MCS

External Accessories: M6 Flange Handle Mechanism

Green Highlight = Most Popular

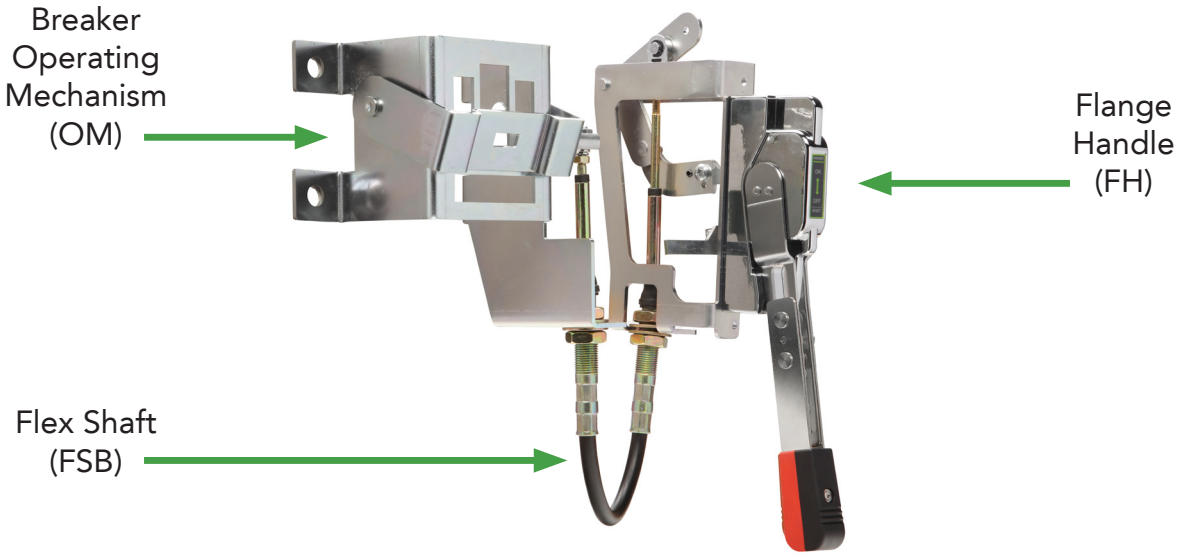

Flange handle mechanism selection is separated into three components (sold separately): flange handle (FH), flex shaft (FSB), and breaker operating mechanism (OM). NOARK UL MCCB frame size: M6 (800-1200A).

Selection Process

- UL File Numbers E355392, E484125

Step 1. Select desired flange handle.
Step 2. Select breaker operating mechanism based on frame size.
Step 3. Select flex shaft* based on enclosure requirements.

Step 1

Flange Handle		
Frame Size	Handle Type / Length	Catalog Number
M6	Adjustable length (11.81 - 13.62 in) UL 4, 4X Rated Single	FH4XA

Step 2

Breaker Operating Mechanism	
Frame Size	Catalog Number
M6	OM26

Step 3

Flex Shaft*	
Select One	
Length	Catalog Number
3 feet	FSB3
4 feet	FSB4
5 feet	FSB5
6 feet	FSB6

*When selecting the length of shaft, ensure minimum bending radius of 6 inches is maintained to operate properly. Contact NOARK if additional lengths are needed.

Accessories For MCCB/MCP/MCS

Connection Hardware: Terminal Lugs

1-Hole

- Terminal lugs included with molded case circuit breakers standard. Listed individually for replacement purposes only.
- Sold Individually Example: Line / Load Terminal Lugs for 3-pole breaker requires six
- UL File Number E349009

† New catalog number is being phased in to provide Al/Cu capabilities for M1-M4 frames. Call NOARK customer service for availability.

Accessory Description	Frame Size	Configuration	Existing Specifications	Existing Catalog Number	New Specifications	New Catalog Number
Terminal Lugs	M1 (150A)	1-Hole Standard	167 °F (75 °C) Cu wire only † #14-3/0 AWG*	LTC21NA	90°C , #14 AWG~3/0 AWG, 1 CU wire, #12 AWG~3/0 AWG, 1 AL wire	LTC21NAA
	M2 (250A)	1-Hole Standard	167 °F (75 °C) Cu wire only † #8 AWG*- 350 kcmil	LTC22NA	90°C , #3AWG~300kcmil, 1 CU/AL wire	LTC22NAA
	M3 (400A)	1-Hole Standard	167 °F (75 °C) Cu wire only † 3/0 AWG*- 500 kcmil	LTC23NA	90°C , 4/0 AWG -750 kcmil, 1 CU/AL wire	LTC23NAA
		2-Hole** Optional	167 °F (75 °C) Cu wire only † #3 AWG*- 250 kcmil	LTC23NB	90°C , 3AWG~250 kcmil, 2 CU/AL wire	LTC23NBA
	M4 (600A)	2-Hole Standard	167 °F (75 °C) Cu wire only † (2) 3/0 AWG*- 400 kcmil	LTC24NB	90°C , 2/0AWG~500 kcmil, 2 CU/AL wire	LTC24NBA
	M5 (800A)	2-Hole (700A) Standard	75°C/90°C Al/Cu Wire (2) 250kcmil-600kcmil	LTC25NB	same as existing specification.	LTC25NBA
		3-Hole (800A) Standard	75°C/90°C Al/Cu Wire (3) 250kcmil-500kcmil	LTC25NC	same as existing specification.	LTC25NCA
	M6 (1200A)	3- Hole (800-1000A) Standard	75°C/90°C Al/Cu Wire (3) 3/0 AWG*-750kcmil	LTC26NC	same as existing specification.	LTC26NCA
		4-Hole (1200A) Standard	75°C/90°C Al/Cu Wire (4) 3/0 AWG*-500kcmil	LTC25ND	same as existing specification.	LTC25NDA

** Requires external terminal cover part no. TC23NB ordered separately

* AWG = American Wire Gauge

Accessory Description	Type	Configuration	Catalog Number
Terminal Cover	M3	2-Holes	TC23NB

- Required for installation of M3 2-Hole terminal LTC23NB or LTC23NBA

Green Highlight = Most Popular

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Accessories For MCCB/MCP/MCS

Connection Hardware: Multi-wire Terminal Lug Kits

- Multi-wire terminal lug kits include: three terminal lugs and one terminal shield.
- Al/Cu rated
- UL File Number E355392

Green Highlight = Most Popular

Accessory Description	Frame Size	Configuration	Specifications	Catalog Number
Multi-wire Terminal Lug Kits	M1 (150A)	3-Hole	167 °F (75 °C) #12 AWG*~#3 AWG* Al wire or #14 AWG*~#3 AWG* Cu wire	LK21NCA
		6-Hole	167 °F (75 °C) #12 AWG*~#6 AWG* Al wire or #14 AWG*~#6 AWG* Cu	LK21NFA
	M2 (250A)	3-Hole	167 °F (75 °C) #8 AWG*~#2/0 AWG* Al/Cu wire	LK22NCA
		3-Hole (one large, two small)	167 °F (75 °C) #3 AWG*~#2/0 AWG*, (1) Al/Cu wire and # 12 AWG*~#1 AWG*, (2) Al/Cu wire	LK22NGA
		6-Hole	167 °F (75 °C) #12 AWG*~#6 AWG Al/Cu wire	LK22NFA
	M3 (400A)	2-Hole	167 °F (75 °C) #3AWG*~250 kcmil Al/Cu wire	LK23NBA
		3-Hole	167 °F (75 °C) #3AWG*~250 kcmil Al/Cu wire	LK23NCA
		5-Hole (two large, three small)	167 °F (75 °C) #12 AWG*~#1 AWG*, (3) Al/Cu wire and #3 AWG*~#3/0 AWG*, (2) Al/Cu wire	LK23NEA
		6-Hole	167 °F (75 °C) 12 AWG*~#3 AWG* Al/Cu wire	LK23NFA
	M4 (600A)	3- Hole	167 °F (75 °C) #2/0 AWG*~250 kcmil Al/Cu wire	LK24NCA
		5-Hole	167 °F (75 °C) #12 AWG*~#1 AWG*, (3) Al/Cu wire and #3 AWG*~#3/0 AWG*, (2) Al/Cu wire	LK24NEA

* AWG = American Wire Gauge

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Miniature Circuit Breakers

Understanding UL 489 & UL 1077 Devices

The key to understanding UL 1077 supplementary protection and UL 489 branch protection requirements is to first understand how to identify the products, the applications they can be used for and importance of selecting the correct device in compliance with UL standards and NEC Codes.

- A UL 489 device can be used as branch circuit protection or supplementary protection.
- UL 1077 devices are only acceptable for providing supplementary protection where there is branch circuit protection ahead of it.

UL 489 Circuit Breakers and Branch Circuit Overcurrent Devices

National Electrical Code (NEC) defines a branch circuit as the circuit conductors between the final overcurrent device protecting the circuit and the outlets. UL 489 opens automatically on overload and short circuit. It also protects wire and cable against overload and short circuit. UL 489 circuit breaker used for branch circuit protection.

UL 489 products have larger dimensions to provide the necessary phase to phase voltage air gap.

UL 489 Applications:

- Receptacles and branch lighting
- Control Panels
- Load circuits leaving the equipment (external)
- Uninterruptible power supply (UPS)
- Relays
- Heating, ventilation, air conditioning and refrigeration equipment (HVAC/R)
- Variable frequency drives (VFD)

Features:

- DIN rail mountable
- Stand alone Branch Circuit Protection
- External handle mechanisms available
- Field mounted accessories
- Various levels of protection (curves)

UL 1077 Supplementary Protectors & Overcurrent Devices

UL 1077 Supplementary Protector is a manually re-settable device designed to open the circuit automatically on a predetermined value of time versus current or voltage within an appliance or other electrical equipment. A supplementary protective device is intended to provide limited overcurrent protection for specific applications and utilization equipment such as cabinet lighting and appliances.

Example: only use UL 1077 to protect circuits inside the equipment that do not feed circuits that exit the equipment.

UL 1077 Applications:

- Cabinet Lighting
- Appliances
- Control Power Transformers
- Relays
- Control Circuits

Features:

- DIN rail mountable
- Field mounted accessories
- Various levels of protection (curves)

Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.

*NEC-National Electrical Code
** CEC-Canadian Electrical Code

Miniature Circuit Breakers

Applying UL 489 Breakers Based on Common System Voltages

Voltage
120/240V 1 Phase



Connection		Style	Rating
Poles	Voltage		
One	120V	B1N or B1NQ	120/240V
Two	240V	B1N or B1NQ	120/240V

Voltage
208/120 3 Phase



Connection		Style	Rating
Poles	Voltage		
One	120V	B1N or B1NQ	120/240V
Two	208V	B1N or B1NQ	120/240V
Three	208V	B1N	240V

Voltage
240V Delta Ungrounded



Connection		Style	Rating
Poles	Voltage		
Two	240V	B1N	240V
Three	240V	B1N	240V

Note: For high-leg delta or 480V delta systems, please call your NOARK representative.

Voltage
3 Phase 480/277V



Connection		Style	Rating
Poles	Voltage		
One	277V	B1H	480/277V
Two	480V	B1H	480/277V
Three	480/277V	B1H	480/277V

Note: One can always use a higher rated breaker. (ie. B1NQ<B1N<B1H)

Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.

*NEC-National Electrical Code
** CEC-Canadian Electrical Code

Miniature Circuit Breakers

Curves

Miniature circuit breakers have different protection curves to accommodate different applications.

C Curve

In Type C curve applications, the magnetic trip is set between 5-10 times the full load current. This is the most common protection used for cables, lighting, resistive loads, general purpose applications and when properly sized, for motors.

C Curve
(5-10 In)



D Curve

Type D curve applications have a higher setting of 7-15 times the full load current due to the inrush current of motor loads and the magnetizing current on the primary of a transformer or solenoid. Application for this curve include motor loads, transformer primary and solenoids due to the inrush or magnetizing currents.



D Curve
(10-20 In)



B Curve

Type B curves provide a magnetic trip setting of 3-5 times the full load current. Applications: electronic circuits.



B Curve
(3-5 In)



Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.

*NEC-National Electrical Code
** CEC-Canadian Electrical Code

Miniature Circuit Breakers
UL 489 Product Overview

Features

The B1 UL 489 miniature circuit breakers are available in a complete range of amperages from 0.5A to 63A. Standard ratings of 10 kA at 480Y/277 Vac and 10 kA at 125 Vdc. These are suitable for branch circuit protection.

- Breakers mount on standard 35 mm DIN rail
- Can be used in UL 1077 or CSA C22.2 No.235 applications
- Field installable shunt trip and auxiliary switch
- Available with provisions for ring tongue terminals
- Module width of only 0.71 in (18 mm) per pole
- Contact position indicator (red/green)
- Provision for pad locking the toggle in ON or OFF position

5 years
LIMITED WARRANTY

D

Typical Applications

- Branch Circuit Protection Receptacle and lighting circuits
- Motor control circuits
- Load circuits leaving the equipment (external)
- Heating, ventilation, air conditioning, refrigeration equipment
- Power supplies
- Control instrumentation
- Relays
- Uninterruptible power supply (UPS)
- Power conditioners

Certifications

UL 489 File Number E355392 / CSA C22.2 No. 5-16 / IEC 60947-2

- Certified for Canada CSA standards 22.2 No. 5 for branch circuit protection.
- UL 489 file number E355392 standard for connection terminals which allows the user to apply field wiring directly to the breaker.
- UL 486 standard for connection terminals which allows the user to apply field wiring directly to the breaker.
- IEC 60947-2 standard for industrial applications of circuit protection.
- CCC China Compulsory Certification

c UL us LISTED

Miniature Circuit Breakers

B1N UL 489 240 Vac; 60/125 Vdc 10 kA - Box Lugs

Certifications

IEC/EN 60947-2

Green Highlight = Most Popular

Rated Amperage (A)	C Curve (5-10 In) Standard		D Curve (10-20 In) Inductive		B Curve (3-5 In) Electronic	
	1-Pole - 240 Vac / 60 Vdc	2-Pole - 240 Vac / 125 Vdc	1-Pole - 240 Vac / 60 Vdc	2-Pole - 240 Vac / 125 Vdc	1-Pole - 240 Vac / 60 Vdc	2-Pole - 240 Vac / 125 Vdc
	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number
0.5	B1N1C0.5	B1N2C0.5	B1N1D0.5	B1N2D0.5	B1N1B0.5	B1N2B0.5
1	B1N1C1	B1N2C1	B1N1D1	B1N2D1	B1N1B1	B1N2B1
1.6	B1N1C1.6	B1N2C1.6	B1N1D1.6	B1N2D1.6	B1N1B1.6	B1N2B1.6
2	B1N1C2	B1N2C2	B1N1D2	B1N2D2	B1N1B2	B1N2B2
3	B1N1C3	B1N2C3	B1N1D3	B1N2D3	B1N1B3	B1N2B3
4	B1N1C4	B1N2C4	B1N1D4	B1N2D4	B1N1B4	B1N2B4
5	B1N1C5	B1N2C5	B1N1D5	B1N2D5	B1N1B5	B1N2B5
6	B1N1C6	B1N2C6	B1N1D6	B1N2D6	B1N1B6	B1N2B6
7	B1N1C7	B1N2C7	B1N1D7	B1N2D7	B1N1B7	B1N2B7
8	B1N1C8	B1N2C8	B1N1D8	B1N2D8	B1N1B8	B1N2B8
10	B1N1C10	B1N2C10	B1N1D10	B1N2D10	B1N1B10	B1N2B10
13	B1N1C13	B1N2C13	B1N1D13	B1N2D13	B1N1B13	B1N2B13
15	B1N1C15	B1N2C15	B1N1D15	B1N2D15	B1N1B15	B1N2B15
16	B1N1C16	B1N2C16	B1N1D16	B1N2D16	B1N1B16	B1N2B16
20	B1N1C20	B1N2C20	B1N1D20	B1N2D20	B1N1B20	B1N2B20
25	B1N1C25	B1N2C25	B1N1D25	B1N2D25	B1N1B25	B1N2B25
30	B1N1C30	B1N2C30	B1N1D30	B1N2D30	B1N1B30	B1N2B30
32	B1N1C32	B1N2C32	B1N1D32	B1N2D32	B1N1B32	B1N2B32
35	B1N1C35	B1N2C35	B1N1D35	B1N2D35	B1N1B35	B1N2B35
40	B1N1C40	B1N2C40	B1N1D40	B1N2D40	B1N1B40	B1N2B40
50	B1N1C50	B1N2C50	B1N1D50	B1N2D50	B1N1B50	B1N2B50
60	B1N1C60	B1N2C60	B1N1D60	B1N2D60	B1N1B60	B1N2B60
63	B1N1C63	B1N2C63	B1N1D63	B1N2D63	B1N1B63	B1N2B63

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Miniature Circuit Breakers

B1N UL 489 240 Vac; 10 kA - Box Lugs

Certifications

IEC/EN 60947-2

Green Highlight = Most Popular

Rated Amperage (A)	C Curve (5-10 In) Standard	D Curve (10-20 In) Inductive	B Curve (3-5 In) Electronic
	3-Pole - 240 Vac	3-Pole - 240 Vac	3-Pole - 240 Vac
	Catalog Number	Catalog Number	Catalog Number
0.5	B1N3C0.5	B1N3D0.5	B1N3B0.5
1	B1N3C1	B1N3D1	B1N3B1
1.6	B1N3C1.6	B1N3D1.6	B1N3B1.6
2	B1N3C2	B1N3D2	B1N3B2
3	B1N3C3	B1N3D3	B1N3B3
4	B1N3C4	B1N3D4	B1N3B4
5	B1N3C5	B1N3D5	B1N3B5
6	B1N3C6	B1N3D6	B1N3B6
7	B1N3C7	B1N3D7	B1N3B7
8	B1N3C8	B1N3D8	B1N3B8
10	B1N3C10	B1N3D10	B1N3B10
13	B1N3C13	B1N3D13	B1N3B13
15	B1N3C15	B1N3D15	B1N3B15
16	B1N3C16	B1N3D16	B1N3B16
20	B1N3C20	B1N3D20	B1N3B20
25	B1N3C25	B1N3D25	B1N3B25
30	B1N3C30	B1N3D30	B1N3B30
32	B1N3C32	B1N3D32	B1N3B32
35	B1N3C35	B1N3D35	B1N3B35
40	B1N3C40	B1N3D40	B1N3B40
50	B1N3C50	B1N3D50	B1N3B50
60	B1N3C60	B1N3D60	B1N3B60
63	B1N3C63	B1N3D63	B1N3B63

D

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Miniature Circuit Breakers

B1H UL 489 480Y/277 Vac 10 kA - Box Lugs

Certifications
IEC/EN 60947-2

Green Highlight = Most Popular

Rated Amperage (A)	C Curve (5-10 In) Standard		D Curve (10-20 In) Inductive		B Curve (3-5 In) Electronic	
	1-Pole 277 Vac	2-Pole 480Y/277 Vac	1-Pole 277 Vac	2-Pole 480Y/277 Vac	1-Pole 277 Vac	2-Pole 480Y/277 Vac
	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number
0.5	B1H1C0.5	B1H2C0.5	B1H1D0.5	B1H2D0.5	B1H1B0.5	B1H2B0.5
1	B1H1C1	B1H2C1	B1H1D1	B1H2D1	B1H1B1	B1H2B1
1.6	B1H1C1.6	B1H2C1.6	B1H1D1.6	B1H2D1.6	B1H1B1.6	B1H2B1.6
2	B1H1C2	B1H2C2	B1H1D2	B1H2D2	B1H1B2	B1H2B2
3	B1H1C3	B1H2C3	B1H1D3	B1H2D3	B1H1B3	B1H2B3
4	B1H1C4	B1H2C4	B1H1D4	B1H2D4	B1H1B4	B1H2B4
5	B1H1C5	B1H2C5	B1H1D5	B1H2D5	B1H1B5	B1H2B5
6	B1H1C6	B1H2C6	B1H1D6	B1H2D6	B1H1B6	B1H2B6
7	B1H1C7	B1H2C7	B1H1D7	B1H2D7	B1H1B7	B1H2B7
8	B1H1C8	B1H2C8	B1H1D8	B1H2D8	B1H1B8	B1H2B8
10	B1H1C10	B1H2C10	B1H1D10	B1H2D10	B1H1B10	B1H2B10
13	B1H1C13	B1H2C13	B1H1D13	B1H2D13	B1H1B13	B1H2B13
15	B1H1C15	B1H2C15	B1H1D15	B1H2D15	B1H1B15	B1H2B15
16	B1H1C16	B1H2C16	B1H1D16	B1H2D16	B1H1B16	B1H2B16
20	B1H1C20	B1H2C20	B1H1D20	B1H2D20	B1H1B20	B1H2B20
25	B1H1C25	B1H2C25	B1H1D25	B1H2D25	B1H1B25	B1H2B25
30	B1H1C30	B1H2C30	B1H1D30	B1H2D30	B1H1B30	B1H2B30
32	B1H1C32	B1H2C32	B1H1D32	B1H2D32	B1H1B32	B1H2B32

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Miniature Circuit Breakers

B1H UL 489 480Y/277 Vac 10 kA - Box Lugs

Certifications
IEC/EN 60947-2

Green Highlight = Most Popular

Rated Amperage (A)	C Curve (5-10 In) Standard	D Curve (10-20 In) Inductive	B Curve (3-5 In) Electronic
	3-Pole 480Y/277 Vac	3-Pole 480Y/277 Vac	3-Pole 480Y/277 Vac
	Catalog Number	Catalog Number	Catalog Number
0.5	B1H3C0.5	B1H3D0.5	B1H3B0.5
1	B1H3C1	B1H3D1	B1H3B1
1.6	B1H3C1.6	B1H3D1.6	B1H3B1.6
2	B1H3C2	B1H3D2	B1H3B2
3	B1H3C3	B1H3D3	B1H3B3
4	B1H3C4	B1H3D4	B1H3B4
5	B1H3C5	B1H3D5	B1H3B5
6	B1H3C6	B1H3D6	B1H3B6
7	B1H3C7	B1H3D7	B1H3B7
8	B1H3C8	B1H3D8	B1H3B8
10	B1H3C10	B1H3D10	B1H3B10
13	B1H3C13	B1H3D13	B1H3B13
15	B1H3C15	B1H3D15	B1H3B15
16	B1H3C16	B1H3D16	B1H3B16
20	B1H3C20	B1H3D20	B1H3B20
25	B1H3C25	B1H3D25	B1H3B25
30	B1H3C30	B1H3D30	B1H3B30
32	B1H3C32	B1H3D32	B1H3B32

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Miniature Circuit Breakers

B1NQ UL 489 120/240 Vac 10 kA - Box Lugs

Green Highlight = Most Popular

Certifications

IEC/EN 60947-2

Rated Amperage (A)	C Curve (5-10 In) Standard		D Curve (10-20 In) Inductive	
	1-Pole - 120 / 240 Vac	2 Pole - 120 / 240 Vac	1-Pole - 120 / 240 Vac	2 Pole - 120 / 240 Vac
	Catalog Number	Catalog Number	Catalog Number	Catalog Number
1	B1NQ1C1	B1NQ2C1	B1NQ1D1	B1NQ2D1
1.6	B1NQ1C1.6	B1NQ2C1.6	B1NQ1D1.6	B1NQ2D1.6
2	B1NQ1C2	B1NQ2C2	B1NQ1D2	B1NQ2D2
3	B1NQ1C3	B1NQ2C3	B1NQ1D3	B1NQ2D3
4	B1NQ1C4	B1NQ2C4	B1NQ1D4	B1NQ2D4
5	B1NQ1C5	B1NQ2C5	B1NQ1D5	B1NQ2D5
6	B1NQ1C6	B1NQ2C6	B1NQ1D6	B1NQ2D6
8	B1NQ1C8	B1NQ2C8	B1NQ1D8	B1NQ2D8
10	B1NQ1C10	B1NQ2C10	B1NQ1D10	B1NQ2D10
13	B1NQ1C13	B1NQ2C13	B1NQ1D13	B1NQ2D13
15	B1NQ1C15	B1NQ2C15	B1NQ1D15	B1NQ2D15
16	B1NQ1C16	B1NQ2C16	B1NQ1D16	B1NQ2D16
20	B1NQ1C20	B1NQ2C20	B1NQ1D20	B1NQ2D20
25	B1NQ1C25	B1NQ2C25	B1NQ1D25	B1NQ2D25
30	B1NQ1C30	B1NQ2C30	B1NQ1D30	B1NQ2D30
32	B1NQ1C32	B1NQ2C32	B1NQ1D32	B1NQ2D32
35	B1NQ1C35	B1NQ2C35	B1NQ1D35	B1NQ2D35
40	B1NQ1C40	B1NQ2C40	B1NQ1D40	B1NQ2D40
45	B1NQ1C45	B1NQ2C45	B1NQ1D45	B1NQ2D45
50	B1NQ1C50	B1NQ2C50	B1NQ1D50	B1NQ2D50
60	B1NQ1C60	B1NQ2C60	B1NQ1D60	B1NQ2D60
63	B1NQ1C63	B1NQ2C63	B1NQ1D63	B1NQ2D63



Accessory Description	Catalog Number
Flush Mount Clip (B1NQ only) - 1-Pole*	FMC31N

* Note: This accessory is not compatible with comb bus bar applications. They cannot be used on miniature circuit breakers when utilizing a comb bus bar.

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Miniature Circuit Breakers

UL 489 Technical Data

		B1N			B1H			B1NQ	
Conformed Standard		UL 489							
Number of Poles		1	2	3	1	2	3	1	2
Rated Operational Voltage (V)		240 Vac 60 Vdc	240 Vac 125 Vdc	240 Vac	480Y/277 Vac			120/240 Vac	
Rated Frequency (Hz)		50/60							
Rated Current (A)		0.5-63			0.5-32			1-63	
Instantaneous Tripping Type		B (3-5 In), C (5-10 In), D (10-20 In)						C (5-10 In), D (10-20 In)	
Interrupting (kA)	120 Vac	10	-		10	-		10	
	240 Vac	10				10			
	277 Vac	-		-	10			-	
	480Y/277 Vac				-				
	60 Vdc	10	10		-				
	125 Vdc	-		-	-			-	
Inverse Time-Delay Over-Current Release Type		Thermal-Magnetic							
Service Life	Electrical	10,000						6,000	
	Mechanical	20,000						10,000	
Protection Degree		IP 20							
Wire AWG	Single Wire	18-4							
	Two Wires	#18-6 / #14-10							
Operating Temperature Range		-22 °F to 167 °F (-30 °C to +75 °C)							
Insulation Coordination	Rated Insulation Voltage (Vac)	500							
	Rated Impulse Withstand Voltage (kV)	6							
Pollution Degree		Class III							
Over Voltage Category		Class III							
Mounting		35 mm DIN rail / Flush and surface mount available on B1NQ with the use of additional mounting clips							
Altitude ft (m)		<6,561 (2,000)							
Atmospheric Conditions		At 68 °F (+20), the relative humidity does not exceed 90% At 104 °F (+40), the relative humidity does not exceed 50%							

* AWG = American Wire Gauge

D

Miniature Circuit Breakers

UL 489 Accessories



Green Highlight = Most Popular

Accessory Description	Auxiliary Contact	Catalog Number
Alarm Switch*	1NO+1NC	AL3111N
Auxiliary Contact*	1NO+1NC	AX3111N

		Alarm Switch	Auxiliary Contact
		AL	AX
Ratings (50/60 Hz)	Vac	480/277V (3A) 240V (6A)	
	Vdc	250V (0.5A) 125V (1A) 24V (6A)	

Accessory Description	Voltage Ratings	Auxiliary Contact	Catalog Number
Shunt Trip*	12-24 Vac/dc	-	SHT31NC
	48-60 Vac/dc	-	SHT31NB
	110-415 Vac/110-130 Vdc	-	SHT31NA
	12-24 Vac/dc	1NO+1NC	SHT3111NC
	48-60 Vac/dc	1NO+1NC	SHT3111NB
	110-415 Vac/110-130 Vdc	1NO+1NC	SHT3111NA
Under-Voltage Trip*	240 Vac	1NC	UVT3101NA
	48 Vac/dc	1NC	UVT3101NB
	240 Vac	1NO	UVT3110NA
	48 Vac/dc	1NO	UVT3110NB
	240 Vac	-	UVT31NA
	48 Vac/dc	-	UVT31NB

Accessory Description	Catalog Number
Padlock* (Lock Off)	LK31N

Accessory Description	Catalog Number
Surface Mount Clip - 1-Pole*	SMC311N
Surface Mount Clip - 2 Pole*	SMC312N

Accessory Description	Catalog Number
35 mm DIN rail	TH35A75

* Note: These accessories are not compatible with comb bus bar.

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Miniature Circuit Breakers

UL 489 Accessories: Comb Bus Bar Specifications

Green Highlight = Most Popular

Description	Catalog Number
Top Feed Terminal (35mm) *	FD35UL
Bottom Feed Terminal (50mm) *	FD50UL
End Cap 1-3p *	EC489
Protective Cap *	PC489

* Sold in multiples of 10.
Example: FD35UL order quantities of 10, 20, 30, 40 etc.

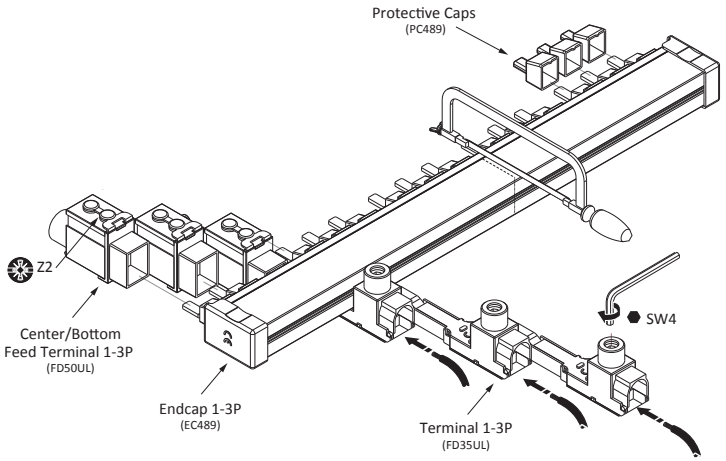

	Phase	No. of Pins	No. of Circuit Breakers	Poles	Cross Section	Rating	Catalog Number
UL 489	1	6	6x	1	25mm	100A (End Feed) 200A (Center Feed)	CBA1P06P25UL
	1	12	12x	1			CBA1P12P25UL
	1	18	18x	1			CBA1P18P25UL
	1	57	57x	1			CBA1P57P25UL
	2	6	3x	2			CBA2P06P25UL
	2	12	6x	2			CBA2P12P25UL
	2	18	9x	2			CBA2P18P25UL
	2	56	28x	2			CBA2P56P25UL
	3	6	2x	3			CBA3P06P25UL
	3	12	4x	3			CBA3P12P25UL
	3	18	6x	3			CBA3P18P25UL
	3	57	19x	3			CBA3P57P25UL

Note: J Fuse Rating 14 kA

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Supplementary Protectors
UL 1077 Product Overview

Features

The B1E UL 1077 miniature circuit breaker has a complete range of amperages from 1A to 125A. Standard ratings of 5 kA at 480Y/277 Vac and 10 kA at 240 Vac. These are suitable for supplementary protection.

- Breakers mount on standard 35 mm DIN rail
- Thermal-magnetic over current protection – three levels of protection, categorized by B, C and D curves
- Fulfills UL 1077, IEC 60947-2 standard
- Field-installable shunt trip and auxiliary switch up to 63A
- Module width of only 0.71 in (18 mm) per pole
- Contact position indicator (red/green)
- 5-Year limited warranty

5 years
LIMITED WARRANTY

Typical Application

- Supplementary protection control circuits
- Cabinet lighting
- Business equipment
- Appliances

Certifications

UL 1077 No. E355391 / CSA C22.2 No.235 / IEC 60947-2

- Supplementary Protectors are UL Recognized for use in the United States in accordance with NFPA® 70 (NEC).
- These devices comply with UL 1077 No. E355391 and Certified for Canada CSA standards 22.2 No. 5 meeting the requirements for supplementary protectors.
- These devices are for international and domestic use, and also comply with IEC 60947-2 and are CE marked.

Supplementary Protectors

B1E 1-63 Amperes UL 1077 480Y/277 Vac

Certifications

IEC/EN 60947-2

Green Highlight = Most Popular

Rated Amperage (A)	Curve (5-10 In) (General)		
	1-Pole - 277 Vac	2-Pole - 480 Vac	3-Pole - 480 Vac
	Catalog Number	Catalog Number	Catalog Number
1	B1E1C1	B1E2C1	B1E3C1
1.6	B1E1C1.6	B1E2C1.6	B1E3C1.6
2	B1E1C2	B1E2C2	B1E3C2
3	B1E1C3	B1E2C3	B1E3C3
4	B1E1C4	B1E2C4	B1E3C4
5	B1E1C5	B1E2C5	B1E3C5
6	B1E1C6	B1E2C6	B1E3C6
8	B1E1C8	B1E2C8	B1E3C8
10	B1E1C10	B1E2C10	B1E3C10
13	B1E1C13	B1E2C13	B1E3C13
15	B1E1C15	B1E2C15	B1E3C15
16	B1E1C16	B1E2C16	B1E3C16
20	B1E1C20	B1E2C20	B1E3C20
25	B1E1C25	B1E2C25	B1E3C25
30	B1E1C30	B1E2C30	B1E3C30
32	B1E1C32	B1E2C32	B1E3C32
35	B1E1C35	B1E2C35	B1E3C35
40	B1E1C40	B1E2C40	B1E3C40
50	B1E1C50	B1E2C50	B1E3C50
60	B1E1C60	B1E2C60	B1E3C60
63	B1E1C63	B1E2C63	B1E3C63

Rated Amperage (A)	D Curve (10-20In) (Inductive)		
	1-Pole - 277 Vac	2-Pole - 480 Vac	3-Pole - 480 Vac
	Catalog Number	Catalog Number	Catalog Number
1	B1E1D1	B1E2D1	B1E3D1
1.6	B1E1D1.6	B1E2D1.6	B1E3D1.6
2	B1E1D2	B1E2D2	B1E3D2
3	B1E1D3	B1E2D3	B1E3D3
4	B1E1D4	B1E2D4	B1E3D4
5	B1E1D5	B1E2D5	B1E3D5
6	B1E1D6	B1E2D6	B1E3D6
8	B1E1D8	B1E2D8	B1E3D8
10	B1E1D10	B1E2D10	B1E3D10
13	B1E1D13	B1E2D13	B1E3D13
15	B1E1D15	B1E2D15	B1E3D15
16	B1E1D16	B1E2D16	B1E3D16
20	B1E1D20	B1E2D20	B1E3D20
25	B1E1D25	B1E2D25	B1E3D25
30	B1E1D30	B1E2D30	B1E3D30
32	B1E1D32	B1E2D32	B1E3D32
35	B1E1D35	B1E2D35	B1E3D35
40	B1E1D40	B1E2D40	B1E3D40
50	B1E1D50	B1E2D50	B1E3D50
60	B1E1D60	B1E2D60	B1E3D60
63	B1E1D63	B1E2D63	B1E3D63

Rated Amperage (A)	1-Pole	2-Pole	3-Pole
	Catalog Number	Catalog Number	Catalog Number
80*	B1E1P80	B1E2P80	B1E3P80
100*	B1E1P100	B1E2P100	B1E3P100
125*	B1E1P125	B1E2P125	B1E3P125

*Note: No accessories available for B1E 80-125 A

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Supplementary Protectors

B1E 1-63 Amperes UL 1077 480Y/277 Vac

Certifications

IEC/EN 60947-2

Green Highlight = Most Popular

Rated Amperage (A)	B Curve (3-5 In) (Electronic)		
	1-Pole - 277 Vac	2-Pole - 480 Vac	3-Pole - 480 Vac
	Catalog Number	Catalog Number	Catalog Number
1	B1E1B1	B1E2B1	B1E3B1
1.6	B1E1B1.6	B1E2B1.6	B1E3B1.6
2	B1E1B2	B1E2B2	B1E3B2
3	B1E1B3	B1E2B3	B1E3B3
4	B1E1B4	B1E2B4	B1E3B4
5	B1E1B5	B1E2B5	B1E3B5
6	B1E1B6	B1E2B6	B1E3B6
8	B1E1B8	B1E2B8	B1E3B8
10	B1E1B10	B1E2B10	B1E3B10
13	B1E1B13	B1E2B13	B1E3B13
15	B1E1B15	B1E2B15	B1E3B15
16	B1E1B16	B1E2B16	B1E3B16
20	B1E1B20	B1E2B20	B1E3B20
25	B1E1B25	B1E2B25	B1E3B25
30	B1E1B30	B1E2B30	B1E3B30
32	B1E1B32	B1E2B32	B1E3B32
35	B1E1B35	B1E2B35	B1E3B35
40	B1E1B40	B1E2B40	B1E3B40
50	B1E1B50	B1E2B50	B1E3B50
60	B1E1B60	B1E2B60	B1E3B60
63	B1E1B63	B1E2B63	B1E3B63

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Supplementary Protectors

UL 1077 B1E 1-63 Amperes Technical Data

		B1E 1-63A			B1E 80-125A		
Conformed Standard		UL 1077					
Rated Operational Voltage (V)		480Y/277 Vac; 60/125 Vdc			480Y/277 Vac, 110/220 Vdc		
Rated Frequency (Hz)		50/60					
Rated Current (A)		1-63			80-125		
Number of Poles		1	2	3	1	2	3
Instantaneous Tripping Type		B (3-5 In), C (5-10 In), D (10-20 In)			(8-12 In)		
Interrupting (kA)	120 Vac	10	-		5	-	
	120/240 Vac	-					
	208 Vac	-					
	240 Vac	10					
	277 Vac	5	-				
	480/277 Vac	-	5		-	5	
	60 Vdc	10	-		10	-	
	110 Vdc				10	10	
	125 Vdc	-	10	-	-		
	220 Vdc	-				10	-
Inverse Time-Delay Over-Current Release Type		Thermal-Magnetic					
Service Life	Electrical	6,000			1,500 (80-100A) 1,000 (125 A)		
	Mechanical	20,000			8,000 (80-100A) 7,000 (125A)		
Protection Degree		IP 20					
Wire AWG*		#18-4			#4-1/0		
Operating Temperature Range		-22 °F to 167 °F (-30 °C to +75 °C)					
Insulation Coordination	Rated Insulation Voltage (Vac)	500					
	Rated Impulse Withstand Voltage (kV)	6			8		
Pollution Degree		Class III					
Over Voltage Category / Mounting		Class III / 35 mm DIN rail					
Altitude ft (m)		<6,561 (2,000)					
Atmospheric Conditions		At 68 °F (+20), the relative humidity does not exceed 90% At 104 °F (+40), the relative humidity does not exceed 50%					

* AWG = American Wire Gauge

Supplementary Protectors

UL 1077 Accessories: Alarm Switch, Auxiliary Contact

Green Highlight = Most Popular



Accessory Description	Catalog Number
Alarm Switch*	AL3111U
Auxiliary Contact*	AX3111U

		Alarm Contact	Auxiliary Contact
		AL	AX
Ratings (50/60 Hz)	Vac	480 (3A) 277 (3A) 240 (6A)	
	Vdc	250 (0.5A) 125 (1A) 48 (2A) 24 (6A)	

- Not for use with 80-125 A



Accessory Description	Rated Voltage	Auxiliary Contact	Catalog Number
Shunt Trip*	12-24 Vac/dc	-	SHT31UC
	48-60 Vac/dc	-	SHT31UB
	110-415 Vac/110-130 Vdc	-	SHT31UA
	12-24 Vac/dc	1NO+1NC	SHT3111UC
	48-60 Vac/dc	1NO+1NC	SHT3111UB
	110-415 Vac/110-130 Vdc	1NO+1NC	SHT3111UA
Under-Voltage Trip*	240 Vac	1NC	UVT3101UA
	48 Vac/dc	1NC	UVT3101UB
	240 Vac	1NO	UVT3110UA
	48 Vac/dc	1NO	UVT3110UB
	240 Vac	-	UVT31UA
	48 Vac/dc	-	UVT31UB

* Note: These accessories are not compatible with comb bus bar.

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Supplementary Protectors

UL 1077 Accessories: Comb Bus Bar

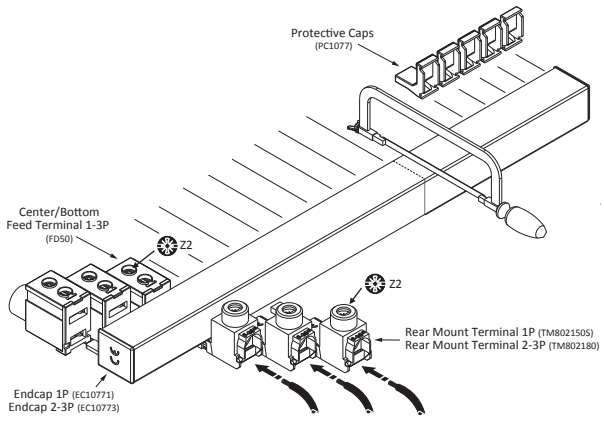

Green Highlight = Most Popular

Description	Poles	Cross Section	Catalog Number
Top Feed Terminal*	1	35 mm	TM802150S
	2/3	35 mm	TM802180
Bottom Feed Terminal*	-	50 mm	FD50
End Cap*	1	-	EC10771
	2/3	-	EC10773
Protective Cap*	-	-	PC1077

* Sold in multiples of 10.
Example: PC1077 order quantities of 10, 20, 30, 40 etc.

D

	Phase	No. of Pins	No. of Circuit Breakers	Poles	Cross Section	Rating	Catalog Number
UL 1077	1	6	6	1	25 mm	100 amp (End Feed) 200 amp (Center Feed)	CBB1P06P25
	1	12	12	1			CBB1P12P25
	1	18	18	1			CBB1P18P25
	1	57	57	1			CBB1P57P25
	2	6	3	2			CBB2P06P25
	2	12	6	2			CBB2P12P25
	2	18	9	2			CBB2P18P25
	2	56	28	2			CBB2P56P25
	3	6	2	3			CBB3P06P25
	3	12	4	3			CBB3P12P25
	3	18	6	3			CBB3P18P25
	3	57	19	3			CBB3P57P25

Comb Bus Bar Specifications			UL 1077 1-Pole	UL 1077 2 & 3-Pole
Voltage Ratings	Maximum AC Voltage (Vac)		600	
	Maximum DC Voltage (Vdc)		1,000	600
Current Ratings	Maximum Current 25 mm^2 Cross Sections (A)	End Feed	100	
		Center Feed	200	
Protection Class			IP 20	
J Fuse Rating (kA)			10	

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Manual Motor Starters
Ex9S32 Product Overview

Features

Ex9S32 Manual Motor Starter provide manual isolation, manual motor control, and overcurrent protection. Ex9S32 Manual Motor Starters are electro-mechanical devices combining the functions below in one unit.

- Disconnect for Motor Branch Circuit
- Manual Motor Control (Automatic when used with contactor)
- Branch-Circuit Short Circuit Protection (Magnetic Protection)
- Overload Protection (Thermal Protection) - Trip Class 10
- 5-Year limited warranty

5 years LIMITED WARRANTY

The National Electrical Code (NEC) requires an individual motor branch circuit be protected by a UL/CSA listed fuse, circuit breaker or self-protected combination motor controller.

Available as:

- Up to 32A @ 600 Vac
- UL 60941-4-1 (formerly UL 508) Type E Self Protection or UL 60947-4-1 Type F Group Motor Protection
- Full range of accessories
- Lockable handle

Certifications

- UL 60947-1/UL 60947-4-1 listed, file No. E467185
- UL 508 listed, file No. E476273
- IEC/EN 60947-2/-4-1
- CCC Certified

c UL us LISTED CE NOM CCC

Standards Compliance

- IEC/EN 60947-1, -2, -4-1, -5-1
- UL 508
- UL 60947-1; -4-1
- UL 489

Manual Motor Starters

Ex9S32

Green Highlight = Most Popular

Certifications

IEC/EN 60947-4-1

32A	
Rated Amperage (Min - Max)	Rotary Handle Catalog Number
0.10-0.16	Ex9S32A0.16A
0.16-0.25	Ex9S32A0.25A
0.25-0.40	Ex9S32A0.4A
0.40-0.63	Ex9S32A0.63A
0.63-1	Ex9S32A1A
1-1.6	Ex9S32A1.6A
1.6-2.5	Ex9S32A2.5A
2.5-4	Ex9S32A4A

32A	
Rated Amperage (Min - Max)	Rotary Handle Catalog Number
4-6.3	Ex9S32A6.3A
6-10	Ex9S32A10A
9-14	Ex9S32A14A
13-18	Ex9S32A18A
17-23	Ex9S32A23A
20-25	Ex9S32A25A
24-32	Ex9S32A32A

Technical Data

Description		Ex9S32
Rated operational current I_e (A)		32A
Conventional rated thermal current Ith (A)		0.16-32A
Tripping Class		10
Rated insulation voltage U_i (Vac)		690/IEC; 600/UL, 600/CSA
Rated operational voltage U_e (AC)		230/240, 400/415, 460/480, 575/600
Rated impulse withstand voltage U_{imp} (AC)		6000V
Rated Operational Frequency (Hz)		50/60Hz
Resistance to shock		30 gn -11 ms
Resistance to vibrations		5 gn (5 -150Hz)
Environmental Temperature	Transportation or Storage	-76 to 176°F (-60 to 80°C)[1]
	Working at	-4 to 158°F (-20 to 70°C)[2]
	Testing at	23 to 104°F (-5 to 40°C)
Altitude ft (m)		<6,562 (2,000)
Ambient Conditions		At mounting site, relative humidity not exceed 90% at the max testing temperature 104°F (40°C), higher relative humidity is allowable under lower temperature
Pollution Grade		III
Mounting Conditions		The inclination between the mounting plane and the vertical plane shall not exceed 30°; The product shall be installed and operated at a place without obvious shake, impact and vibration.
Interrupting Rating Icu		See Technical Data on page 44
Service life (cycles)	Electrical	100,000
	Mechanical	100,000
Duty Class (cycles/hr)		30, max. operating rate
Degree of Protection		IP 20

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Manual Motor Starters

UL 60947-4-1 (formerly UL 508) Type E Application

The National Electrical Code (NEC) requires the following when controlling a motor:

- A means of disconnecting power from the circuit
- Short circuit protection for the cables
- A way to start and stop the motor (typically a contactor)
- Overload protection for the motor (typically an overload relay)

The EX9S32 can provide (self protected) UL 60947-4-1 (formerly UL 508) Type E protection when used in conjunction with a contactor, terminal extension, and an alarm contact.

TYPE E

Components	Catalog Number	Product
Manual Motor Starter 0.10-32 Amps	EX9S32	
Contactor	EX9C or EX9CS	
Terminal cover/extension for Ex9S32 for use in type E application	CCE51	
Fault Signaling/Alarm Contact	AL5111	
Mounting Bracket For mounting a Ex9S32 to a Ex9C Standard Type Contactor, 9-38A	DRA51	
Connection Block Between Ex9S32 and Ex9CS Mini Type Contactor 09-12A	CC51	
	or	
Connection Block Between Ex9S32 and Ex9C Standard Type Contactor 09-18A	CC52	
	or	
Connection Block Between Ex9S32 and Ex9C Standard Type Contactor 25-38A	CC53	

Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.

*NEC-National Electrical Code
** CEC-Canadian Electrical Code

Manual Motor Starters

UL 60947-4-1 (formerly UL 508) Type F Application

The EX9S32 can provide (group motor) UL 60947-4-1 (formerly UL 508) Type F protection when used in conjunction with a contactor. No alarm contact or terminal extension required.

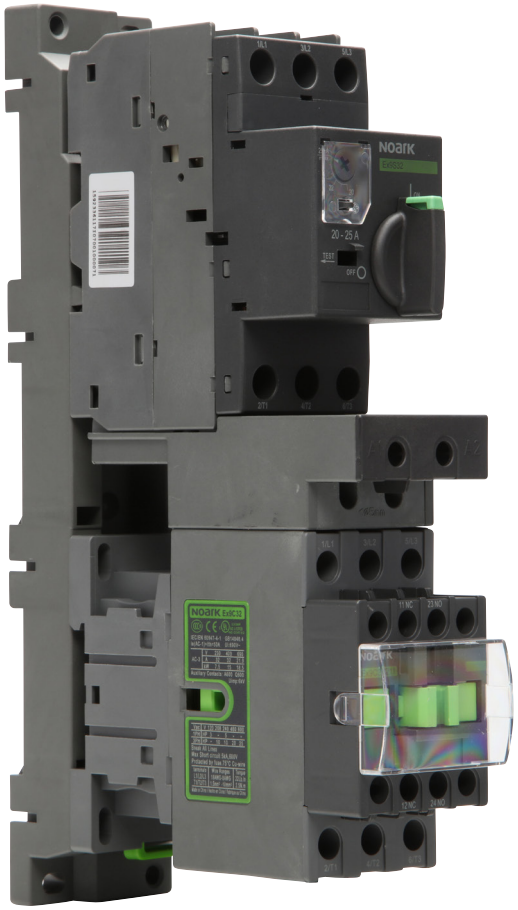

TYPE F

Components	Catalog Number	Product
Manual Motor Starter 0.10-32 Amps	EX9S32	
Contactor	EX9C or EX9CS	
Mounting Bracket for mounting a Ex9S32 to a Ex9C Standard Type Contactor, 9-38A	DRA51	
Connection Block between Ex9S32 and Ex9CS Mini Type Contactor 9-12A	CC51	
	or	
Connection Block between Ex9S32 and Ex9C Standard Type Contactor 9-18A	CC52	
	or	
Connection Block between Ex9S32 and Ex9C Standard Type Contactor 25-38A	CC53	

E

Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.

*NEC-National Electrical Code
** CEC-Canadian Electrical Code

Manual Motor Starters

Ex9S32 Accessories

Green Highlight = Most Popular

Auxiliary Contact Blocks

Description	Mounting Location	Max. No. of Blocks	Contact Type	Catalog Number
Instantaneous auxiliary contacts	Front	1	NO+NC	AX5111
	Left Side	2	NO+NC	AX5211
Fault Signaling Contact		1	NO+NC	AL5111

AX51

AX52

Electrical Trip Unit

Description	Mounting Location	Voltage	Hz	Catalog Number
Undervoltage Release	Right Side	110-120V	60	UVT51A
		208V	60	UVT51C
		480V	60	UVT51E
		600V	60	UVT51F
Shunt Release	Right Side	100-130V	50/60	SHT51A

UVT51

Ex9S32 + CC53 + Ex9C32 + DRA51

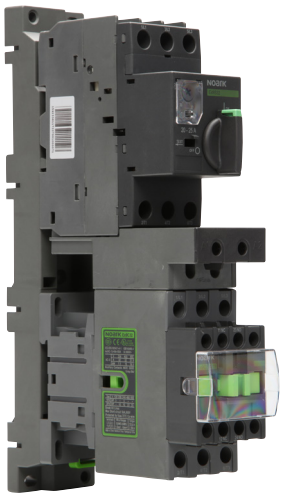

Terminal Cover

Description	Application	Catalog Number
Terminal Cover	Terminal cover for Ex9S32 for use in type E application	CCE51

CCE51

Busbars

Description	No. of Ex9S32 Starter	No. of Side-Mounted Aux Contact on each Ex9S32 starter	Busbar Pitch (mm)	SKU
Sets of 3-pole, 63A Busbar	2	None	45	BBUM 245
		1 of AX52, AL51	54	BBUM 254
		2 of AX52 or 1 UVT51, SHT51	63	BBUM 263
	3	None	45	BBUM 345
		1 of AX52, AL51	54	BBUM 354
		2 of AX52 or 1 UVT51, SHT51	63	BBUM 363
	4	None	45	BBUM 445
		1 of AX52, AL51	54	BBUM 454
		2 of AX52 or 1 UVT51, SHT51	63	BBUM 463
	5	None	45	BBUM 545
		1 of AX52, AL51	54	BBUM 554
		2 of AX52 or 1 UVT51, SHT51	63	BBUM 563

BBUM 4



Bus Bar Wiring Accessories

Description	Application	Catalog Number
Input Terminal for BBUM Busbar	Terminal block for power supply to one or more BBUM busbar	FD51*
Protective End Cover	For unused busbar outlets	PC51*

* Sold in multiples of 10. Example: FD51 order quantities of 10, 20, 30, 40 etc.

PC51

FD51

Mounting Accessories

Description	Application	Catalog Number
Connection Block	Between Ex9S32 and Ex9C Mini Type Contactor, 09-12A	CC51
	Between Ex9S32 and Ex9C Standard Type Contactor, 09-18A	CC52
	Between Ex9S32 and Ex9C Standard Type Contactor, 25-38A	CC53
Mounting Bracket	For mounting a Ex9S32 to a Ex9C Standard Type Contactor, 9-38A	DRA51

CC51 CC52 CC53

DRA51

Enclosures

Description	Type	Color	Rating	Catalog Number
Waterproof Enclosure; Ex9S32 Protectors	Operation by rotary handle	Black/ Gray	NEMA 4/4X, IP 65	WPB51B
		Yellow/ Red		WPB51Y

WPB51B

WPB51Y

Operation Handle

- Typically used with enclosures 6" to 12" depth.

Description	Type	Color	Rating	Catalog Number
Extended Rotary Handle	9 inch (230mm) shaft, with bracket	Black/ Gray	NEMA 4/4X, IP 65	ERH51B
		Yellow/ Red		ERH51Y

ERH51B

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Manual Motor Starters

Ex9S32 and Accessories: Technical Data

Manual Self- Protected Starter	Overload Trip Range(A)	Standard Motor Ratings @50/60 Hertz						Short Circuit Rating (SCCR)						UL 60947-4-1 Type E Components				
		1 Phase		3 Phase				Stand Alone		UL 508 Type E		UL 508 Type F		UL 60947-4-1 Type F Components			Fault Contact and Terminal
		110/ 120V	230/ 240V	200/ 208V	230/ 240V	460/ 480V	575/ 600V	240V or 480/ 277V	600/ 347V	240V or 480/ 277V	600/ 347V	240V or 480/ 277V	600/ 347V	Contactor	DIN rail Base Plate	Manual Motor Starter Connector	
Ex9S32A0.16A	0.1-0.16	-	-	-	-	-	-	65,000	5,000	65,000	10,000	65,000	10,000	Ex9CS09 or Ex9C12	DRA51	CC51 (Mini Contactor) or CC52 (Standard Contactor)	CCE51 and AL5111
Ex9S32A0.25A	0.16-0.25	-	-	-	-	-	-										
Ex9S32A0.4A	0.25-0.4	-	-	-	-	-	-										
Ex9S32A0.63A	0.4-.63	-	-	-	-	-	-										
Ex9S32A1A	0.63-1	-	-	-	-	-	1/2										
Ex9S32A1.6A	1-1.6	-	1/10	-	-	3/4	3/4										
Ex9S32A2.5A	1.6-2.5	-	1/6	1/2	1/2	1	1.5										
Ex9S32A4A	2.5-4	1/8	1/3	3/4	3/4	2	3										
Ex9S32A6.3A	4-6.3	1/4	1/2	1	1.5	3	5										
Ex9S32A10A	6-10	1/2	1.5	2	3	5	7.5										
Ex9S32A14A	9-14	3/4	2	3	3	10	10							Ex9C18		CC52	
Ex9S32A18A	13-18	1	3	5	5	10	-	42,000		42,000	-	42,000	-	Ex9C25		CC53	
Ex9S32A23A	17-23	1.5	3	5	7.5	15	-										
Ex9S32A25A	20-25	2	-	-	7.5	15	-							Ex9C38			
Ex9S32A32A	24-32	2	5	7.5	10	20	-										

E

Ex9S32 Accessories: Technical Data

Auxiliary contacts	AX51	AX52	AL51
Rated operational voltage Ue	300V	600V	600V
Rated frequency	50/60Hz	50/60Hz	50/60Hz
Rated impulse withstand voltage Uimp	2500V	6000V	6000V
Conventional rated thermal current (Ith)	2.5A	5A	5A
Mechanical life (C-O operations)	100,000	100,000	100,000
Electrical life (C-O operations)	AC-15 : 10,000	AC-15 : 10,000	AC-14 : 1,000

Terminal Wiring

Model	Wire Ranges (AWG*)	Torque in-lb (N.m)	Screw Type	
Ex9S32	(1) x #14 - (2) x #8	1.85 (2.5)	M4	Phillips / Slot Head
AX51	(1) x #18 - (2) x #12	0.59 (0.8)	M3	
AX52	(1) x #18 - (2) x #12	0.59 (0.8)	M3	
AL51	(1) x #18 - (2) x #12	0.59 (0.8)	M3	
UVT51	(1) x #18 - (2) x #12	1.254 (1.7)	M3.5	
SHT51	(1) x #18 - (2) x #12	1.254 (1.7)	M3.5	

* AWG = American Wire Gauge

IEC Contactors

Ex9C Product Overview

Features

Ex9C contactors are intended for various applications including heavy industrial loads. Nine frame sizes allows optimization of electrical parameters and mechanical dimensions. A range of overload relays are available in a variety of frame sizes to fit respective contactors of given rated current.

- Nine frame sizes with rated current up to 1000A at 690V AC-3
- Coil control voltages available in AC and DC with ranges from 24-600V
- Wide range electronic coil available for 9-500A contactors features built-in surge suppression
- DIN rail 35 mm and panel mountable

5 years
LIMITED WARRANTY

Certifications

- UL 508 Listed, File Number E353866, UL 60947-1 and 60947-4-1
- Certified for Canada CSA standards 22.2 No. 14 under cUL testing
- IEC/EN 60947-4-1
- CE Approved
- CCC Certified

IEC Contactors

Ex9CS 6 -12 Amperes Miniature

- Built-in auxiliary contacts on 3-pole; additional auxiliary contacts are front mounted
- Non-Reversing

Green Highlight = Most Popular

Certifications

IEC/EN 60947-1, 60947-4-1
UL 60947-1, 60947-4-1

Rated Amperage (A)		120 Vac Coil		24 Vdc Coil	
		Catalog Number	Catalog Number	Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO	Power Poles - 3NO Auxiliary Contact - 1NC	Power Poles - 3NO Auxiliary Contact - 1NO	Power Poles - 3NO Auxiliary Contact - 1NC
3-Pole	6	Ex9CS0610G7	Ex9CS0601G7	Ex9CS06D10B	Ex9CS06D01B
	9	Ex9CS0910G7	Ex9CS0901G7	Ex9CS09D10B	Ex9CS09D01B
	12	Ex9CS1210G7	Ex9CS1201G7	Ex9CS12D10B	Ex9CS12D01B
		Power Poles - 4NO	Power Poles - 2NO+2NC	Power Poles - 4NO	Power Poles - 2NO+2NC
4-Pole	6	Ex9CS06G7C	Ex9CS06G7B	Ex9CS06DBC	Ex9CS06DBB
	9	Ex9CS09G7C	Ex9CS09G7B	Ex9CS09DBC	Ex9CS09DBB
	12	Ex9CS12G7C	Ex9CS12G7B	Ex9CS12DBC	Ex9CS12DBB

- Built-in auxiliary contacts on 3-pole; additional auxiliary contacts are front mounted
- Reversing

Rated Amperage (A)		120 Vac Coil		24 Vdc Coil	
		Catalog Number	Catalog Number	Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO	Power Poles - 3NO Auxiliary Contact - 1NC	Power Poles - 3NO Auxiliary Contact - 1NO	Power Poles - 3NO Auxiliary Contact - 1NC
3-Pole	6	Ex9CSR0610G7	Ex9CSR0601G7	Ex9CSR06D10B	Ex9CSR06D01B
	9	Ex9CSR0910G7	Ex9CSR0901G7	Ex9CSR09D10B	Ex9CSR09D01B
	12	Ex9CSR1210G7	Ex9CSR1201G7	Ex9CSR12D10B	Ex9CSR12D01B
		Power Poles - 4NO	Power Poles - 2NO+2NC	Power Poles - 4NO	Power Poles - 2NO+2NC
4-Pole	6	Ex9CSR06G7C	-	Ex9CSR06DBC	-
	9	Ex9CSR09G7C	-	Ex9CSR09DBC	-
	12	Ex9CSR12G7C	-	Ex9CSR12DBC	-

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Contactors

Ex9CS/CSR Technical Data

			Ex9CS/CSR		
			6	9	12
General Information					
Pole			3, 4		
Production Standard			IEC 60947-1, IEC 60947-4-1, UL 60947-1, UL 60947-4-1		
Environmental Testing According to			IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-11, IEC 60068-2-30		
Rated Frequency (Hz)			50/60		
Conventional Free Air Thermal Current Ith (A)	0≤104 °F (0≤40 °C)		20		
	0≤140 °F (0≤60 °C)				
	0≤158 °F (0≤70 °C)		16		
Rated Insulating Voltage Ui (V)			690		
Rated Impulse Withstand Voltage Uimp (kV)			6		
Electrical Life	AC-3	380/400V	1,200,000		
	AC-4		50,000	40,000	
Mechanical Life			10,000,000		
Operating Cycles Per Hour (cycles/h)	AC-3		1,200		
	AC-4		300		
Environmental Temperature	Transportation or Storage		-76 to 176 °F (-60 to +80 °C)		
	Working At		-4 to 140 °F (-20 to +60 °C)		
	Maximum		-40 to 158 °F (-40 to +70 °C)		
Altitude ft (m)			<6,562 (2,000)		
Pollution Degree			Class III		
Rated Operational Current Ie (A)					
At -82 to 131 °F (-25 to 40 °C)	AC-1	690V	20		
	AC-3	380/400V	6	9	12
	AC-3	660/690V	3.8	4.9	
	AC-4	380/400V	6	9	12
	AC-4	660/690V	3.8	4.9	
Rated Power of 3-Phase Motor					
For IEC (kW)	AC-3	230 Vac	-		
	AC-4				
	AC-3	380/400 Vac	2.2	4	5.5
	AC-4				
	AC-3	660/690 Vac	3	4	
	AC-4				
	AC-3	1,000 Vac	-		
	AC-4				
UL Rating					
Ith (A)			20		
Single-Phase (HP)		110-120 Vac	0.5		0.75
		220-240 Vac	1	1.5	2
Three-Phase (HP)		200-208 Vac	1.5	3	
		220-240 Vac	2		
		440-480 Vac	3	5	7.5
		550-600 Vac	5	7.5	10
Coil Voltage (V)			24-500 Vac, 12-250 Vdc		

			Ex9CS/CSR		
			6	9	12
Coil Electrical Parameters					
Tolerance of Control Voltage 50/60 Hz	Operation (Uc)	Standard	85% -,110%		
	Drop-Off (Uc)	Standard	20% - 75% (AC) 10% - 75% (DC)		
Coil Power Consumption					
In Rush (VA)		AC	70		
Sealed (VA)		AC	9		
Pick-Up (W)		DC	4		
Hold (W)		DC	4		
Operating Time (ms)	Operation	Standard	10-20		
	Drop-Off	Standard	4-16		
IEC AC Contactor Working at DC Power Data					
	Rated Working Voltage (V)	Poles connected in Series	Rated Working Current (A)		
Working Type: DC-1, Resistive Load Time Data: L/R≤1ms Environmental Temperature: ≤140 °F (≤60 °C)	24	1	15		
		2			
		3			
	48/75	1			
		2			
		3			
	125	1	4		
		2	15		
		3			
	225	1	1		
		2	4		
		3	15		
IEC AC Contactor Working at DC Power Data					
	Rated Working Voltage (V)	Poles connected in Series	Rated Working Current (A)		
Working Type: DC-2 to DC-5, Inductive Load Time Data: L/R≤15ms Environmental Temperature: ≤140 °F (≤60 °C)	24	1	15		
		2			
		3			
	48/75	1	5		
		2	15		
		3			
	125	1	1.5		
		2	11		
		3	15		
	225	1	0.5		
		2	1.5		
		3	5		

IEC Contactors

Ex9CS/CSR Technical Data

		Ex9CS/CSR		
		6	9	12
Built-In Auxiliary Contacts				
Auxiliary Contacts		1NO or 1NC (3P), None (4P)		
Rated Operation Voltage Ue (V)		690		
Rated Insulating Voltage Ui (V)				
Rated Impulse Withstand Voltage Uimp (kV)		6		
Rated Frequency (Hz)		50/60		
Conventional Free Air Thermal Current Ith (A)		10		
Rated Operational Current Ie (A)				
AC-15	120 V	6		
	240 V	3		
	380 V	1.9		
	600 V	1.2		
DC-13	125 V	0.55		
	220 V	0.31		
Mounting	Screw (mm)	ø4		
	DIN rail (mm)	35/7.5		
Dimension LxWxH in		1.93 x 2.32 x 2.28		
Weight lb (kg)		0.40 (0.18)		
Degree of Protection		IP 20		
Main Power Terminal Connection				
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#18-12		
	Dual Cable			
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable			
	Dual Cable			
Screw Size ø (mm)		M3		
Torque of Terminals in-lb (N.m)		7 (0.80)		
Auxiliary Contact Terminal Connection				
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#18-12		
	Dual Cable			
Stiff Cable With Cold-Press Terminal AWG*	Single Cable			
	Dual Cable			
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable			
	Dual Cable			
Screw Size ø (mm)		M3		
Torque of Terminals in-lb (N.m)		7 (0.80)		

* AWG = American Wire Gauge

F

Thermal Overload Relay

Ex9R - Thermal Overload Relay (For Ex9CS Miniature Contactors)

Green Highlight = Most Popular

12 A	
Rated Amperage (Min - Max)	Use with Contactors: Ex9CS06-12
	Catalog Number
0.1-0.16	Ex9R12B0.16A
0.16-0.25	Ex9R12B0.25A
0.25-0.4	Ex9R12B0.4A
0.4-0.63	Ex9R12B0.63A
0.63-1	Ex9R12B1A
1-1.6	Ex9R12B1.6A
1.6-2.5	Ex9R12B2.5A
2.5-4	Ex9R12B4A
4-6	Ex9R12B6A
5.5-8	Ex9R12B8A
7-10	Ex9R12B10A
9-12	Ex9R12B12A

			Ex9R
Tripping Class			Class 10/10A
Operating Frequency (Hz)			50/60
Phase Failure Protection Function			Yes
Automatic and Manual Reset			
Temperature Compensation			
Tripping Indicator			
Test and Stop Pushbutton			
Environmental Conditions	Altitude ft (m)		<6,562 (2,000)
	Pollution Degree		Class III
Rated Tripping Current (In)			1.2
Sensitivity to Phase Failure (In)			30%
Rated Working Voltage (V)			600
Rated Impulse Withstand Voltage Uimp			6 kV
Auxiliary Contacts	Number of Contacts		1NO+1NC
	Rated Operating Voltage Ue (V)	AC-15	220/380
		DC-13	220
	Rated Operating Current Ie (A)	AC-15	1.64 / 0.95
		DC-13	0.13
	Circuit Continuous Current		(5 A) 600 Vac, (1 A) 300 Vdc
	Contact Rating		B600, R300
	Terminal Wire Range AWG*		#18-12
	Terminal Torque in-lb (N.m)		15 (1.70)
	Terminal Wire Strip Length in		0.43

Ex9R	12 A											
Current Rated (A)	0.16-1.6						2.5-12					
Current Setting Range (A)	0.1-0.16	0.16-0.25	0.25-0.4	0.4-0.63	0.63-1	1-1.6	1.6-2.5	2.5-4	4-6	5.5-8	7-10	9-12
Short Circuit Rating, 3 Phase at 600 Vac (kA)	1						5					
Power Terminal	#18-10 AWG*											
Power Terminal Torque in-lb (N.m)	15 (1.7)											
Matched Contactor Type	Ex9CS06-12											
Matched Adapter	AD51UL											

* AWG = American Wire Gauge

AD51UL

Accessory Description	Catalog Number
Surface mount for Ex9R 0.16-12A only	AD51UL

Mounting Base	AD51UL
Current Rating (A)	12
Voltage (Vac)	600
Terminal Wire Range	#18-12 AWG*
Terminal Torque in-lb (N.m)	7 (0.80)
Matched Contactor Type	Ex9CS06-12

- Allows surface mounting of overload relays listed above (Ex9R 0.16-12A) remotely from miniature contactor (Ex9CS).

Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.

*NEC-National Electrical Code
** CEC-Canadian Electrical Code

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Contactors

Ex9CS/R Accessories

The Ex9CS/C line shares accessories and every contactor can be equipped with one front-mounted unit, two units of side-mounted contact (one from the left, the other from the right) and surge suppressor block.

- For contactors Ex9CS and Ex9CSR
- Field installable
- One unit used with a contactor

Accessory Description	Matched Contactor	Catalog Number
Auxiliary Contact Front Mount Mechanically Linked Contacts (in accordance with IEC 60947-5-1 Annex L) and Mirror Contacts (in accordance with IEC 60947-4-1 Annex F)	Ex9CS06-12 Ex9CSR06-12 (Front Mount)	AX4122UL

Auxiliary Contact Specifications		
UL Standard File Number		E353866
IEC Standard File Number		IEC/EN 60947-5-1
Certifications		UL Listed, CSA, CCC
Electrical Parameters		
Rated Frequency (Hz)		50/60
Rated Working Voltage Ue	AC-15 (V)	380/400/415
	DC-13 (V)	220/250
Rated Working Current Ie	AC-15 (A)	1.9A
	DC-13 (A)	0.31
Rated Capacity	AC-15 (VA)	720
	DC-13 (W)	69
Rated Thermal Current Ith (A)		10
Rated Impulse Withstand Voltage Uimp (kV)		6 (1.2/50 ms)
Rated Insulation Voltage Ui (V)		690
Mechanical Parameters		
Dimensions (L x W x H) in		1.46 x 1.30 x 1.54
Degree of Protection		IP 20
Terminals		Lift
Terminal Capacity AWG*		#18-12
Torque of Terminals in-lb (N.m)		7 (0.80)

- Reduces voltage peaks in control circuit
- Versions with varistor and RC circuit technology
- Includes cable lugs for connecting to contactor terminals

Accessory Description	Matched Contactor	Catalog Number
Surge Suppressor Block	Ex9CS06-12	CCU41BUL

Note: external surge protection accessory, CCU42BUL / CCU43BUL is not needed on the F-type contactor with a wide range coil since it is already integral to the coil.

Surge Suppressor Block Specifications	
Electrical Parameters	
Internal Technology	Varistor
Control Coil Voltage Uc (Protection Range)	24-48 Vac/dc 110-240 Vac/dc 380-415 Vac/dc
Maximum Peak Voltage Up (Uc)	2 kV
Mechanical Parameters	
Matched Contactor Type	Ex9CS06-12
Mounting	Mounts to Contactor Control Coil Terminals
Weight lb (kg)	0.04 (0.02)



Accessory Description	Suitable For	Catalog Number
Star Delta Wiring Kit (SDWK)	Ex9CS or Ex9CSR	SDWK41

* AWG = American Wire Gauge

Green Highlight = Most Popular

F

IEC Contactors

Ex9C 9-1000 Amperes Standard

Green Highlight = Most Popular

- Built-in auxiliary contacts; 1NO/1NC additional auxiliary contacts are front or side mounted
- Non-Reversing

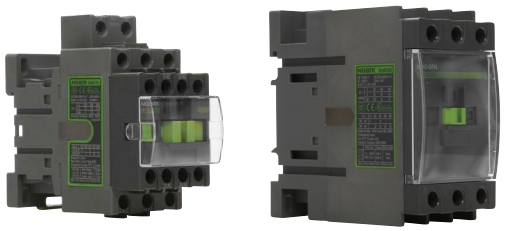

Certifications

IEC/EN 60947-1, 60947-4-1
UL 60947-1, 60947-4-1

Rated Amperage (A)		120 Vac Coil	Wide Range Electronic Coil (with built-in surge suppression) 24-60 Vac/dc Coil	48-130 Vac/dc Coil	100-250 Vac/dc Coil	250-500 Vac/dc Coil
		Catalog Number	Catalog Number	Catalog Number	Catalog Number	
		Power Poles - 3NO Auxiliary Contact - 1NO+1NC				
3-Pole	9	Ex9C0911G7	Ex9C09F11J	Ex9C09F11H	Ex9C09F11K	-
	12	Ex9C1211G7	Ex9C12F11J	Ex9C12F11H	Ex9C12F11K	-
	18	Ex9C1811G7	Ex9C18F11J	Ex9C18F11H	Ex9C18F11K	-
	25	Ex9C2511G7	Ex9C25F11J	Ex9C25F11H	Ex9C25F11K	-
	32	Ex9C3211G7	Ex9C32F11J	Ex9C32F11H	Ex9C32F11K	-
	38	Ex9C3811G7	Ex9C38F11J	Ex9C38F11H	Ex9C38F11K	-
	40	Ex9C4011G7	Ex9C40F11J	Ex9C40F11H	Ex9C40F11K	-
	50	Ex9C5011G7	Ex9C50F11J	Ex9C50F11H	Ex9C50F11K	-
	65	Ex9C6511G7	Ex9C65F11J	Ex9C65F11H	Ex9C65F11K	-
	80	Ex9C8011G7	Ex9C80F11J	Ex9C80F11H	Ex9C80F11K	-
	100	Ex9C10011G7	Ex9C100F11J	Ex9C100F11H	Ex9C100F11K	-
		Power Poles - 3NO Auxiliary Contact - 2NO+2NC				
	115	Ex9C115E22G	-	Ex9C115F22H	Ex9C115F22K	Ex9C115F22L
	150	Ex9C150E22G	-	Ex9C150F22H	Ex9C150F22K	Ex9C150F22L
	185	Ex9C185E22G	-	Ex9C185F22H	Ex9C185F22K	Ex9C185F22L
	225	Ex9C225E22G	-	Ex9C225F22H	Ex9C225F22K	Ex9C225F22L
	265	Ex9C265E22G	-	Ex9C265F22H	Ex9C265F22K	Ex9C265F22L
	300	Ex9C300E22G	-	Ex9C300F22H	Ex9C300F22K	Ex9C300F22L
	400	Ex9C400E22G	-	Ex9C400F22H	Ex9C400F22K	Ex9C400F22L
	500	Ex9C500E22G	-	Ex9C500F22H	Ex9C500F22K	Ex9C500F22L
	630	Ex9C630E22GG	-	-	-	-
	800	Ex9C800E22GG	-	-	-	-
	1,000	Ex9C1000E22GG	-	-	-	-

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Reversing Contactors

Ex9CR 9-500 Amperes Standard Reversing

Green Highlight = Most Popular

- Built-in auxiliary contacts; additional auxiliary contacts are front or side mounted
- Reversing
- Reversing contactor is comprised of 2 contactor joined by a mechanical interlock and power connection on 115A and above.

Certifications
IEC/EN 60947-1, 60947-4-1
UL 60947-1, 60947-4-1

Rated Amperage (A)		120 Vac Coil					
		Catalog Number	Components to build Reversing Contactor*				
		Power Poles - 3NO Auxiliary Contact - 1NO+1NC	Quantity	Contactor	Quantity	Mechanical Interlock	
3-Pole	9	Ex9CR0911G7	2	Ex9C0911G7	1	MIT42UL	
	12	Ex9CR1211G7	2	EX9C1211G7	1	MIT42UL	
	18	Ex9CR1811G7	2	EX9C1811G7	1	MIT42UL	
	25	Ex9CR2511G7	2	EX9C2511G7	1	MIT42UL	
	32	Ex9CR3211G7	2	EX9C3211G7	1	MIT42UL	
	38	Ex9CR3811G7	2	EX9C3811G7	1	MIT42UL	
	40	Ex9CR4011G7	2	EX9C4011G7	1	MIT43UL	
	50	Ex9CR5011G7	2	EX9C5011G7	1	MIT43UL	
	65	Ex9CR6511G7	2	EX9C6511G7	1	MIT43UL	
	80	Ex9CR8011G7	2	EX9C8011G7	1	MIT43UL	
	100	Ex9CR10011G7	2	EX9C10011G7	1	MIT43UL	

*Power connection not included for 09-100A

- Built-in auxiliary contacts; additional auxiliary contacts are front or side mounted
- Reversing
- Reversing contactor is comprised of 2 contactor joined by a mechanical interlock and power connection

Rated Amperage (A)		120 Vac Coil							
		Catalog Number	Components to build Reversing Contactor						
		Power Poles - 3NO Auxiliary Contact - 2NO+2NC	Quantity	Contactor	Quantity	Mechanical Interlock	Quantity	Power Connection	
3-Pole	115	Ex9CR115E22G	2	Ex9C115E22G	1	MIT44UL	1	PCL185UL	
	150	Ex9CR150E22G	2	Ex9C150E22G	1	MIT44UL	1	PCL185UL	
	185	Ex9CR185E22G	2	Ex9C185E22G	1	MIT44UL	1	PCL185UL	
	225	Ex9CR225E22G	2	Ex9C225E22G	1	MIT45UL	1	PCL300UL	
	265	Ex9CR265E22G	2	Ex9C265E22G	1	MIT45UL	1	PCL300UL	
	300	Ex9CR300E22G	2	Ex9C300E22G	1	MIT45UL	1	PCL300UL	
	400	Ex9CR400E22G	2	Ex9C400E22G	1	MIT46UL	1	PCL500UL	
	500	Ex9CR500E22G	2	Ex9C500E22G	1	MIT46UL	1	PCL500UL	

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Reversing Contactors

Ex9CR 115-500 Amperes Standard Reversing

- Built-in auxiliary contacts; additional auxiliary contacts are front or side mounted
- Reversing
- Reversing contactor is comprised of 2 contactor joined by a mechanical interlock and power connection

Green Highlight = Most Popular

Certifications

IEC/EN 60947-1, 60947-4-1
UL 60947-1, 60947-4-1

Rated Amperage (A)		Wide Range Electronic Coil (built-in surge suppression)		
		48-130Vac/dc Coil	100-250 Vac/dc Coil	250-500 Vac/dc Coil
		Catalog Number	Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 2NO+2NC		
3-Pole	115	Ex9CR115F22H	Ex9CR115F22K	Ex9CR115F22L
	150	Ex9CR150F22H	Ex9CR150F22K	Ex9CR150F22L
	185	Ex9CR185F22H	Ex9CR185F22K	Ex9CR185F22L
	225	Ex9CR225F22H	Ex9CR225F22K	Ex9CR225F22L
	265	Ex9CR265F22H	Ex9CR265F22K	Ex9CR265F22L
	300	Ex9CR300F22H	Ex9CR300F22K	Ex9CR300F22L
	400	Ex9CR400F22H	Ex9CR400F22K	Ex9CR400F22L
	500	Ex9CR500F22H	Ex9CR500F22K	Ex9CR500F22L

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Contactors

Ex9C/CR Technical Data

			Ex9C/CR							
			9	12	18	25	32	38	40	50
General Information										
Pole			3							
Production Standard			IEC 60947-1, IEC 60947-4-1, UL 60947-1, UL 60947-4-1							
Environmental Testing According to			IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-11, IEC 60068-2-30							
Rated Frequency (Hz)			50/60							
Conventional Free Air Thermal Current Ith (A)	0≤104 °F (0≤40 °C)		25		32	40	50		60	80
	0≤140 °F (0≤60 °C)									
	0≤158 °F (0≤70 °C)		17		22	28	35		42	56
Rated Insulating Voltage Ui (V)			690						1,000	
Rated Impulse Withstand Voltage Uimp (kV)			6						8	
Electrical Life	AC-3	380/400V	1,200,000							
	AC-4		50,000	40,000		50,000	40,000		35,000	30,000
Mechanical Life			10,000,000							
Operating Cycles Per Hour (cycles/h)	AC-3		1200			1000				
	AC-4		300			150			120	
Environmental Temperature	Transportation or Storage		-76 to 176 °F (-60 to +80 °C)							
	Working At		-4 to 140 °F (-20 to +60 °C)							
	Maximum		-40 to 158 °F (-40 to +70 °C)							
Altitude ft (m)			<6,562 (2,000)							
Pollution Degree			Class III							
Rated Operational Current Ie (A)										
At -82 to 131 °F (-25 to 40 °C)	AC-1	690V	25		32	40	50		60	80
	AC-3	380/400V	9	12	18	25	32	38	40	50
	AC-3	660/690V	6.7	9	10.6	17.3	21.9		34	39
	AC-4	380/400V	9	12	18	25	32		40	50
	AC-4	660/690V	6.7		8.9	14	17.3		34	39
Rated Power of 3-Phase Motor										
For IEC (kW)	AC-3	380/400 Vac	4	5.5	7.5	11	15	18.5		22
	AC-4									
	AC-3	660/690 Vac	5.5	7.5	9	15	18.5		30	33
	AC-4		5.5		7.5	11	15			
UL Rating										
Ith (A)			25		32	40	50		60	80
Single-Phase (HP)		110-120 Vac	0.5	1	1.5	2	3			5
		220-240 Vac	1.5	2	3		5		7.5	10
Three-Phase (HP)		200-208 Vac	3		5	7.5	10		10	15
		220-240 Vac							15	20
		440-480 Vac	5	7.5	10	15	20		30	40
		550-600 Vac	7.5	10	15	20	25			
Coil Voltage (V)			24-600 Vac, 24-250 Vac/dc							

F

IEC Contactors

Ex9C/CR Technical Data

			Ex9C/CR													
			65	80	100	115	150	185	225	265	300	400	500	630	800	1000
General Information																
Pole			3													
Production Standard			IEC 60947-1, IEC 60947-4-1, UL 60947-1, UL 60947-4-1													
Environmental Testing According to			IEC 60068-2-1, IEC 600682-2, IEC 60068-2-11, IEC 60068-2-30													
Rated Frequency (Hz)			50/60													
Conventional Free Air Thermal Current Ith (A)	0≤104 °F (0≤40 °C)		80	125		160	185	215	275	330	400	500	610	800	1000	1000
	0≤140 °F (0≤60 °C)						170	200	260	300	360	430	550	720	850	850
	0≤158 °F (0≤70 °C)		56	80		140	160	180	200	260	290	400	480	630	750	750
Rated Insulating Voltage Ui (V)			1,000											1,000		
Rated Impulse Withstand Voltage Uimp (kV)			8											8		
Electrical Life	AC-3	380/400V	1,200,000			1,000,000								800,000	500,000	
	AC-4		30,000		25,000	200,000								200, 000		
Mechanical Life			10,000,000			8,000,000						5,000,000		3,000,000		
Operating Cycles Per Hour (cycles/h)	AC-3		1,000	900		750		500				420		300		120
	AC-4		120			130								100		
Environmental Temperature	Transportation or Storage		-76 to 176 °F (-60 to +80 °C)													
	Working At		-4 to 140 °F (-20 to +60 °C)													
	Maximum		-40 to 158 °F (-40 to +70 °C)													
Altitude ft (m)			<6,562 (2,000)													
Pollution Degree			Class III													
Rated Operational Current Ie (A)																
At -82 to 131 °F (-25 to 40 °C)	AC-1	690V	80	125		160	185	215	275	330	400	500	650	800	1000	1260
	AC-3	380/400V	65	80	100	115	150	185	225	265	300	400	500	630	800	1000
	AC-3	660/690V	42	49				170			280		450	560	650	700
	AC-4	380/400V	65	80	100	54	68	81	96	117	125	150	175	225	242	260
	AC-4	660/690V	42	49		48	57	65	85	105	115	135	150	200	215	230
Rated Power of 3-Phase Motor																
For IEC (kW)	AC-3	230 Vac	-			37	45	55		75	90	132	160	200	250	315
	AC-4					18.5	22	30		37	40	45	55	75		80
	AC-3	380/400 Vac	30	37	45	55	75	90	110	132	160	220	250	335	450	560
	AC-4					30	37	45	55	63	75	90	100	110	132	150
	AC-3	660/690 Vac	37	45		110	132	160	200	250		355	400	560	630	710
	AC-4					50	55	63	80	100	110	132	150	185	200	220
	AC-3	1,000 Vac	-			75	90	90		132		250	315	400	450	500
	AC-4					50	55	63		80		110		150	200	
UL Rating																
Ith (A)			80	125		160	185	215	275	330	400	500	610	800	900	1000
Single-Phase (HP)		110-120 Vac	5	7.5	10	15	-			-				-		
		220-240 Vac	15	20		25	30	40								
Three-Phase (HP)		200-208 Vac	20	30	30	40	50	60		75	100	125	150	-		
		220-240 Vac	25		40	50	60	75		100	125	150	200	250	300	350
		440-480 Vac	50	60		100	125	150		200	250	300	400	500	600	750
		550-600 Vac				125	150	200		250	300	400	500	600	700	800
Coil Voltage (V)			24-600 Vac			24-600 Vac/dc						36-600 Vac/dc		48 - 480 Vac/dc		

IEC Contactors

Ex9C/CR Technical Data

			Ex9C/CR							
			9	12	18	25	32	38	40	50
Coil Electrical Parameters										
Tolerance of Control Voltage 50/60 Hz	Operation (Uc)	Standard	85% - 110%							
		AC/DC Widerange	85% - 110%							
	Drop-Off (Uc)	Standard	20% - 75% (AC) 10 - 75% (DC)							
		AC/DC Widerange	20% - 75% (AC), 10 - 75% (DC)							
Coil Power Consumption										
AC Only Coil		In Rush (VA)	90			100			240	
		Sealed (VA)	9.5			11.4			36.6	
DC Only Coil		Pick-Up (W)	7			17			36.6	
		Hold (W)	7			17			6	
AC/DC (Widerange)		In Rush (VA)	55						200	
		Sealed (VA)	5.1						6	
		Pick-Up (W)	30						150	
		Hold (W)	2						4.5	
Operating Time (ms)	AC Only and DC Only Coil	Operation	12-24			14-27			20-30	
		Drop-Off	6-20			7-22			8-20	
	AC/DC (Widerange)	Operation	45-65						50-100	
		Drop-Off	20-90						20-120	
IEC AC Contactor Working at DC Power Data										
	Rated Working Voltage (V)	Poles of Series Connection	Rated Working Current (A)							
Working Type: DC-1, Resistive Load Time Data: L/R≤1ms Environmental Temperature: ≤140 °F (≤60 °C)	24	1	20		25	32	40		50	65
		2								
		3								
	48/75	1								
		2								
		3								
	125	1	4			7				
		2	20		25	32	40		50	65
		3								
	225	1	1						1.5	
		2	4			7				
		3	20		25	32	40		50	65
IEC AC Contactor Working at DC Power Data										
	Rated Working Voltage (V)	Poles of Series Connection	Rated Working Current (A)							
Working Type: DC-2 to DC-5, Inductive Load Time Data: L/R≤15ms Environmental Temperature: ≤140 °F (≤60 °C)	24	1	20		25	32	40		50	65
		2								
		3								
	48/75	1	8							
		2	20		25					
		3								
	125	1	2			3			4	
		2	15			32	40		50	65
		3	20		25					
	225	1	0.5			1			1.5	
		2	2			3			4	
		3	8			32	40		50	65

F

IEC Contactors

Ex9C/CR Technical Data

			Ex9C/CR										Ex9C		
			65	80	100	115	150	185	225	265	300	400	500	630	800	1000
Coil Electrical Parameters																
Tolerance of Control Voltage 50/60 Hz		Operation (Uc)	85% - 110%													
		Drop-Off (Uc)	20% - 70%			20% - 60%										
Coil Power Consumption																
AC Only Coil		In Rush (VA)	240	280		400			590			600		850		
		Sealed (VA)	36			10										
DC Only Coil		Pick-Up (W)	17			400			590			600		850		
		Hold (W)				10										
AC/DC (Wide-range)		In Rush (VA)	200			400			590			600		-		
		Sealed (VA)	6			10								-		
		Pick-Up (W)	150			400			590			600		-		
		Hold (W)	4.5			10								-		
Operating Time (ms)	AC Only and DC Only Coil	Operation	20-30	20-35		31-64			45-100			58-95		100-180		
		Drop-Off	8-20	6-20		44-68			47-67			85-120		100-120		
	AC/DC Wide-range	Operation	50-100			31-64			45-100			58-95		-		
		Drop-Off	20-120			44-68			47-67			85-120		-		
IEC AC Contactor Working at DC Power Data																
	Rated Working Voltage (V)	Poles of Series Connection	Rated Working Current (A)													
Working Type: DC-1, Resistive Load Time Data: L/R≤1ms Environmental Temperature: ≤140 °F (≤60 °C)	24	1	65	100		160			200	300		400				
		2														
		3														
	48/75	1														
		2														
		3														
	125	1	7	12		18			33							
		2	65	100		160			200	300		400				
		3														
	225	1	1.5			3.4			3.8							
		2	7	12		20			30			40				
		3	65	100		160			200	300		400				
IEC AC Contactor Working at DC Power Data																
	Rated Working Voltage (V)	Poles of Series Connection	Rated Working Current (A)													
Working Type: DC-2 to DC-5, Inductive Load Time Data: L/R≤15ms Environmental Temperature: ≤140 °F (≤60 °C)	24	1	65	100		160			200	300		400				
		2														
		3														
	48/75	1														
		2														
		3														
	125	1	4	5		7.5			11							
		2	65	100		160			200	300		400				
		3														
	225	1	1.5	2		2.5										
		2	4	5		7.5			11							
		3	65	100		160			200	300		400				

IEC Contactors

Ex9C/CR Technical Data

		Ex9C/CR							
		9	12	18	25	32	38	40	50
Built-In Auxiliary Contacts									
Auxiliary Contacts		1NO+1NC, 2NO+2NC						1NO+1NC	
Rated Operation Voltage Ue (V)		690							
Rated Insulating Voltage Ui (V)									
Rated Impulse Withstand Voltage Uimp (kV)		6							
Rated Frequency (Hz)		50/60							
Conventional Free Air Thermal Current Ith (A)		10							
Rated Operational Current Ie (A)									
AC-15	120V	6							
	240V	3							
	380V	1.9							
	600V	1.2							
	125V	0.55							
	220V	0.31							
	250V	0.27							
Mounting	Screw (mm)	ø4						ø5	
	DIN rail (mm)	35						35 or 75	
Dimension LxWxH in		3.50 x 1.77 x 3.70			3.94 x 1.77 x 4.25			4.80 x 2.99 x 4.84	
Weight lb (kg)		0.77 (0.35)			0.88 (0.40)			2.71 (1.23)	
Degree of Protection		IP 20 (Control Circuit Terminal), IP 00 (Main Circuit Terminal)							
Main Power Terminal Connection									
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#18-10			#14-8			#14-4	
	Dual Cable								
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable								
	Dual Cable								
Screw Size ø (mm)		M3.5			M4			M8	
Torque of Terminals in-lb (N.m)		15 (1.70)			22 (2.50)			53 (6)	
Auxiliary Contact Terminal Connection									
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#18-12							
	Dual Cable								
Stiff Cable With Cold-Press Terminal AWG*	Single Cable								
	Dual Cable								
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable								
	Dual Cable								
Screw Size ø (mm)		M3.5							
Torque of Terminals in-lb (N.m)		15 (1.70)							

* AWG = American Wire Gauge

F

IEC Contactors

Ex9C/CR Technical Data

		Ex9C/CR										
		65	80	100	115	150	185	225	265	300	400	500
Built-In Auxiliary Contacts												
Auxiliary Contacts		1NO+1NC			2NO+2NC							
Rated Operation Voltage Ue (V)		690										
Rated Insulating Voltage Ui (V)												
Rated Impulse Withstand Voltage Uimp (kV)		6										
Rated Frequency (Hz)		50/60										
Conventional Free Air Thermal Current Ith (A)		10										
Rated Operational Current Ie (A)												
AC-15	24V	-			6							
	120V	6			-							
	230V	-			3.13							
	240V	3										
	380V	1.9			-							
	400V	-			1.8							
	600V	1.2			-							
	690V	-			1.04							
DC-13	24V	0.55										
	125V	0.55										
	220V	0.31										
	250V	0.27										
Mounting	Screw (mm)	ø5			ø8			ø9				
	DIN rail (mm)	35 or 75			-							
Dimension LxWxH in		4.80 x 2.99 x 4.84	5.12 x 3.43 x 5.12		6.81 x 4.72 x 6.85			8.39 x 5.71 x 8.19			8.50 x 6.30 x 9.02	
Weight lb (kg)		2.71 (1.23)	3.31 (1.50)		6.61 (3)			13.23 (6)			20.94 (9.5)	
Degree of Protection		IP 20										
Main Power Terminal Connection												
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#14-4	#12 - 1/0		(1x) #4 - (2x) 250 MCM			(1x) 1/0 - (2x) 500 MCM				
	Dual Cable		#12 - 1									
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable		#12 - 1/0									
	Dual Cable		#12 - 1									
Screw Size ø (mm)		M8						M10				
Torque of Terminals in-lb (N.m)		53 (6)	79 (9)		159 (18)			310 (35)				
Bus Bar Terminal Connection												
Bus Bar Size		-			2x0.75x0.25 (2x20x5)			2x1x0.25 (2x30x5)			2x1.25x0.25 (2x40x5)	
Screw Size ø (mm)					M8			M10				
Torque of Terminals in-lb (N.m)					159 (18)			310 (35)				
Auxiliary Contact Terminal Connection												
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#18-12										
	Dual Cable											
Stiff Cable With Cold-Press Terminal AWG*	Single Cable											
	Dual Cable											
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable											
	Dual Cable											
Screw Size ø (mm)		M3.5										
Torque of Terminals in-lb (N.m)		15 (1.70)										

* AWG = American Wire Gauge

IEC Contactors

Ex9C Technical Data

		Ex9C		
		630	800	1000
Built-In Auxiliary Contacts				
Auxiliary Contacts		2NO+2NC		
Rated Operation Voltage Ue (V)		690		
Rated Insulating Voltage Ui (V)				
Rated Impulse Withstand Voltage Uimp (kV)		6		
Rated Frequency (Hz)		50/60		
Conventional Free Air Thermal Current Ith (A)		10		
Rated Operational Current Ie (A)				
AC-15	24V	6		
	230V	3.13		
	240V	3		
	400V	1.8		
	690V	1.04		
DC-13	24V	0.55		
	125V	0.55		
	220V	0.31		
	250V	0.27		
Mounting	Screw (mm)	11.5		
	DIN rail (mm)	-		
Dimension LxWxH in		11.73 x 9.06 x 10.47	12.68 x 9.06 x 10.47	
Weight lb		44.53	48.5	49.16
Degree of Protection		IP 20 (Control Circuit Terminal) IP 00 (Main Circuit Terminal)		
Main Power Terminal Connection				
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	LTC25NB 250-600 LTC25NC 4/0-500	LTC26NC 3/0-750 LTC26ND 3/0-500	
	Dual Cable			
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable			
	Dual Cable			
Screw Size ø (mm)		M12	4*M10	
Torque of Terminals in-lb (N.m)		310(45)	310(35)	
Auxiliary Contact Terminal Connection				
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#18-12		
	Dual Cable			
Stiff Cable With Cold-Press Terminal AWG*	Single Cable			
	Dual Cable			
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable			
	Dual Cable			
Screw Size ø (mm)		M3.5		
Torque of Terminals in-lb (N.m)		15 (1.70)		

* AWG = American Wire Gauge

F

Thermal Overload Relays
Ex9R Product Overview

Features

- For use with Ex9C and Ex9CR*
- Rated current up to 500A @ 600 Vac, 50/60 Hz
- Adjustable current setting for overload protection
- Overload protection trip Class 10 and Class 10A
- Phase loss protection
- Automatic or manual reset selectable
- Status indication
- STOP and TEST function
- Direct mount to contactors or 35 mm DIN rail mounting base option
- 5-Year limited warranty

*see page 49 for overloads for use with miniature contactors.

5 years
LIMITED WARRANTY

Certifications

- UL Listed, File Number E353865, UL 60947-1 and 60947-4-1
- Certified for Canada CSA standards under cUL testing
- IEC/EN 60947-4-1
- CE Approved
- CCC Certified

c UL us LISTED

Thermal Overload Relays

Ex9R 38-500 Amperes

Green Highlight = Most Popular

Rated Amperage (Min - Max)	38A Use with Contactors: Ex9C9-38 Catalog Number
0.63-1	Ex9R38B1A
1-1.6	Ex9R38B1.6A
1.6-2.5	Ex9R38B2.5A
2.5-4	Ex9R38B4A
4-6	Ex9R38B6A
5.5-8	Ex9R38B8A
7-10	Ex9R38B10A
9-13	Ex9R38B13A
12-18	Ex9R38B18A
16-24	Ex9R38B24A
23-32	Ex9R38B32A
30-38	Ex9R38B38A

Rated Amperage (Min - Max)	100A Use with Contactors: Ex9C40-100 Catalog Number
23-32	Ex9R100B32A
30-40	Ex9R100B40A
37-50	Ex9R100B50A
48-65	Ex9R100B65A
55-70	Ex9R100B70A
63-80	Ex9R100B80A
80-104	Ex9R100B104A

Certifications

IEC/EN 60947-4-1

Rated Amperage (Min - Max)	185A Use with Contactors: Ex9C115-185 Catalog Number
75-115	Ex9R185B115A
110-150	Ex9R185B150A
140-210	Ex9R185B210A

Rated Amperage (Min - Max)	500A Use with Contactors: Ex9C225-500 Catalog Number
160-225	Ex9R500B225A
210-300	Ex9R500B300A
280-400	Ex9R500B400A
380-500	Ex9R500B500A

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Thermal Overload Relays

Ex9R Technical Data

			Ex9R
Tripping Class			Class 10/10A
Operating Frequency (Hz)			50/60
Phase Failure Protection Function			Yes
Automatic and Manual Reset			
Temperature Compensation			
Tripping Indicator			
Test and Stop Pushbutton			
Environmental Conditions	Altitude ft (m)		<6,562 (2,000)
	Pollution Degree		Class III
Rated Tripping Current (In)			1.2
Sensitivity to Phase Failure (In)			30%
Rated Working Voltage (V)			600
Rated Impulse Withstand Voltage Uimp			6 kV
Auxiliary Contacts	Number of Contacts		1NO+1NC
	Rated Operating Voltage Ue (V)	AC-15	220/380
		DC-13	220
	Rated Operating Current Ie (A)	AC-15	1.64 / 0.95
		DC-13	0.13
	Circuit Continuous Current		5 A 600 Vac, 1 A 300 Vdc
	Contact Rating		B600, R300
	Terminal Wire Range AWG*		#18-12
	Terminal Torque in-lb (N.m)		15 (1.70)
	Terminal Wire Strip Length in		0.43

* AWG = American Wire Gauge

Thermal Overload Relays

Ex9R Technical Data

Frame Size	38A											
Current Setting Range (A)	0.63-1	1-1.6	1.6-2.5	2.5-4	4-6	5.5-8	7-10	9-13	12-18	16-24	23-32	30-38
Short Circuit Rating, 3 Phase at 600 Vac (kA)	1		5									
Power Terminal	#18-8 AWG*											
Power Terminal Torque in-lb (N.m)	22 (2.5)											
Matched Contactor Type	Ex9C9-38											
Surface mount adapter for remote mounting	AD56UL											

Frame Size	100A						
Current Setting Range (A)	23-32	30-40	37-50	48-65	55-70	63-80	80-104
Short Circuit Rating, 3 Phase at 600 Vac (kA)	5			10			
Power Terminal	#12-1 AWG*						
Power Terminal Torque in-lb (N.m)	80 (9)						
Matched Contactor Type	Ex9C40-100						
Surface mount adapter for remote mounting	AD53UL						

Frame Size	185A		
Current Setting Range (A)	75-115	110-150	140-210
Short Circuit Rating, 3 Phase at 600 Vac (kA)	10		
Power Terminal	Bus Bar Only		
Power Terminal Torque in-lb (N.m)	159 (18)		
Matched Contactor Type	Ex9C115-185		
Surface mount adapter for remote mounting	AD54UL		

Frame Size	500A			
Current Setting Range (A)	160-225	210-300	280-400	380-500
Short Circuit Rating, 3 Phase at 600 Vac (kA)	30			
Power Terminal	Bus Bar Only			
Power Terminal Torque in-lb (N.m)	310 (35)			
Matched Contactor Type	Ex9C225-500			
Surface mount adapter for remote mounting	AD55UL			

* AWG = American Wire Gauge

IEC Contactors
Ex9C Accessories

Green Highlight = Most Popular

The Ex9CS/C line shares accessories and every contactor can be equipped with one front-mounted unit, two side-mounted contacts (one left, one right) and surge suppressor block.

Front Mount Auxiliary Contact

- Field installable
- One unit used with a contactor

Side Mount Auxiliary Contact

- Field installable
- One unit used with a contactor on the left side, another unit on the right side

Accessory Description	Matched Contactor	Auxiliary Contact	Catalog Number
Auxiliary Contact Mechanically Linked Contacts (in accordance with IEC 60947-5-1 Annex L) and Mirror Contacts (in accordance with IEC 60947-4-1 Annex F)	Ex9C09-500 Ex9CR09-500 (Front Mount)	1NO+1NC	AX4211UL
		2NO+2NC	AX4222UL
		3NO+1NC	AX4231UL
	Ex9C09-100 Ex9CR09-100 (Side Mount)	1NO+1NC	AX4311UL

Auxiliary Contact		Front Mount AX42		Side Mount AX43
UL Standard File Number		E353866		
IEC Standard File Number		IEC/EN 60947-5-1		
Certifications		UL Listed, CSA, CCC		
Electrical Parameters				
Rated Frequency (Hz)		50/60		
Rated Working Voltage Ue	AC-15 (V)	380/400/415		
	DC-13 (V)	220/250		
Rated Working Current Ie	AC-15 (A)	1.9A		
	DC-13 (A)	0.31		
Rated Capacity	AC-15 (VA)	720		
	DC-13 (W)	69		
Rated Thermal Current Ith (A)		10		
Rated Impulse Withstand Voltage Uimp (kV)		6 (1.2/50 ms)		
Rated Insulation Voltage Ui (V)		690		
Mechanical Parameters				
Device Width in		1.89		0.43
Device Height in		1.46		2.72
Device Depth in		1.02 (1NO+1NC)	1.77 (2NO+2NC, 3NO+1NC)	2.76 (1NO+1NC)
Degree of Protection		IP 20		
Terminals		Lift		
Terminal Capacity AWG*		#18-12		
Torque of Terminals in-lb (N.m)		15 (1.70)		

* AWG = American Wire Gauge

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Contactors
Ex9C Accessories

Green Highlight = Most Popular

Mechanical Interlock

Power Connection



Surge Suppressor Block

- Reduces voltage peaks in control circuit
- Versions with varistor and RC circuit technology
- Includes cable lugs for connecting to contactor terminals

Accessory Description	Matched Contactor	Catalog Number
Mechanical Interlock (for Ex9C)	Ex9C09-38	MIT42UL
	Ex9C40-100	MIT43UL
	Ex9C115-185	MIT44UL
	Ex9C225-300	MIT45UL
	Ex9C400-500	MIT46UL
Power Connection (for Ex9C)	Ex9C115-185	PCL185UL
	Ex9C225-300	PCL300UL
	Ex9C400-500	PCL500UL
Surge Suppressor Block	Ex9C09-38	CCU42BUL
	Ex9C40-100	CCU43BUL

Note: external surge protection accessory, CCU42BUL / CCU43BUL is not needed with wide range coil since it is already integral to the coil.

Specifications	CCU42	CCU43
Electrical Parameters		
Internal Technology	Resistance	
Control Coil Voltage Uc (Protection Range)	110-240 Vac/dc	
Maximum Peak Voltage Up (Uc)	3 kV	
Mechanical Parameters		
Matched Contactor Type	Ex9C09-38	Ex9C40-100
Mounting	Mounts to Contactor Control Coil Terminals	
Weight lb (kg)	0.04 (0.02)	

G

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Contactors
Ex9C Accessory Specifications

Accessory Description	Matched Contactor	Relay Type	Timing Range	Catalog Number
Time Delay Relay (Pneumatic Timer)	Ex9C09-500	Off Delay	0.1 - 3 s	AXCD0UL
			0.1 - 30 s	AXCD2UL
			10 - 180 s	AXCD4UL
		On Delay	0.1 - 3 s	AXCT0UL
			0.1 - 30 s	AXCT2UL
			10 - 180 s	AXCT4UL

Accessory Description	Type	Number of Holes	Catalog Number
Terminal Lugs (for Ex9C)	630A	2 Hole**	LTC25NBA or LTC25NB
		3 Hole**	LTC25NCA or LTC25NC
	800 / 1000A	3 Hole**	LTC26NCA or LTC26NC
		4 hole**	LTC26NDA or LTC26ND

** = See page 19 for terminal specifications.



Accessory Description	Suitable For	Catalog Number
Star Delta Wiring Kit	Ex9C 115-185	SDWK45



AD56UL

Accessory Description	Use with Relay	Catalog Number
Surface mount	Ex9R38	AD56UL
	Ex9R100	AD53UL
	Ex9R185	AD54UL
	Ex9R500	AD55UL

Green Highlight = Most Popular

Mounting Base	AD56UL	AD53UL	AD54UL	AD55UL
Current Rating (A)	38	104	185	500
Voltage (Vac)	600			
Terminal Wire Range AWG*	#18 - #8	#12 - #1	-	
Terminal Torque in-lb (N.m)	22 (2.50)	80 (9)		
Wire Strip Length in	0.51	0.71		
Matched Contactor Type	Ex9C09-38	Ex9C40-100	Ex9C115-185	Ex9C225-500

* AWG = American Wire Gauge

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Contactors
Ex9CDS Product Overview

Features

Ex9CDS are general purpose contactors used mainly for controlling 3-phase motors and power circuits up to 600 Vac. This entry level line includes magnetic coils and basic accessories for front and side mounting.

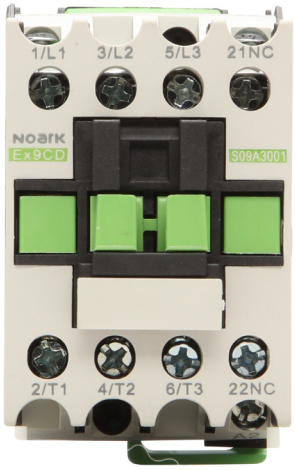

- 5 kA @ 600 Vac
- Built-in NO or NC auxiliary contacts on 9-32A frames
- 3 and 4-pole versions including 2NO+2NC and 4NO configurations
- 95 A mounts on standard 35mm DIN rail (40-95A can also mount on 75 mm DIN rail)
- 12 month warranty

Certifications

- UL Listed, File Number E353866
- Certified for Canada CSA standards 22.2 No. 14 under cUL testing
- IEC/EN 60947
- CE Compliant

IEC Contactors

Ex9CDS 9-95 A General Purpose

- Auxiliary contacts are side mounted; front mounted also available

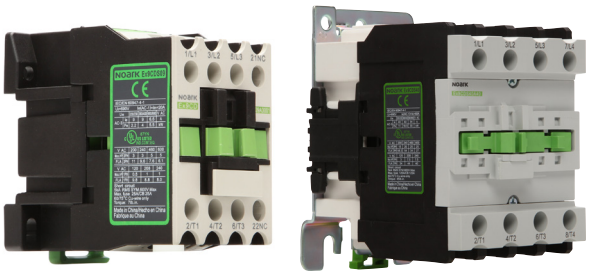

Green Highlight = Most Popular

Certifications

IEC/EN 60947-4-1

Rated Amperage (A)		120 Vac Coil	
		Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO	Power Poles - 3NO Auxiliary Contact - 1NC
3-Pole	9	Ex9CDS09A30G7A	Ex9CDS09A30G7B
	12	Ex9CDS12A30G7A	Ex9CDS12A30G7B
	18	Ex9CDS18A30G7A	Ex9CDS18A30G7B
	25	Ex9CDS25A30G7A	Ex9CDS25A30G7B
	32	Ex9CDS32A30G7A	Ex9CDS32A30G7B

Rated Amperage (A)		120 Vac Coil
		Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO/1NC
3-Pole	40	Ex9CDS40A30G7C
	50	Ex9CDS50A30G7C
	65	Ex9CDS65A30G7C
	80	Ex9CDS80A30G7C
	95	Ex9CDS95A30G7C

Rated Amperage (A)		120 Vac Coil	
		Catalog Number	Catalog Number
		Power Poles - 4NO	Power Poles - 2NO Auxiliary Contact - 2NC
4-Pole	9	Ex9CDS09A40G7	Ex9CDS09A22G7
	12	Ex9CDS12A40G7	Ex9CDS12A22G7
	25	Ex9CDS25A40G7	Ex9CDS25A22G7
	40	Ex9CDS40A40G7	Ex9CDS40A22G7
	50	Ex9CDS50A40G7	Ex9CDS50A22G7
	65	Ex9CDS65A40G7	Ex9CDS65A22G7
	80	Ex9CDS80A40G7	Ex9CDS80A22G7
	95	Ex9CDS95A40G7	Ex9CDS95A22G7

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Contactors

Ex9CDS Technical Data

Ex9CDS/CDR			09	12	18	25	32	40	50	65	80	95
Frame			Frame 1			Frame 2		Frame 3			Frame 4	
Poles			3 & 4		3	3 & 4	3	3 & 4				
Rated Insulation Voltage (Vac)			690									
Operating Frequency (Operations/h)	Electrical	AC-3	1,200				600					
		AC-4	300									
	Mechanical		3,600									
Electrical Life Operations		AC-3	1,000,000				800,000		600,000			
		AC-4	200,000					150,000			100,000	
Ambient Temperature			23 to 104°F (-5 to 40°C)									
Mechanical Life Operations			10,000,000				8,000,000				6,000,000	
Matched Overload Relay Type			Ex9RD25				Ex9RD36	Ex9RD93				
Rated Conventional Heating Current (A) AC-1			20		32	40	50	60	80		95	
AC-3	Ie (A)	220/230V	9	12	18	25	32	40	50	65	80	95
		380/400V										
		660/690V	6.6	8.9	12	18	21	34	39	42	49	
	Pe (kW)	220/230V	2.2	3	4	5.5	7.5	11	15	18.5	22	25
		380/400V	4	5.5	7.5	11	15	18.5	22	30	37	45
		660/690V	5.5	7.5	10	15	18.5	30	37		45	
Power of Controlled Three-Phase Cage Motor AC-3 (hp)		200V	3	5	7.5	7.5	10	15		20	25	30
		240V				10	15	20		25	30	
		460V	5	7.5	10	15	20	25	30	40		50
		600V										
Terminal Connection	**Number of Pieces**											
Flexible Cable with Cold-Pressed Socket AWG*	1		#16-14		#16-12		#14-10	#10-4			#8-2	
	2							#12-8			#10-6	
Flexible Cable without Cold-Pressed Socket AWG*	1		#16-12		#16-10	#1.5-10	#14-8	#10-4			#8-2	
	2		#1-2.5		#16-12	#1.5-6	#14-10	#4-10			#10-6	
Inflexible Cable AWG*	1		#16-12		#16-10		#14-8	#6-25			#8-2	
	2							#12-8			#10-6	
Screw Size			M3.5			M4		M8			M10	
Tightening Torque in-lb (N.m)			7 (0.80)			10 (1.20)		45 (3.50)			89 (10)	
Coil Parameters												
Coil Power	In-Rush (VA)		70			110		200				
	Sealed (VA)		8		8	11		20				
	Power (W)		1.8-2.7		3-4			6-10				
Operation Range	Operation Voltage (Us)		85-110%									
	Drop-Out Voltage (Us)		20-75%									
Coil Voltage (50/60 Hz)			120V									

* AWG = American Wire Gauge

IEC Contactors

Ex9CD/CM Accessories: Auxiliary Contact

Green Highlight = Most Popular

Front Mount

- For contactors Ex9CD
- Field installable
- One unit used with a contactor

Accessory Description		Matched Contactor	Contacts	Catalog Number
Auxiliary Contact Mechanically Linked Contacts (in accordance with IEC 60947-5-1 Annex L) and Mirror Contacts (in accordance with IEC 60947-4-1 Annex F)	Front Mount	Ex9CDS09-630 Ex9CDR09-630	1NO+1NC	AXA11
			2NO+2NC	AXA22

		Auxiliary Contact CDS Front Mount AXA 11 - 1 NO + 1NC / 22 - 2NO+2NC
UL Standard File Number		E353866
IEC Standard File Number		IEC/EN 60947-5-1
Certifications		UL Listed, CSA, CCC
Electrical Parameters		
Rated Frequency (Hz)		50/60
Rated Working Voltage Ue	AC-15 (V)	380/400/415
	DC-13 (V)	220/250
Rated Working Current Ie	AC-15 (A)	0.19
	DC-13 (A)	0.31
Rated Capacity	AC-15 (VA)	720
	DC-13 (W)	69
Rated Thermal Current Ith (A)		10
Rated Impulse Withstand Voltage Uimp (kV)		6 (1.2/50 μs)
Rated Insulation Voltage Ui (V)		690
Mechanical Parameters		
Device Width in		1.89
Device Height in		1.46
Device Depth in		1.02 / 1.77
Degree of Protection		IP 20
Terminal Capacity AWG*		#17-9
Torque of Terminals in-lb (N.m)		8.85 (1)

* AWG = American Wire Gauge

Safety Contactors
Ex9CA Product Overview

Features

The NOARK Ex9CA Safety Contactor is designed for use in safety function applications. It offers special features that allow the design of safe control circuits with current ratings up to 38 Amps.

The Normally Closed (NC) Auxiliary contact is a mirror contact to the main contacts and is mechanically linked to the Normally Open (NO) Auxiliary contacts. This allows for optimal design selections in SRP/CS*.

* SRP/CS is the term given by ISO short for safety–related part of a control system, meaning part of a control system that responds to safety-related input signals and generates safety-related output signals.

- Positively guided mirror contacts/mechanically linked contacts according to IEC/UL 60947-4-1 Annex F, IEC/UL 60947-5-1 Annex L
- Mirror contacts/ mechanically linked symbol on the side of auxiliary block
- Fixed transparent anti-dust cover for easy identification of the device action and prevents the manual operation
- AC or DC operating coils
- Integrated body with built in auxiliary contacts up to 2NC and 2NO
- Integrated surge suppression on DC coil models
- 5-Year limited warranty

5 years
LIMITED WARRANTY

Certifications

- UL Listed, File Number E353865, UL 60947-1
- Certified for Canada CSA standards under cUL testing
- IEC/EN 60947-4-1
- CE Approved
- CCC Certified

Safety Contactors

Ex9CA 9 - 38 A

Green Highlight = Most Popular

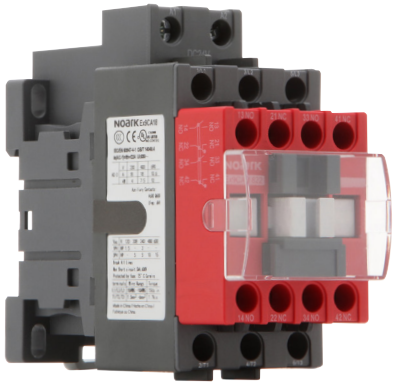

Certifications

IEC/EN 60947-4-1

CE cULus LISTED

Rated Amperage (A)		9A		12A	
Coil Voltage		Catalog Number	Catalog Number	Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO+1NC	Power Poles - 3NO Auxiliary Contact - 2NO+2NC	Power Poles - 3NO Auxiliary Contact - 1NO+1NC	Power Poles - 3NO Auxiliary Contact - 2NO+2NC
AC	120	Ex9CA0911G7	Ex9CA0922G7	Ex9CA1211G7	Ex9CA1222G7
DC	24	Ex9CA09D11B	Ex9CA09D22B	Ex9CA12D11B	Ex9CA12D22B

Rated Amperage (A)		18A		25A	
Coil Voltage		Catalog Number	Catalog Number	Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO+1NC	Power Poles - 3NO Auxiliary Contact - 2NO+2NC	Power Poles 3NO Auxiliary Contact - 1NO+1NC	Power Poles 3NO Auxiliary Contact - 2NO+2NC
AC	120	Ex9CA1811G7	Ex9CA1822G7	Ex9CA2511G7	Ex9CA2522G7
DC	24	Ex9CA18D11B	Ex9CA18D22B	Ex9CA25D11B	Ex9CA25D22B

Rated Amperage (A)		32A		38A	
Coil Voltage		Catalog Number	Catalog Number	Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO+1NC	Power Poles - 3NO Auxiliary Contact - 2NO+2NC	Power Poles - 3NO Auxiliary Contact - 1NO+1NC	Power Poles - 3NO Auxiliary Contact - 2NO+2NC
AC	120	Ex9CA3211G7	Ex9CA3222G7	Ex9CA3811G7	Ex9CA3822G7
DC	24	Ex9CA32D11B	Ex9CA32D22B	Ex9CA38D11B	Ex9CA38D22B

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Safety Contactors
Technical Data

			Ex9CA					
			9	12	18	25	32	38
General Information								
Pole			3					
Production Standard			IEC 60947-1, IEC 60947-4-1, UL 60947-1, UL 60947-4-1, GB/T14048.4					
Environmental Testing According to			IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-11, IEC 60068-2-30					
Rated Frequency (Hz)			50/60					
Conventional Free Air Thermal Current Ith (A)	0≤104 °F (0≤40 °C)		25		32	40	50	
	0≤140 °F (0≤60 °C)							
	0≤158 °F (0≤70 °C)		17		22	28	35	
Rated Insulating Voltage Ui (V)			690					
Rated Impulse Withstand Voltage Uimp (kV)			6					
Electrical Life	AC-3	380/400 V	1,200,000					
	AC-4		50,000	40,000		50,000	40,000	
Mechanical Life			10,000,000					
Operating Cycles Per Hour (cycles/h)	AC-3		1,200			1,000		
	AC-4		300			150		
Environmental Temperature	Transportation or Storage		-76 to 176 °F (-60 to +80 °C)					
	Working At		-4 to 140 °F (-20 to +60 °C)					
	Maximum		-40 to 158 °F (-40 to +70 °C)					
Altitude ft (m)			<6,562 (2,000)					
Pollution Degree			Class III					
Rated Operating Voltage (U e)	AC 50/60 HZ		24, 48, 120, 240					
	DC							
Rated Operational Current Ie (A)								
At -82 to 131 °F (-25 to 40 °C)	AC-1	690V	25		32	40	50	
	AC-3	380/400V	9	12	18	25	32	38
	AC-3	660/690V	6.7	9	10.6	17.3	21.9	
	AC-4	380/400V	9	12	18	25	32	
	AC-4	660/690V	6.7		8.9	14	17.3	
Rated Power of 3-Phase Motor								
For IEC (kW)	AC-3	230 Vac	-					
	AC-4							
	AC-3	380/400 Vac	4	5.5	7.5	11	15	18.5
	AC-4							15
	AC-3	660/690 Vac	5.5	7.5	9	15	18.5	
	AC-4		5.5		7.5	11	15	
	AC-3	1,000 Vac	-					
	AC-4							
UL Rating								
Ith (A)			25		32	40	50	
Single-Phase (HP)		110-120 Vac	0.5	1	1.5	2	3	
		220-240 Vac	1.5	2	3		5	
Three-Phase (HP)		200-208 Vac	3		5	7.5	10	
		220-240 Vac						
		440-480 Vac	5	7.5	10	15	20	
		550-600 Vac	7.5	10	15	20	25	

Safety Contactors
Technical Data

			Ex9CA					
			9	12	18	25	32	38
Auxiliary Contact Amerperage Ratings								
A600 AC (V)	Make and emergency interrupting capacity (Amp)	120V (A)	60					
		240V (A)	30					
		480V (A)	15					
		600V (A)	12					
	Normal load break (Amp)	120V (A)	6					
		240V (A)	3					
		480V (A)	1.6					
		600V (A)	1.2					
	Thermal current (Amp)		10					
Q600 DC (V)	Make and emergency interrupting capacity (Amp)	125V (A)	0.55					
		250V (A)	0.27					
		440V (A)	0.1					
		600V (A)	0.1					
	Normal load break (Amp)	125V (A)	0.55					
		250V (A)	0.27					
		440V (A)	0.1					
		600V (A)	0.1					
	Thermal current (Amp)		2.5					
Tolerance of Control Voltage								
AC control (50/60 Hz)		pick-up (Operating Voltage)	85…110%					
		dropout (Operating Voltage)	20…75%					
DC control		pick-up (Operating Voltage)	80…110%					
		dropout (Operating Voltage)	10…75%					
Coil Power Consumption								
AC control (50/60 Hz)		pick-up (VA)	120VA (Ex9CA09-18)/140VA (Ex9CA25-38)					
		hold-in (VA)	12VA (Ex9CA09-18)/14VA (Ex9CA25-38)					
DC control		pick-up (W)	≤70					
		hold-in (W)	≤3.5					
Operating Time								
AC		closing delay (ms)	15…30					
		opening delay (ms)	15…25					
DC		closing delay (ms)	100…170					
		opening delay (ms)	30-100					
Typical Lifetime								
B_{10D} Value (Electrical)		DC Coil	1,080,000			1,013,000		
		AC Coil	1,280,000			1,025,000		

H

Safety Control Relays
Ex9RCA Product Overview

Features

The NOARK Electric Ex9RCA Safety Control Relay is designed to provide fail-safe performance for safety function applications. It features mechanically linked contacts for use on safety feedback circuits with up to 8 contacts. When installed, the normally closed contact is force guided with the normally open contacts, making the Ex9RCA ideal for SRP/CS*.

* SRP/CS is the term given by ISO short for safety–related part of a control system, meaning part of a control system that responds to safety-related input signals and generates safety-related output signals

- Force guided/mechanically linked contacts as per IEC/UL 60947-5-1 Annex L
- Mechanically linked contacts symbol prominently displayed on red front cover
- Fixed transparent anti-dust cover allows easy identification of device action and prevents manual operation
- 4-pole models available with AC or DC operating coils
- 8-pole models available DC only
- Easily mounts on DIN 35mm or panel
- 5 year limited warranty

5 years LIMITED WARRANTY

Certifications

- UL Listed, File Number E353865, UL 60947-1
- Certified for Canada CSA standards under cUL testing
- IEC/EN 60947-5-1
- CE Approved
- CCC Certified

Safety Control Relays

Ex9RCA

Green Highlight = Most Popular

Certifications

IEC/EN 60947-4-1

CE c UL us LISTED

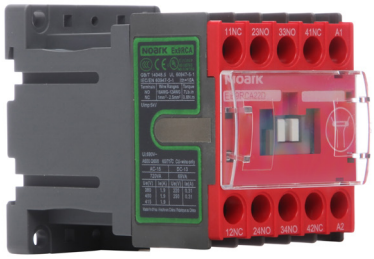

Coil Voltage		4-Pole		
		Catalog Number	Catalog Number	Catalog Number
		Contact Configuration 1NO+3NC	Contact Configuration 2NO+2NC	Contact Configuration 3NO+1NC
Vac	120	Ex9RCA13G	Ex9RCA22G	Ex9RCA31G
Vdc	24	Ex9RCA13DB	Ex9RCA22DB	Ex9RCA31DB

Coil Voltage		8-Pole		
		Catalog Number	Catalog Number	Catalog Number
		Contact Configuration 2NO+6NC	Contact Configuration 3NO+5NC	Contact Configuration 4NO+4NC
Vdc	24	Ex9RCA26DB	Ex9RCA35DB	Ex9RCA44DB

Coil Voltage		8-Pole		
		Catalog Number	Catalog Number	Catalog Number
		Contact Configuration 5NO+3NC	Contact Configuration 6NO+2NC	Contact Configuration 7NO+1NC
Vdc	24	Ex9RCA53DB	Ex9RCA62DB	Ex9RCA71DB

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Safety Control Relay
Technical Data

			Ex9RCA
General Information			
Poles			4, 8
Production Standard			UL 60947-5-1,GB/T 14048.5, IEC/EN 60947-5-1
Rated Operating Voltage (U e)	AC 50/60 HZ		24, 120
	DC		24
Rated Insulating Voltage U i (V)	IEC		690
	UL, CSA		600
Rated Impulse Withstand Voltage U imp (kV)			6
Electrical Life AC-15 (240V/2A)			1,000,000
Mechanical Life			10,000,000
Protection Class			IP20
Ambient Temperature	Transportation or Storage (°C)		-60…+80
	Operation at rated voltage (°C)		-20…+60
Max. Altitude of Installation Site ft (m)			<6,562 (2,000)
Auxiliary Contact Amerperage Ratings			
A600 AC (V)	Make and emergency interrupting capacity (Amp)	120V (A)	60
		240V (A)	30
		480V (A)	15
		600V (A)	12
	Normal load break (Amp)	120V (A)	6
		240V (A)	3
		480V (A)	1.6
		600V (A)	1.2
	Thermal current (Amp)		10
Q600 DC (V)	Make and emergency interrupting capacity (Amp)	125V (A)	0.55
		250V (A)	0.27
		440V (A)	0.1
		600V (A)	0.1
	Normal load break (Amp)	125V (A)	0.55
		250V (A)	0.27
		440V (A)	0.1
		600V (A)	0.1
	Thermal current (Amp)		2.5
Load Carrying Capacity per UL			
Rated voltage AC (V)			Max. 600
Continuous rating 40 °C (A)			10
Switching capacity AC (A)			A600
Rated voltage DC (V)			Max. 600
Switching capacity DC (A)			Q600
Tolerance of Control Voltage			
AC control (50/60 Hz)	pick-up (x Operating Voltage)		85%…110%
	dropout (x Operating Voltage)		20%…75%
DC control	pick-up (x Operating Voltage)		80%…110% (4-Pole), 85%…110%
	dropout (x Operating Voltage)		10%…75%
Coil Power Consumption			
AC control(50/60 Hz)	pick-up (VA)		40
	hold-in (VA)		9
DC control	pick-up (W)		3.2-4.0
	hold-in (W)		3.2-4.0
Operating Time			
AC	closing delay (ms)		15…30
	opening delay (ms)		15…25
DC	closing delay (ms)		25-40
	opening delay (ms)		10…15

22 mm Pushbuttons

Ex9PB Product Guide



J

22 mm Indicator Lights

Ex9IL Product Overview

Features

- UL listed and IP 40 (front)
- Compact profile and depth
- Operators mount in a round 7/8 in (22.5 mm) hole that is interchangeable with other industry products
- Modular construction makes assembly fast and simple

Certifications

- UL Listed, File Number E353866
- Certified for Canada CSA standards under cUL testing
- IEC/EN 60947
- VDE 0660
- CE Approved

22 mm Indicator Lights

Ex9IL2 Compact Curve Lampshade



Certifications

IEC/EN 60947-5-1

CE c UL us LISTED



Green Highlight = Most Popular

Resistance Type

Color	LED Lamp Voltage (Vac/dc)	Catalog Number
●	12	Ex9IL2C3
●	12	Ex9IL2C4
❍	24	Ex9IL2D1
●	24	Ex9IL2D3
●	24	Ex9IL2D4
●	24	Ex9IL2D5
●	24	Ex9IL2D6

Capacitance Type

Color	LED Lamp Voltage (Vac)	Catalog Number
❍	110/120	Ex9IL2N1
●	110/120	Ex9IL2N3
●	110/120	Ex9IL2N4
●	110/120	Ex9IL2N5
●	110/120	Ex9IL2N6
●	220/240	Ex9IL2H3
●	220/240	Ex9IL2H4

Specifications

		Ex9IL
Rated Operational Voltage Ue (V)	Vac	12-240
	Vdc	12-24
Rated Operational Current (mA)		Ie≤20
Service Life (h)		≥30,000
Brightness (cd/m^2)		≥60
Standard Colors		(Green) ● (Red) ●
Other Available Colors		(White)❍ (Yellow) ● (Blue) ●

Note: For AC power supply, the limit voltage range is 0.85Ue-1.1Ue between terminals.

J

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

22 mm Pushbuttons
Ex9PB Product Overview

Features

- Metal construction for superior durability and visual appeal
- UL recognized component and labeled IP 40 (front)
- LED replaceable lamps are standard
- Low behind the panel depth
- Operators mount in a round 7/8 in (22.5 mm) hole that is interchangeable with competitor's products
- Field convertible from maintained to momentary (available on maintained pushbuttons only)
- More than one million mechanical operations on momentary and half million on maintained pushbuttons

Certifications

- UL Recognized Component, File Number E353865
- Certified for Canada CSA standards under cUL testing
- IEC/EN 60947
- VDE 0660
- CE Approved

Specifications

		Ex9PB
Rated Operational Voltage Ue (V)		125
Rated Operational Current (mA)	DC-13	0.55
Illuminated Button Lamp Parameters		**Direct Type LED Lamp**
Rated Operational Current Ie (mA)		Ie≤20
Rated Operational Voltage (V)		6-230 Vac/dc

Note: Conventional thermal current Ith: 10A

22 mm Pushbuttons

Momentary Non-Illuminated

Certifications

IEC/EN 60947-5-1

CE cULus

Green Highlight = Most Popular

Momentary Flush*

Color	Contacts	Catalog Number
❍	1NO	Ex9PBA11
●		Ex9PBA21
●		Ex9PBA31
●		Ex9PBA41
●		Ex9PBA51
●		Ex9PBA61
❍	1NC	Ex9PBA12
●		Ex9PBA22
●		Ex9PBA32
●		Ex9PBA42
●		Ex9PBA52
●		Ex9PBA62
❍	1NO+1NC	Ex9PBA15
●		Ex9PBA25
●		Ex9PBA35
●		Ex9PBA45
●		Ex9PBA55
●		Ex9PBA65

Momentary Flush+Symbol*

Color	Contacts	Catalog Number
●	1NO	Ex9PBA3311
●	1NC	Ex9PBA4322

Momentary Extended

Color	Contacts	Catalog Number
●	1NO	Ex9PBL31
●	1NC	Ex9PBL42

* Ex9PBA momentary flush pushbuttons available up to IP 65. Contact a NOARK representative for more information.

Momentary ø40 mm Mushroom Head

Color	Contacts	Catalog Number
●	1NO+1NC	Ex9PBC35
●		Ex9PBC45

Momentary ø60 mm Mushroom Head

Color	Contacts	Catalog Number
●	1NO+1NC	Ex9PBR35
●		Ex9PBR45

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

K

22 mm Pushbuttons

Momentary and Push On/Twist Off Non-Illuminated

Certifications

IEC/EN 60947-5-1

CE cULus

Green Highlight = Most Popular

Push On/Twist Off ø30 mm Mushroom Head

Color	Contacts	Catalog Number
●	1NO	Ex9PBS441
	1NC	Ex9PBS442
	2NO	Ex9PBS443
	2NC	Ex9PBS444
	1NO+1NC	Ex9PBS445

Push On/Twist Off ø40 Mushroom Head

Color	Contacts	Catalog Number
●	1NO	Ex9PBS541
	1NC	Ex9PBS542
	2NO	Ex9PBS543
	2NC	Ex9PBS544
	1NO+1NC	Ex9PBS545

Push On/Twist Off ø60 Mushroom Head

Color	Contacts	Catalog Number
●	1NO	Ex9PBS641
	1NC	Ex9PBS642
	2NO	Ex9PBS643
	2NC	Ex9PBS644
	1NO+1NC	Ex9PBS645

Momentary Double Head - Flush

Color	Contacts	Catalog Number
● + ●	1NO+1NC	Ex9PBL8325

Momentary Double Head - Extended

Color	Contacts	Catalog Number
● + ●	1NO+1NC	Ex9PBL8425

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

22 mm Pushbuttons

Selector Switch Non-Illuminated

Certifications

IEC/EN 60947-5-1

CE cULus

Green Highlight = Most Popular

Selector Switch - Rotary Knob

Positions	Contacts	Catalog Number
		2-Position
	1NO+1NC	Ex9PBD25
	1NO+1NC	Ex9PBD45
		3-Position
	2NO	Ex9PBD33
	1NO+1NC	Ex9PBD35
	2NO	Ex9PBD53
	1NO+1NC	Ex9PBD55

Selector Switch - Rotary Handle

Positions	Contacts	Catalog Number
		2-Position
	1NO+1NC	Ex9PBJ25
	1NO+1NC	Ex9PBJ45
		3-Position
	2NO	Ex9PBJ33
	1NO+1NC	Ex9PBJ35
	2NO	Ex9PBJ53
	1NO+1NC	Ex9PBJ55

Selector Switch - Key

Positions	Contacts	Catalog Number
		2-Position
	1NO+1NC	Ex9PBG25
	1NO+1NC	Ex9PBG45
	1NO+1NC	Ex9PBG25B
		3-Position
	2NO	Ex9PBG33
	1NO+1NC	Ex9PBG35
	2NO	Ex9PBG53
	1NO+1NC	Ex9PBG55
	2NO	Ex9PBG33D
	1NO+1NC	Ex9PBG35D

= Key removed at this position only.

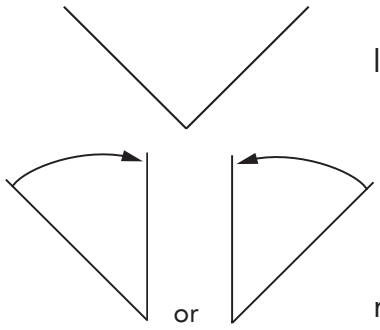

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

L

22 mm Pushbuttons
Illuminated and Contact Blocks

Certifications
IEC/EN 60947-5-1
CE cULus

Green Highlight = Most Popular

Momentary Flush with Guard

Color	LED Lamp Voltage Vac/dc	Catalog Number
		1NO
●	24	Ex9PBW3561D
●	24	Ex9PBW3661D
		2NO
●	24	Ex9PBW3363D
●	230	Ex9PBW3363H
		1NO+1NC
●	24	Ex9PBW3365D
●		Ex9PBW3465D
●	110	Ex9PBW3365N
●		Ex9PBW3465N

Momentary Double Head - Flush+Projecting

Color	Contacts	Catalog Number
		1NO+1NC
● + ●	24	Ex9PBW8465D
	110	Ex9PBW8465N

Indicator Light

Color	LED Lamp Voltage Vac/dc	Catalog Number
		1NO+1NC
●	24	Ex9PBV63D
●		Ex9PBV64D
●	110	Ex9PBV63N
●		Ex9PBV64N

Contact Blocks

Accessory Description	Poles	Catalog Number
Contact Block	NO	Ex9PBE101
Contact Block	NC	Ex9PBE102

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

22 mm Pushbuttons

Ex9PB Enclosures

Green Highlight = Most Popular

Accessory Description	Catalog Number
Enclosure 1-Hole *(Pushbuttons not included)*	Ex9PB01*
Enclosure 2-Hole *(Pushbuttons not included)*	Ex9PB02*
Enclosure 3-Hole *(Pushbuttons not included)*	Ex9PB03*

*NOTE: Empty enclosures are only compatible with Chint plastic buttons

Accessory Description	Catalog Number
Enclosure Start *(Pushbuttons included)*	Ex9PB101H29
Enclosure Stop/Start Rotary Handle *(Pushbuttons included)*	Ex9PB132H29

Accessory Description	Catalog Number
Enclosure Start/Stop *(Pushbuttons included)*	Ex9PB211H29
Enclosure Start/Stop *(Pushbuttons included)*	Ex9PB213
Enclosure Start/Stop *(Pushbuttons included)*	Ex9PB215

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Terms and Conditions of Sale

These general terms and conditions of sale (along with any associated written specification, quotation and/or supplemental terms and conditions provided by Seller) exclusively will govern the sale of all goods furnished to Buyer hereunder and represents the entire agreement between Buyer and Seller with respect thereto. Buyer‘s receipt or acceptance of delivery of any of the Products ordered or purchased hereunder will constitute its acceptance of these terms and conditions. No addition or modification to these terms and conditions will be binding on Seller unless agreed to in writing signed by an authorized representative at Seller‘s headquarters. Seller objects to and rejects other terms and conditions that may be proposed by Buyer or that appear on or are referenced in Buyer‘s purchase order or requisition that are in addition to or otherwise not consistent with the terms and conditions set forth or referenced herein.

PAYMENT TERMS
Payment terms are Net 30 days (Net thirty days) from date of invoice with ongoing approved credit as determined by Seller. No payment by offset is permitted. Interest charges will be added to overdue invoices at the rate of 1.5% per month (subject to any limit imposed by applicable law).

DELIVERY TERMS
Standard delivery terms are FOB Pomona, CA, freight prepaid and billed or as otherwise agreed to as evidenced by Seller‘s order acknowledgment. Acknowledged shipping dates are approximate only and based on prompt receipt of all necessary information from Buyer. International orders shall be Ex Works Shanghai. Seller disclaims all liability for late delivery.

RISK OF LOSS
Risk of loss or damage will pass to the buyer at the point of shipment

LIMITED WARRANTY
Seller warrants that new Products (excluding Ex9CDS series) furnished hereunder will be free from defects in material, workmanship and design for a period of five (5) years from the date of invoice from Seller or its appointed distributor, as the case may be. Ex9CDS series product are warranted to be free of defects in material, workmanship and design for a period of (1) year from the date of invoice from Seller or its appointed distributor as the case may be.

Remedies under the above warranties will be limited, at Seller‘s option, to the replacement, repair, or issuance of a credit for the purchase price, of the Products involved, and only after the return of such Products pursuant to Seller‘s instructions. The foregoing will be the exclusive remedies for any breach of warranty or breach of contract arising therefrom.

Warranty satisfaction is available only if (a) Seller is provided prompt written notice of the warranty claim and (b) Seller‘s examination discloses that any alleged defect has not been caused by misuse; neglect; improper installation, operation, maintenance, repair, alteration or modification by other than Seller; accident; or unusual deterioration or degradation of the Products or parts thereof due to physical environment or electrical or electromagnetic noise environment.

THE ABOVE WARRANTIES ARE IN LIEU OF ALL OTHER WARRANTIES AND CONDITIONS, WHETHER EXPRESSED, IMPLIED OR STATUTORY, INCLUDING IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE, OR PERFORMANCE OR APPLICATION WARRANTIES, TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW.

DISCLAIMER AND LIMITATION OF LIABILITY
To the fullest extent permitted by applicable law, seller will not be liable for any business interruption or loss of profit, revenue, materials, anticipated savings, data, contract, goodwill or the like (whether direct or indirect in nature) or for any other form of incidental, indirect or consequential damages of any kind. Seller‘s maximum cumulative liability relative to all other claims and liabilities, including obligations under any indemnity, whether or not insured, will not exceed the cost of the product(s) giving rise to the claim or liability. Seller disclaims all liability relative to gratuitous information or assistance provided by, but not required of seller hereunder. Any action against seller must be brought within eighteen (18) months after the cause of action accrues. These disclaimers and limitations of liability will apply regardless of any other contrary provision hereof and regardless of the form of action, whether in contract, tort (including negligence and strict liability) or otherwise, and further will extend to the benefit of seller‘s vendors, appointed distributors and other authorized resellers as third-party beneficiaries. Each provision hereof which provides for a limitation of liability, disclaimer of warranty or condition or exclusion of damages is severable and independent of any other provision and is to be enforced as such.

FORCE MAJEURE
Seller shall not be liable for delay in performance due to fire, flood, strike or other labor difficulty, act of god, act of government authority or of the acts of the Buyer, acts of terrorism, riot, embargo, epidemic, fuel or energy storage, car shortage, wrecks or delays in transportation, or due to any other cause beyond Seller‘s reasonable control.

LIQUIDATED DAMAGES
Any orders that include liquidated damages are not acceptable or binding on the seller.

PRICES
Prices and other information shown in any Seller publication (including product catalogs and brochures) are subject to change without notice and to confirmation by specific quotation. Such publications are not offers to sell and are maintained only as a source of general information. Unless otherwise noted in writing, all price quotations are conditioned upon acceptance by Buyer within thirty (30) days from quotation date.

TAXES
Taxes are not included in the price of the goods. Buyer is responsible for all applicable taxes:

TARIFF
A tariff surcharge may be added to the order and will amount will be determined by the present tariff condition during the sale

MINIMUM ORDERS
$250 minimum order. $25 minimum order fee will be added to any orders less than $250. Minimum order quantities also apply.
CHANGES AND SUBSTITUTIONS
Buyer-requested order changes, including those affecting the identity, scope and delivery of the Products, must be documented in writing and are subject to Seller‘s prior approval and adjustments in price, scheduling and other affected terms and conditions.

Any exceptions to the policy must be approved by the Director of Marketing and Sales and/or the General Manager

NOARK Electric North America
(626) 330-7007
na.noark-electric.com • nasales@noark-electric.com



Note: NOARK Electric reserves the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. NOARK Electric does not accept any responsibility whatsoever for potential errors or possible lack of information in this document. NOARK Electric reserves all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of NOARK Electric.

© 2021 NOARK Electric • All Rights Reserved